



US006025774A

**United States Patent** [19]  
**Forbes**

[11] **Patent Number:** **6,025,774**  
[45] **Date of Patent:** **Feb. 15, 2000**

[54] **METHOD FOR RETRIEVING VEHICULAR COLLATERAL**

5,652,707	7/1997	Wortham .....	340/990
5,673,305	9/1997	Ross .....	379/58
5,914,675	6/1999	Tognazzini .....	340/426
5,929,752	7/1999	Janky et al. ....	340/988

[76] Inventor: **Mark P. Forbes**, 27758 Santa Margarita Pkwy., #314, Mission Viejo, Calif. 92691

**OTHER PUBLICATIONS**

Lo Jack flyer of 1 page "Lo Jack Protects Your Car . . . "

*Primary Examiner*—Brent A. Swarhout  
*Attorney, Agent, or Firm*—Stetina Brunda Garred & Brucker

[21] Appl. No.: **09/103,419**

[22] Filed: **Jun. 24, 1998**

[51] **Int. Cl.<sup>7</sup>** ..... **B60R 25/10**

[52] **U.S. Cl.** ..... **340/426; 325/384; 340/988; 342/457; 701/213; 705/38**

[58] **Field of Search** ..... 340/988, 989, 340/990, 426, 928; 342/457; 701/207, 208, 213; 180/287; 705/38; 235/379, 380, 384

[56] **References Cited**


**U.S. PATENT DOCUMENTS**

4,736,294	4/1988	Gill et al. .	
5,323,315	6/1994	Highbloom .	
5,450,329	9/1995	Tanner .	
5,459,304	10/1995	Eisenmann .....	235/380
5,513,244	4/1996	Joao et al. ....	379/58
5,519,621	5/1996	Wortham .....	340/989
5,612,683	3/1997	Trempala et al. ....	340/825.31
5,629,693	5/1997	Janky .....	340/988

[57] **ABSTRACT**

In accordance with the present invention, there is provided a method of securing collateral for a loan when indicated by a loan status wherein the collateral is a vehicle. The method provides for installing a transmitter within the vehicle. The transmitter is capable of transmitting locational data regarding the vehicle. The loan status is monitored for a default condition. A data link is established from a base terminal to the transmitter of the vehicle upon an occurrence of the default condition in the loan status. Locational data is transmitted from the transmitter of the vehicle to the base terminal via the data link. The location of the vehicle is determined from the locational data transmitted to the base terminal. Finally, the vehicle is confiscated.

**15 Claims, 2 Drawing Sheets**

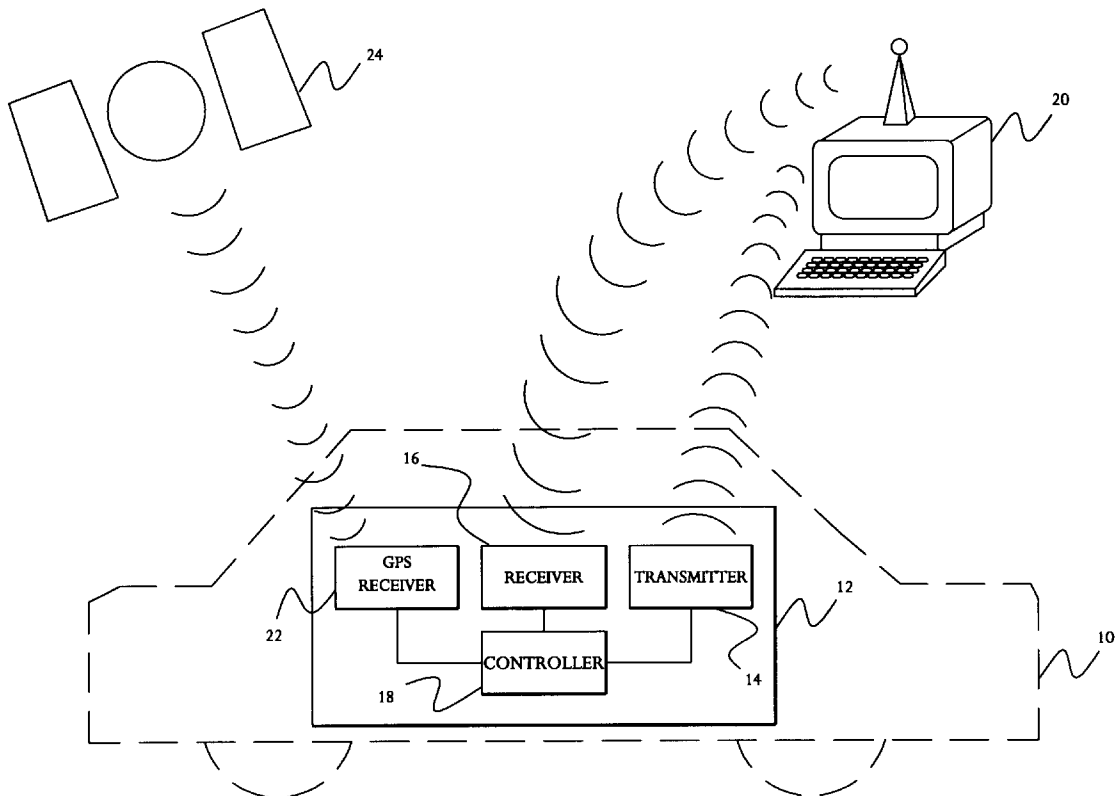

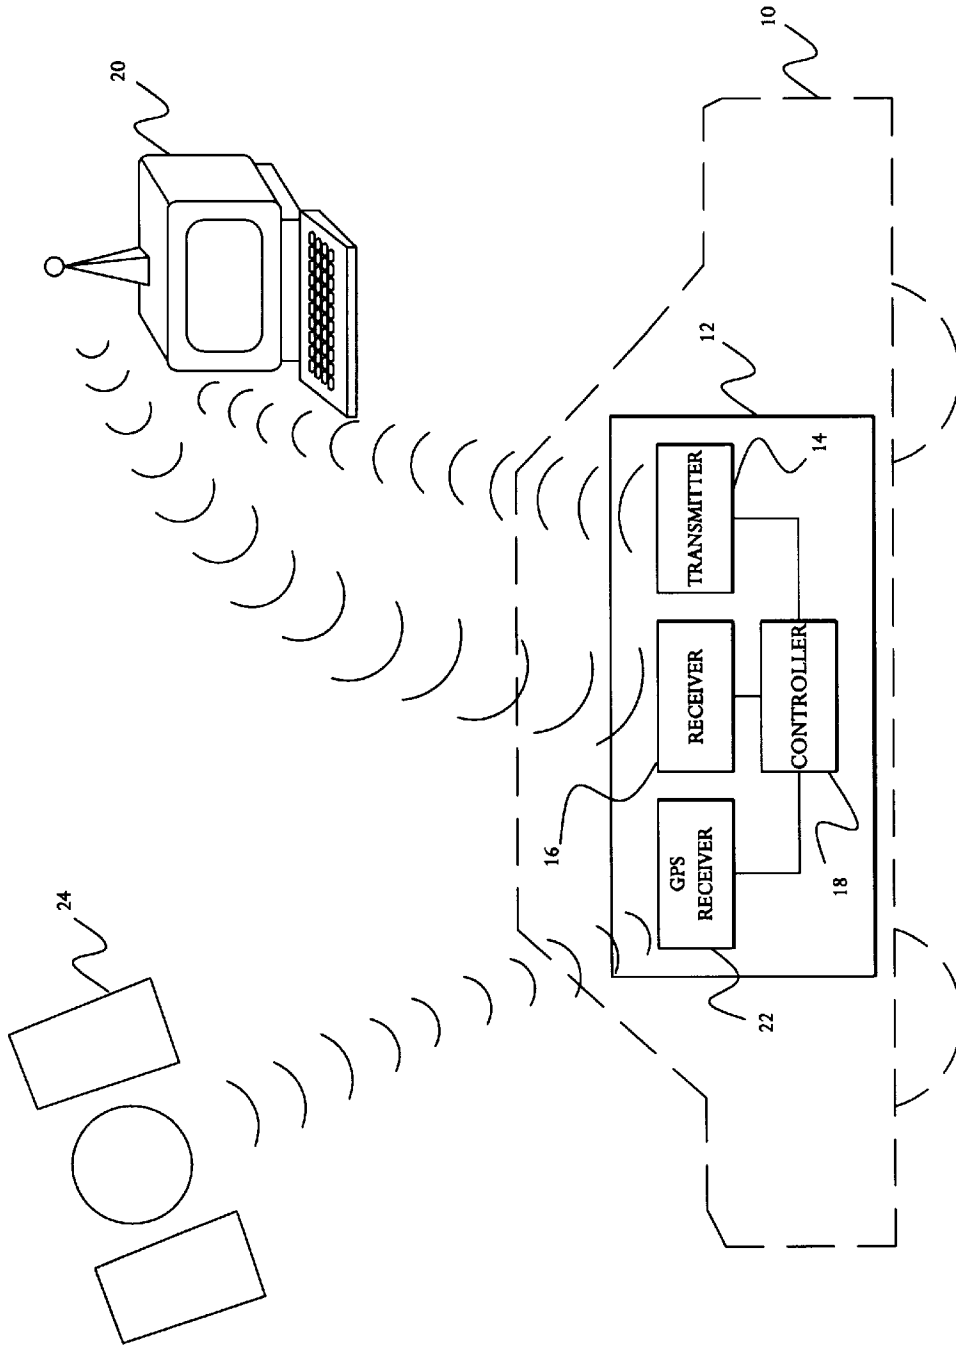


Fig. 1

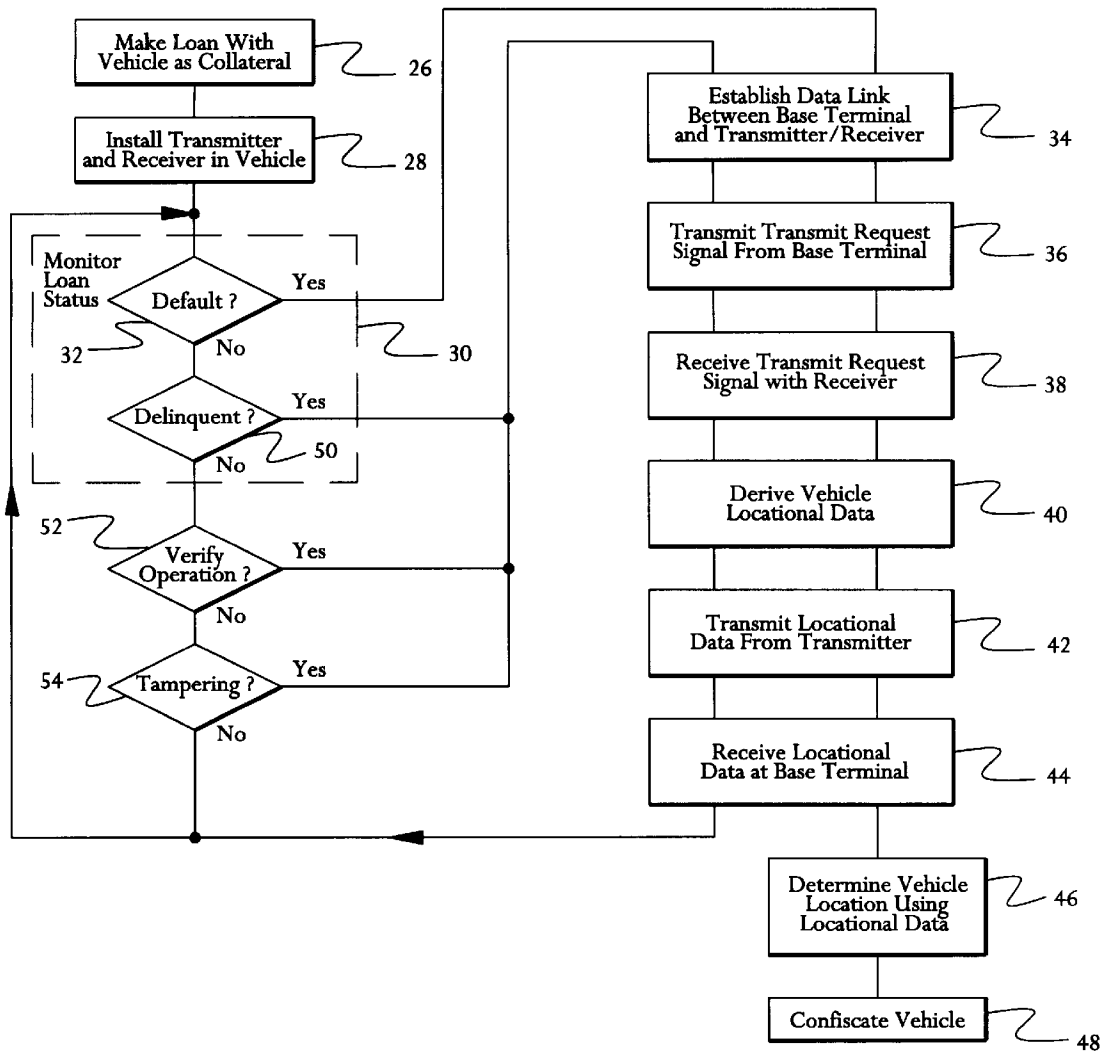


Fig. 2

## METHOD FOR RETRIEVING VEHICULAR COLLATERAL

### FIELD OF THE INVENTION

The present invention relates generally to a method of collateral retrieval, and more particularly to a method of retrieving vehicular collateral in which a transmitter is installed in the vehicle which provides locational data.

### BACKGROUND OF THE INVENTION

Generally, vehicles such as automobiles have been financed through a personal loan system, whereby the purchaser borrows money from a financial or lending institution, takes title to the automobile and pays the loan balance in monthly payments which amortize the full amount of the loan. Typically, the financial institution retains a lien interest against the title of the vehicle and the loan is secured by a chattel mortgage thereon. The financial institution may confiscate or repossess the vehicle upon a default condition of the loan, as agreed to by the purchaser or as provided at law. It is contemplated that a default condition may arise where the loan payments are delinquent for a predetermined interval. Thus, the vehicle is used as collateral for the loan used to purchase the vehicle.

Additionally, lease arrangements are entered into whereby the lessee makes monthly rental payment, returning the vehicle to the lessor at the end of a predetermined term specified in the lease. Title typically remains with the lessor. It is sometimes specified in the lease that the lessee may at the lessee's option purchase the vehicle when the lease expires. In the event that the lessee defaults in making lease payments, the lessor may confiscate or repossess the vehicle.

Thus, upon a default condition of the loan or lease (these terms may be used interchangeably herein) the lending institution may seek to confiscate the loan collateral, i.e., the vehicle. Thus, the lending institution will authorize repossession personnel to confiscate the vehicle. Such confiscation processes may potentially require extensive resources and result in a time consumptive, expensive endeavor. Typically, the repossession personnel being the confiscation process with nothing more than the vehicle holder's last known billing address. Not only may such address be no longer valid, the vehicle may not be kept or stored at such location. Moreover, the individual responsible for the loan may even be actively avoiding being located and the vehicle being repossessed.

### SUMMARY OF THE INVENTION

In accordance with the present invention, there is provided a method of securing collateral for a loan when indicated by a loan status wherein the collateral is a vehicle. The method provides for installing a transmitter within the vehicle. The transmitter is capable of transmitting locational data regarding the vehicle. The loan status is monitored for a default condition. A data link is established from a base terminal to the transmitter of the vehicle upon an occurrence of the default condition in the loan status. Locational data is transmitted from the transmitter of the vehicle to the base terminal via the data link. The location of the vehicle is determined from the locational data transmitted to the base terminal. Finally, the vehicle is confiscated.

Preferably, the data link is established at predetermined intervals and locational data from the transmitter to the base terminal is transmitted via the data link to verify the operation of the transmitter. In addition, the transmitter is capable

of sensing any physical tampering therewith and a tamper signal is transmitted in response to any sensed tampering via data link. Advantageously, the transmitter may be powered with a rechargeable battery. Furthermore, the method of the present invention may provide for deactivating the vehicle and enabling a vehicle alarm upon the loan status being in a default condition. In other embodiments of the present invention, the transmitter may be a cellular telephone and locational data may be based upon Global Positioning Satellite (GPS) technology.

As such, based on the foregoing, the present invention mitigates the inefficiencies and limitations associated with prior art methods of retrieving vehicular collateral. Advantageously, the method of the present invention facilitates expedient location and confiscation of vehicular collateral. The transmitter allows a lending institution to virtually instantaneously determine the location of a collateralized vehicle upon the loan status being in a default condition. In addition, the method may utilize current GPS technology to determine with a high degree of precision the location of the vehicle. Further still, the method may provide for an alarm within the vehicle to be enabled so as to further facilitate location and confiscation of the vehicle. In comparison, traditional methods of vehicular collateral retrieval typically begin with the lending institution via an agent thereof using only the last documented address for the individual responsible for the loan. Not only may such address be no longer valid, the vehicle may not be kept or stored at such location. Moreover, the individual responsible for the loan may even be actively avoiding being located and the vehicle being repossessed. As such, vehicle confiscation process may potentially be long and costly.

Additionally, the method of the present invention preferably provides for a verification process of operability of the transmitter. As such, the lending institution is able to test the installed transmitter by having the transmitter periodically send signals. Further, the method provides for the transmitter to alert the lending institution if the transmitter is tampered with. Thus, the lending institution has the benefit being confident that there is a high probability of retrieving the vehicle, should such course of action be necessary, by being able both verify the operability of the transmitter and having a tamper alert system in place.

Accordingly, the present invention represents a significant advance in the art.

### BRIEF DESCRIPTION OF THE DRAWINGS

These, as well as other features of the present invention, will become more apparent upon reference to the drawings wherein:

FIG. 1 symbolically depicts vehicle retrieval apparatus and system configuration utilized in the preferred embodiment of the present invention; and

FIG. 2 a flow diagram of steps of the method of the present invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings wherein the showings are for purposes of illustrating a preferred embodiment of the present invention only, and not for purposes of limiting the same, FIGS. 1 and 2 illustrate a method of retrieving vehicular collateral in accordance with the present invention.

As a preliminary matter, it is contemplated that a lending institution makes a loan/lease arrangement with a bor-

rower respecting a vehicle **10**. The vehicle **10** is used as collateral for the loan. Whether the vehicle **10** is purchased, leased or rented, it is understood that the party seeking to secure, confiscate, repossess or otherwise seize the vehicle may be a bank, savings and loan, mortgage company, credit union, vehicle dealership, vehicle manufacturer, leasing agent, collection agency, or any other lending/financial institution and agents thereof. It is further understood that the holder or possessor of the vehicle may be the individual responsible for payment of the vehicle loan/lease and may be referred to as the purchaser, debtor, borrower or lessee. For purposes of the present invention, the term vehicle **10** is contemplated to include automobiles, trucks, motor cycles, boats, house boats, airplanes, helicopters, house trailers, mobile homes, recreational vehicles, heavy machinery (such as tractors) and other devices used for transportation.

In accordance with the present invention, there is provided a method of securing vehicular collateral when indicated by a loan status. The loan status may have a paid current condition and a default condition. When the loan status is in a default condition, it is contemplated that the lending institution may be entitled to confiscate or repossess the vehicle **10**.

The method provides for installing **28** a transmitter **14** within the vehicle **10**. The transmitter **14** is capable of transmitting locational data regarding the vehicle **10**. The loan status is monitored **30** for a default condition **32**. Upon an occurrence of the default condition **32** in the loan status, a data link is established **34** from a base terminal **20** to the transmitter **14** of the vehicle **10**. Locational data is transmitted **42** from the transmitter **14** of the vehicle **10** to the base terminal **20** via the data link. The location of the vehicle **10** is determined **46** from the locational data transmitted to the base terminal **20**. Thus, as early as the loan status having entered into a default condition, the general whereabouts of the collateralized vehicle **10** may be known to the lending institution, e.g., the base terminal **20**. Finally, the method provides for the vehicle **10** to be confiscated **48**, and thus completing the collateral securing process.

In the preferred embodiment of the method of the present invention, a retrieval apparatus **12** is installed **28** in the vehicle **10**. The retrieval apparatus **12** is provided with the transmitter **14**, a base communication receiver **16** and a controller **18**. It is contemplated that the transmitter **14** and base communication receiver **16** may be the same device, i.e., a transceiver. Furthermore, the transmitter **14** and base communication receiver **16** may take the form of a cellular telephone or other communications device. The transmitter **14** and the base communication receiver **16** are capable of respectively transmitting and receiving signals to and from the base terminal **20**. Such signals are distinct electromagnetic digital signals which may be RF signal, for example. It is contemplated that the retrieval apparatus **12** need not necessarily be provided with a base communication receiver **16**. Thus, the retrieval apparatus **12** may be passive in nature and may periodically or constantly transmit locational signals.

The transmitter **14** and base communication receiver **16** are electrically connected to a controller **18**. The controller **18** may be any type of digital processing device, or computer, such as a microprocessor. The use of a microprocessor as the controller **18** provides for versatility in programmability and provides for an apparatus which can be made as small in size as possible. By providing for an apparatus which is as small in size as possible, a more concealed installation of the retrieval apparatus **12** in the vehicle **10** can be achieved.

In operation, the base terminal **20** may be in electrical communication with a computer network of the lending institution. The computer network contains data respecting the status of the loan. Upon the loan status being in a default condition **32**, the base terminal **20** originates and transmits **36** a transmit request signal. The base communication receiver **16** is configured to receive the transmit request signal from the base terminal **20**. Thus, a data link is established **34** between the base terminal **20** and retrieval apparatus **12** disposed within the vehicle **10**. The base communication receiver **16** receives **38** the transmit request signal and the controller **18** processes the transmit request signal. In response, the controller **18** initiates the transmitter **14** to transmit **42** locational data of the vehicle **10** to the base terminal **20** via the data link.

It is contemplated that the loan status may further have a delinquent condition, wherein the loan is not paid current. The default condition is one where the loan has not been paid current for a predetermined interval. Thus, typically prior to the loan status being in a default condition, the loan status will be in a delinquent condition. Such a delinquent condition may be used to trigger the transmission of a transmit request signal from the base terminal **20** to the retrieval apparatus **12** as discussed above. Thus, the method of the present invention may further include monitoring **30** the status of the loan for a delinquent condition **50** and subsequently establishing **34** a data link from the base terminal **20** to the transmitter **14** upon an occurrence of the delinquent condition. The locational data received **44** by the base terminal **20** in response to the transmit request signal may be stored for future use. For example, in the event that the retrieval apparatus **12** is later damaged or inoperable and the loan status is in a default condition, the stored locational data may provide a valuable lead for the repossession personnel to locate and confiscate the vehicle **10**.

Subsequent to the receipt of the transmit request signal by the base communication receiver **16**, the vehicle locational data **40** is derived regarding the vehicle **10**. Various methods deriving **40** such data may be utilized. It is contemplated that those methods of configuring a system to derive locational data respecting the location of the vehicle **10** utilizing a transmitter and/or receiver are chosen from those well known to one of ordinary skill in the art. In a very simple embodiment, the transmitted signals from the transmitter **14** themselves provide locational data. In this respect, such signals provide directional data which can be used to locate the emanating source, i.e., the transmitter **14** in the vehicle **10**. In such an embodiment, the base terminal **20** may additionally be mobile and directionally receive the transmitted signals. In another embodiment, the base terminal **20** may be in electronic communication with a plurality of mobile base terminals or an array of antennas which are directionally sensitive and thereby facilitating triangulation techniques to locate the vehicle **10**.

In the preferred embodiment of the present invention, however, Global Positioning Satellite (GPS) technology is used to derive **40** the locational data. The retrieval apparatus **10** may further be provided with a GPS positioning signal receiver **22**. A GPS data link is established from a global positioning satellite (GPS) **24** to the GPS positioning signal receiver **22** upon the receipt of the transmit request signal. A GPS positioning signal is received by the GPS positioning signal receiver **22** via the GPS data link. As one of ordinary skill in the art will appreciate, the locational data is derivable from the GPS positioning signal. Such locational data is then transmitted **42**, as described above. It is contemplated that the GPS locational data provides very precise information as

to the location of the vehicle **10**, and therefore facilitates the efficient determination **46** of the location and the confiscation **48** of the vehicle **10**.

In addition, the method of the present invention provides for a system operability verification procedure. A data link is established **34** from the base terminal to the transmitter at predetermined intervals prior to any occurrence of a default condition. The base terminal **20** originates and transmits **36** a transmit request signal which is received **38** by the base communication receiver **16**. In response, the transmitter **14** of the vehicle **10** transmits **42** locational data back to the base terminal **20**. The receipt of such locational data at the base terminal **20** successfully verifies the operation of the retrieval apparatus **12** including the transmitter **14** and the base communications receiver **16** therein. In addition, the received locational data may be stored for future use should reference to such data be desired. In operation, such a verification procedure could be followed monthly, for example. In the event that locational data is not received by the base terminal **20**, and therefore a failed verification occurs, the lending institution may follow-up in contacting the borrower, and correct any problems or defects in the retrieval apparatus **12**. Thus, such a verification procedure allows to the lending institution to increase its probability that the retrieval apparatus **12** will function as designed to facilitate the securing of the collateralized vehicle **10**.

The method of the present invention is preferably provided with a procedure of alerting the lending institution that the retrieval apparatus **12** has been physically tampered with. In this respect, the retrieval apparatus **12** and/or components thereof (e.g., transmitter **14**, base communication receiver **16**, GPS positioning signal receiver **22**, etc.) are configured to be capable of sensing any physical tampering therewith and transmitting a tamper signal in response to any sensed tampering. Thus, the data link is established **34** from the base terminal **20** to the transmitter **14** upon the sensing **54** of any physical tampering with the retrieval apparatus **12**. It is contemplated that the method of determining whether the retrieval apparatus **12** has been tampered with is chosen from those well known to one of ordinary skill in the art and may include electrical and electro-mechanical devices. Advantageously, it is contemplated that such a tampering alert procedure increases the probability that the retrieval apparatus **12** will function properly when desired because the lending institution may become aware of any such tampering prior to the loan entering into a default condition and the mere existence of the tampering alert procedure may deter acts of intentional damage to the retrieval apparatus.

While the retrieval apparatus **12** may be solely powered via the electrical system of the vehicle **10**, the retrieval apparatus **10** is preferably additionally powered with a rechargeable battery. In such a configuration, the rechargeable battery is electrically connected to a generator/alternator of the vehicle **10** and is recharged during operation of the vehicle **10**. Thus, the retrieval apparatus **12** may utilize the rechargeable battery as a back-up or alternate power supply. Advantageously, use of a rechargeable battery mitigates against unwanted and possibly intentional deactivation of the retrieval apparatus **12** where the vehicle battery is disconnected or the vehicle **10** is not in use.

In addition to the base communication receiver **16** being able to receive transmit request signals, a vehicle alarm signal may also be received. In this regard, the vehicle **10** may be provided with an audio and/or visual devices which are in electrical communication with the controller **18**. Such devices may be the vehicle's horn, lights, speakers, etc. The method of the present invention provides for the transmitting

of a vehicle alarm signal from the base terminal **20** to the base communication receiver **16** and receiving the vehicle alarm signal with the base communication receiver **16**. The vehicle alarm signal is then communicated to the controller **18** which electrically enables the vehicle alarm. Such an alarm enablement step is contemplated to facilitate the determination of the exact location of the vehicle **10** once vehicle repossession personnel are within personal sensory range of the vehicle alarm system. Thus, while the locational data which is used by vehicle repossession personnel may allow such personnel to be within the generally locality of the vehicle **10**, the sounding of the vehicle horn or illumination vehicle headlamps may further facilitate finding the vehicle **10**. This is especially the case where the vehicle **10** is hidden or concealed within a garage, for example.

The base communication receiver **16** may be further capable of receiving a deactivation signal from the base terminal **20** and the controller **18** may be in electrical communication with any number of devices which would facilitate deactivation of the vehicle **10**, such the vehicle ignition or fuel system. As such, it is contemplated that the base terminal **20** may transmit a deactivation signal to the base communication receiver **16** via the data link. Upon receipt of the deactivation signal with the base communication receiver **16**, the controller **18** may process such signal and initiate the deactivation of the vehicle **10**. It is contemplated that the method of deactivating the vehicle **10** via the initiation by the controller **18** is chosen from those well known to one of ordinary skill in the art.

Additional modifications and improvements of the present invention may also be apparent to those of ordinary skill in the art. Thus, the particular combination of parts described and illustrated herein is intended to represent only one embodiment of the present invention, and is not intended to serve as limitations of alternative devices within the spirit and scope of the invention.

What is claimed is:

1. A method of securing collateral for a loan when indicated by a loan status wherein the collateral comprises a vehicle, the method comprising the steps of:

- (a) installing a transmitter within the vehicle, the transmitter being capable of transmitting locational data regarding the vehicle;
- (b) monitoring the loan status for a default condition;
- (c) establishing a data link from a base terminal to the transmitter of the vehicle upon an occurrence of the default condition in the loan status;
- (d) transmitting locational data from the transmitter of the vehicle to the base terminal via the data link;
- (e) determining the location of the vehicle from the locational data transmitted to the base terminal; and
- (f) confiscating the vehicle.

2. The method of claim 1 wherein step (a) further comprises the step of:

- (1) installing a base communication receiver within the vehicle, the base communication receiver being capable of receiving a transmit request signal; and

step (c) further comprises the steps of:

- (1) establishing a data link from a base terminal to the base communication receiver upon an occurrence of the default condition in the loan status; and

(2) receiving a transmit request signal from the base terminal with the base communication receiver via the data link.

7

3. The method of claim 2 wherein step (c) further comprising the steps of:

- (1) establishing the data link from the base terminal to the base communication receiver at predetermined intervals prior to any occurrence of a default condition; and
- (2) transmitting locational data from the transmitter to the base terminal via the data link to verify the operation of the base communication receiver.

4. The method of claim 1 wherein step (c) further comprising the steps of:

- (1) establishing the data link from the base terminal to the transmitter at predetermined intervals prior to any occurrence of a default condition; and
- (2) transmitting locational data from the transmitter to the base terminal via the data link to verify the operation of the transmitter.

5. The method of claim 4 wherein step (c) further comprising the step of:

- (3) receiving the locational data at the base terminal and storing the locational data.

6. The method of claim 1 wherein step (b) further comprising the step of:

- (1) monitoring the loan status for a delinquent condition; and

step (c) further comprising the step of:

- (1) establishing a data link from a base terminal to the transmitter of the vehicle upon an occurrence of the delinquent condition in the loan status.

7. The method of claim 1 wherein the transmitter is capable of sensing any physical tampering therewith and transmitting a tamper signal in response to any sensed tampering, step (c) further comprises the step of:

- (1) establishing the data link from the base terminal to the transmitter upon the sensing of any physical tampering with the transmitter.

8. The method of claim 1 wherein step (a) further comprising the step of:

- (1) powering the transmitter with a rechargeable battery.

9. The method of claim 1 wherein the vehicle having an alarm, step (a) further comprises the step of:

8

(1) installing a base communication receiver within the vehicle, the base communication receiver being capable of receiving a vehicle alarm signal; and

step (d) further comprises the step of:

- (1) transmitting a vehicle alarm signal from the base terminal to the base communication receiver via the data link;
- (2) receiving the vehicle alarm signal with the base communication receiver; and
- (3) enabling the vehicle alarm.

10. The method of claim 1 wherein step (a) further comprises the step of:

(1) installing a base communication receiver within the vehicle, the base communication receiver being capable of receiving a vehicle deactivation signal; and

step (d) further comprises the step of:

- (1) transmitting a deactivation signal from the base terminal to the base communication receiver via the data link;
- (2) receiving the deactivation signal with the base communication receiver; and
- (3) deactivating the vehicle.

11. The method of claim 1 wherein step (a) further comprises the step of:

(1) installing a GPS positioning signal receiver;

step (c) further comprises the steps of:

- (1) establishing a data link from a global positioning satellite (GPS) to the GPS positioning signal receiver; and

(2) receiving a GPS positioning signal; and

wherein the transmitted locational data being based upon the received GPS positioning signal.

12. The method of claim 1 wherein the transmitter is a cellular phone.

13. The method of claim 1 wherein the base terminal is mobile.

14. The method of claim 13 wherein step (e) further comprising the step of:

- (1) moving the base terminal to determine the location of the vehicle.

15. The method of claim 1 wherein the installing of the transmitter is effectuated during the vehicle manufacturing process.

\* \* \* \* \*



US006025774C1

(12) **EX PARTE REEXAMINATION CERTIFICATE** (8350th)  
**United States Patent**  
**Forbes**

(10) **Number:** **US 6,025,774 C1**  
(45) **Certificate Issued:** **Jun. 28, 2011**

(54) **METHOD FOR RETRIEVING VEHICULAR COLLATERAL**

(75) Inventor: **Mark P. Forbes**, Mission Viejo, CA (US)

(73) Assignee: **Calamp Datacom, Inc.**, Oxnard, CA (US)

**Reexamination Request:**  
No. 90/010,660, Sep. 23, 2009

**Reexamination Certificate for:**  
Patent No.: **6,025,774**  
Issued: **Feb. 15, 2000**  
Appl. No.: **09/103,419**  
Filed: **Jun. 24, 1998**

(51) **Int. Cl.**  
**B60R 25/00** (2006.01)  
**G01S 5/14** (2006.01)

(52) **U.S. Cl.** ..... **340/426.19; 340/988; 235/384; 342/457; 701/213; 705/38**

(58) **Field of Classification Search** ..... **340/426**  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

- 3,580,353 A 5/1971 Thompson
- 4,398,172 A 8/1983 Carroll et al.
- 4,736,294 A 4/1988 Gill et al.
- 4,774,664 A 9/1988 Campbell et al.
- 4,887,004 A 12/1989 Kraaij et al.
- 4,891,650 A 1/1990 Sheffer
- 5,003,317 A 3/1991 Gray et al.
- 5,014,206 A 5/1991 Scribner et al.
- 5,032,845 A 7/1991 Velasco
- 5,119,504 A 6/1992 Durboraw, III
- 5,221,925 A 6/1993 Cross
- 5,223,844 A 6/1993 Mansell et al.
- 5,225,842 A 7/1993 Brown et al.
- 5,257,195 A 10/1993 Hirata
- 5,276,728 A 1/1994 Pagliaroli et al.
- 5,311,197 A 5/1994 Sorden et al.
- 5,323,152 A 6/1994 Morita

- 5,334,974 A 8/1994 Simms et al.
- 5,365,451 A 11/1994 Wang et al.
- 5,389,934 A 2/1995 Kass
- 5,398,190 A 3/1995 Wortham
- 5,408,211 A 4/1995 Hall
- 5,414,432 A 5/1995 Penny, Jr. et al.
- 5,418,537 A 5/1995 Bird
- 5,490,200 A 2/1996 Snyder et al.
- 5,515,043 A 5/1996 Berard et al.
- 5,587,715 A 12/1996 Lewis
- 5,588,038 A 12/1996 Snyder
- 5,596,313 A 1/1997 Berglund et al.

(Continued)

**FOREIGN PATENT DOCUMENTS**

- |    |            |         |
|----|------------|---------|
| EP | 0242099    | 10/1987 |
| GB | 2279478    | 1/1995  |
| WO | WO95/13943 | 5/1995  |
| WO | WO95/17686 | 6/1995  |

(Continued)

**OTHER PUBLICATIONS**


Elite Logistics Inc—ELOG Quarterly Report of Financial Condition; Form 10QSB, Item 2 Management's Discussion and Analysis of Financial Condition and Results of Operations, printed Jan. 25, 2008 [http://sec.edgar-online.com/2001/04/11/0000950134-01-003308/Section\\_8, 9](http://sec.edgar-online.com/2001/04/11/0000950134-01-003308/Section_8,9) pages.

(Continued)

*Primary Examiner*—Sam Rimell

(57) **ABSTRACT**

In accordance with the present invention, there is provided a method of securing collateral for a loan when indicated by a loan status wherein the collateral is a vehicle. The method provides for installing a transmitter within the vehicle. The transmitter is capable of transmitting locational data regarding the vehicle. The loan status is monitored for a default condition. A data link is established from a base terminal to the transmitter of the vehicle upon an occurrence of the default condition in the loan status. Locational data is transmitted from the transmitter of the vehicle to the base terminal via the data link. The location of the vehicle is determined from the locational data transmitted to the base terminal. Finally, the vehicle is confiscated.

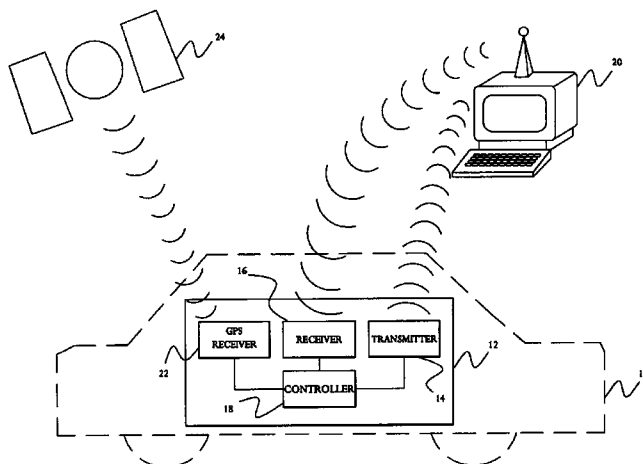



## U.S. PATENT DOCUMENTS

5,719,551	A	2/1998	Flick
5,742,509	A	4/1998	Goldberg et al.
5,751,246	A	5/1998	Hertel
5,777,580	A	7/1998	Janky et al.
5,797,091	A	8/1998	Clise et al.
5,797,134	A	8/1998	McMillan et al.
5,808,564	A	9/1998	Simms et al.
5,825,283	A	10/1998	Camhi
5,883,594	A	3/1999	Lau
5,898,391	A	4/1999	Jefferies et al.
5,917,405	A	6/1999	Joao
5,918,180	A	6/1999	Dimino
5,918,183	A	6/1999	Janky et al.
5,939,975	A	8/1999	Tsuria et al.
5,999,125	A	12/1999	Kurby
6,069,570	A	5/2000	Herring
6,072,396	A	6/2000	Gaukel
6,084,870	A	7/2000	Wooten et al.
6,094,164	A	7/2000	Murphy
6,121,922	A	9/2000	Mohan
6,131,067	A	10/2000	Girerd et al.
6,240,365	B1	5/2001	Bunn
6,278,936	B1	8/2001	Jones
6,531,982	B1	3/2003	White et al.
6,618,668	B1	9/2003	Laird
6,657,857	B2	12/2003	Lan
6,714,859	B2	3/2004	Jones
6,741,927	B2	5/2004	Jones
6,804,606	B2	10/2004	Jones
6,812,829	B1	11/2004	Flick
6,904,359	B2	6/2005	Jones
6,952,645	B1	10/2005	Jones
7,030,781	B2	4/2006	Jones
7,031,826	B2	4/2006	Flick
7,191,058	B2	3/2007	Laird et al.

## OTHER PUBLICATIONS

About Teletrac, printed Jan. 25, 2008, from <http://www.teletrac.net/about>, 2 pgs.

Teletrac—Vehicle Tracking Solutions, Stolen Vehicle Recovery and Mobile Information System, printed Jan. 25, 2008 from <http://www.teletrac.net/teletrac>, 3 pgs.

Motorola to unveil CreaLink pager and car-finder, printed Jan. 25, 2008 from [http://chronicle.augusta.com/stories/121197/tech\\_carpager.s](http://chronicle.augusta.com/stories/121197/tech_carpager.s), 2 pgs.

Motorola's CreaLink 2 XT Two—W . . . , printed Jan. 25, 2008 from [http://findarticles.com/p/articles/mi\\_m0BFP/is\\_1999\\_Sept\\_13/ai\\_55747](http://findarticles.com/p/articles/mi_m0BFP/is_1999_Sept_13/ai_55747), 6 pgs.

How OnStar Works, printed Jan. 9, 2008 from <http://auto.howstuffworkds.com/onstar1.1>, 4 pgs.

How OnStar Works, Statistics, printed Jan. 9, 2008 from <http://auto.howstuffworks.com/onstar2>, 5 pgs.

OnStar: 10 years after, printed Jan. 9, 2008 from [http://findarticles.com/p/articles/mi\\_m0KJI/is\\_2\\_118/ai\\_n1608](http://findarticles.com/p/articles/mi_m0KJI/is_2_118/ai_n1608). 6 pgs.

The Global Positioning System: A Shared National Asset, GPS Applications and Requirements, printed Jan. 7, 2008 from [http://www.nap.edu/openbook.php?record\\_id=4920&page](http://www.nap.edu/openbook.php?record_id=4920&page), 11 pgs.

Rappaport et al., "Position Location Using Wireless Communications on Highways of the Future", IEEE Communications Magazine, Oct. 1996, pp. 33–41.

"Passtec/Passtime Eliminate Delinquencies", printed Jan. 23, 2008 from [http://www.dealermark.com/index/php?option=com\\_content&task=view&id=311&itemi](http://www.dealermark.com/index/php?option=com_content&task=view&id=311&itemi), 4 pgs.

Green; "Car sellers turn to technology to secure payment, Bad-risk buyers get second chance", Oct. 2002, printed from [http://www.promptpay.co.uk/se\\_union-news...](http://www.promptpay.co.uk/se_union-news...), 3 pgs.

Knight Ridder News, "Devices can halt cars with tardy payments", Oct. 5, 2005, printed from [http://www.billings-gazette.com/newdex-php/newdex.php?display=rednews/2005/10/04\\_build/business](http://www.billings-gazette.com/newdex-php/newdex.php?display=rednews/2005/10/04_build/business), 3 pgs.

Mysan.de Lifestyle News, If You Don't Pay On Time You Can't Start Your Car, printed Jan. 22, 2008 from <http://www.sekurusontime.com/DNNImages/mysan>, 2 pgs.

Munoz, "Late-pay penalty: You walk", Orange County Register, Nov. 21, 2002, printed from <http://www.sekurusontime.com/DNNImages/register>, 3 pgs.

Barlas, "For Avid Drivers, It's Light, Gears, Action"; Investor's Business Daily, printed Jan. 22, 2008 from <http://www.sekurusontime.com/DNNImages/investor>, 1 pg.

Inc., The Magazine for Growing Companies, "Technology For Your Own Good Innovation", printed Jan. 22, 2008 from <http://www.sekurusontime.com/DNNImages/inc.>, 1 pg.

Box, "No credit? No problem", The Dallas Morning News, Dec. 19, 2005, printed from [http://sekurusontime.com/DNNImages/union\\_2](http://sekurusontime.com/DNNImages/union_2), 5 pgs.

Goforth et al., "Device remind car owner when payment due disables vehicle if it's missed", Akron Beacon Journal, printed Jan. 22, 2008 from <http://www.sekurusontime.com/DNNImages/beackcon>, 3 pgs.

St. Petersburg Times, "Late with a payment? No wonder car won't start", Jul. 23, 2005, printed from <http://www.sekurusontime.com/DNNImages/stpters>, 2 pgs.

Mecoy, "Device Keeps Device on Credit Highway", The Oklahoman, Jun. 22, 2005, printed from <http://www.sekurusontime.com/DNNImages/oklahoman>, 2 pgs.

On Time Customer Testimonials, printed Jan. 22, 2008 from <http://www.sekurusontime.com/media/testimonials/tabid/64/default>, 2 pgs.

Zacccone, News, Views & Analysis Blogs by Allison Zacccone, printed Jan. 22, 2008 from <http://www.ai-online.com/Adv/questionnaire/view.php?id=172&search>, 3 pgs.

Kumler, "Dealers put halt to free rides", Oct. 25, 2004, [reviewjournal.com](http://www.reviewjournal.com/Ivrj_home/20004/Oct-25-Mon/business/25043467.1), printed from [http://www.reviewjournal.com/Ivrj\\_home/20004/Oct-25-Mon/business/25043467.1](http://www.reviewjournal.com/Ivrj_home/20004/Oct-25-Mon/business/25043467.1), 4 pgs.

Kimberlin, "Can't make your car payment? They you can't get it started", The Virginian-Pilot, Nov. 28, 2005, printed from <http://www.payteck.cc.news>, 21 pgs.

Sekurus Inc., Executive Team, printed Jan. 22, 2008 from <http://www.sekurus.com/executiveteam/tabid/137/default>, 3 pgs.

Statewide Auto Broker Q&A, May 17, 2002, 1 pg.

Illinois Title Lenders Q&A, Aug. 8, 2002, 1 pg.

PacTel Teletrac, Transceiver Installation Guide, May 20, 1993, 31 pgs.

Motorola Introduces Wireless Automobile Solution for Controlling In-Vehicle Function, printed Feb. 20, 2008 from [http://findarticles.com/p/articles/mi\\_m0EIN/is\\_1997\\_Dec\\_10/ai\\_2005](http://findarticles.com/p/articles/mi_m0EIN/is_1997_Dec_10/ai_2005), 9 pgs.

Eldredge, "Locked your keys in the car? Lost your car at the mall?", USA Today, Dec. 10, 1997, 1 pg.

Elite Logistics Inc. Completes Page Track Distribution Agreement with Motorola Inc., printed Jan. 25, 2008 from [http://findarticles.com/p/articles/mi\\_m0EIN/is\\_2001\\_Jan\\_16/ao\\_69025](http://findarticles.com/p/articles/mi_m0EIN/is_2001_Jan_16/ao_69025), 3 pgs.

Juliano et al., "Wireless Data Communications Prototyping: A Flexible, High-Quality, and Cost Effective Information System for Education", 1995, 1995 ASCUE Proceedings, 12 pgs.

Juliano et al. "Managing School Buses on the Information Highway", Coastal Business Review, Dec. 1995, 9 pgs.

Juliano et al., "The Design, Analysis and Implementation of System Interfaces that Integrate the Magellen AIV-10 Global Positioning System Module and the Motorola ROM

4051 Radio Packet Model", Bulletin of the South Carolina Academy of Science, 1995, vol. LV, 3 pgs.

Wahab et al., "A Low-Cost Yet Accurate Approach to a Vehicle Location Tracking System", International Conference on Information, Communications and Signal Processing, Sep. 9, 1997, p. 461-465.

Tan et al., "GPS Decoder", IEEE, 1997, pp. 242-245.

Declaration of Gallin Chen, 8 pgs.

Affidavit of James Bass, 1 pg.

Affidavit of William C. Kennedy, 2 pgs.

Affidavit of Kenneth Westerlage, 2 pgs.

1

**EX PARTE  
REEXAMINATION CERTIFICATE  
ISSUED UNDER 35 U.S.C. 307**

THE PATENT IS HEREBY AMENDED AS  
INDICATED BELOW.

**Matter enclosed in heavy brackets [ ] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.**

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

Claim 1 and 11 are determined to be patentable as amended.

Claims 2-10 and 12-15, dependent on an amended claim, are determined to be patentable.

New claims 16-24 are added and determined to be patentable.

1. A method of securing collateral for a loan when indicated by a loan status wherein the collateral comprises a vehicle, the method comprising the steps of:

- (a) installing a transmitter within the vehicle, the transmitter being capable of transmitting locational data regarding the vehicle;
- (b) monitoring the loan status for a default condition;
- (c) establishing a data link from a base terminal to the transmitter of the vehicle upon an occurrence of the default condition in the loan status;
- (d) transmitting locational data from the transmitter of the vehicle to the base terminal via the data link;
- (e) determining the location of the vehicle from the locational data transmitted to the base terminal; and
- (f) confiscating the vehicle;

wherein step (a) further comprises the step of:

*(1) installing a GPS positioning signal receiver; and*

wherein step (c) further comprises the step of:

*(1) receiving a GPS positioning signal; and*

wherein the transmitted locational data being based upon the received GPS positioning signal.

11. The method of claim 1 wherein [step (a) further comprises the step of:

2

(1) installing a GPS positioning signal receiver;] step (c) further comprises the steps of;

(1) establishing a data link from a global positioning satellite (GPS) to the GPS positioning signal receiver; and

(2) receiving a GPS positioning signal; and wherein the transmitted locational data being based upon the received GPS positioning signal].

16. *The method of claim 1, wherein the loan status is contained on a computer network.*

17. *The method of claim 16, wherein the base terminal is in electrical communication with the computer network.*

18. *The method of claim 2, wherein the transmitter capable of transmitting locational data regarding the vehicle, the base communication receiver, and the GPS positioning signal receiver are included within a retrieval apparatus that further comprises a controller electrically connected to the transmitter and the base communication receiver.*

19. *The method of claim 9, wherein the transmitter capable of transmitting locational data regarding the vehicle, the base communication receiver, and the GPS positioning signal receiver are included within a retrieval apparatus that further comprises a controller electrically connected to the transmitter and the base communication receiver.*

20. *The method of claim 19, wherein:*

*the controller is in electrical communication with an audio device; and*

*enabling the vehicle alarm comprises the base communication receiver communicating the vehicle alarm signal to the controller which electrically enables the audio device.*

21. *The method of claim 20, wherein the audio device is a vehicle horn.*

22. *The method of claim 22, wherein the audio device is a speaker.*

23. *The method of claim 18, wherein:*

*the controller is in electrical communication with a visual device; and*

*enabling the vehicle alarm comprises the base communication receiver communicating the vehicle alarm signal to the controller which electrically enables the visual device.*

24. *The method of claim 23, wherein the visual device is a light.*

\* \* \* \* \*