



US 20100007805A1

(19) **United States**
(12) **Patent Application Publication**
Vitito

(10) **Pub. No.: US 2010/0007805 A1**
(43) **Pub. Date: Jan. 14, 2010**

(54) **INDUCTIVELY POWERED MOBILE ENTERTAINMENT SYSTEM**

Publication Classification

(76) Inventor: **Christopher J. Vitito**, Celebration, FL (US)

(51) **Int. Cl.** *H04N 5/64* (2006.01)
(52) **U.S. Cl.** **348/837; 348/E05.128**


Correspondence Address:
WELSH & FLAXMAN LLC
2000 DUKE STREET, SUITE 100
ALEXANDRIA, VA 22314 (US)

(57) **ABSTRACT**

A mobile entertainment system includes a video system designed for reducing energy consumption. The video system includes a battery permitting proximity charging of the video system. A supporting structure supports the video system within a vehicle.

(21) Appl. No.: **12/216,852**

(22) Filed: **Jul. 11, 2008**

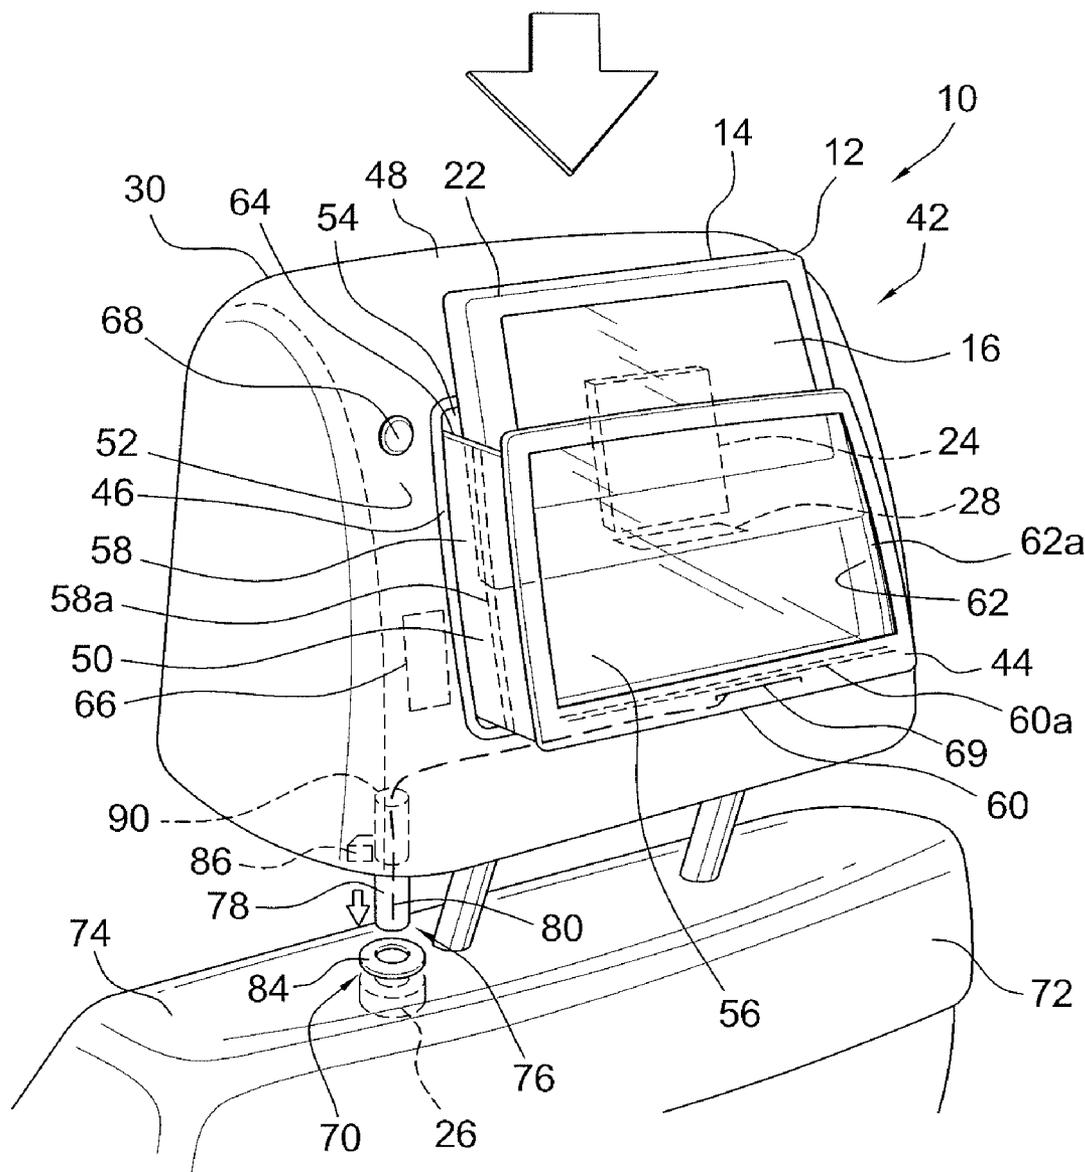

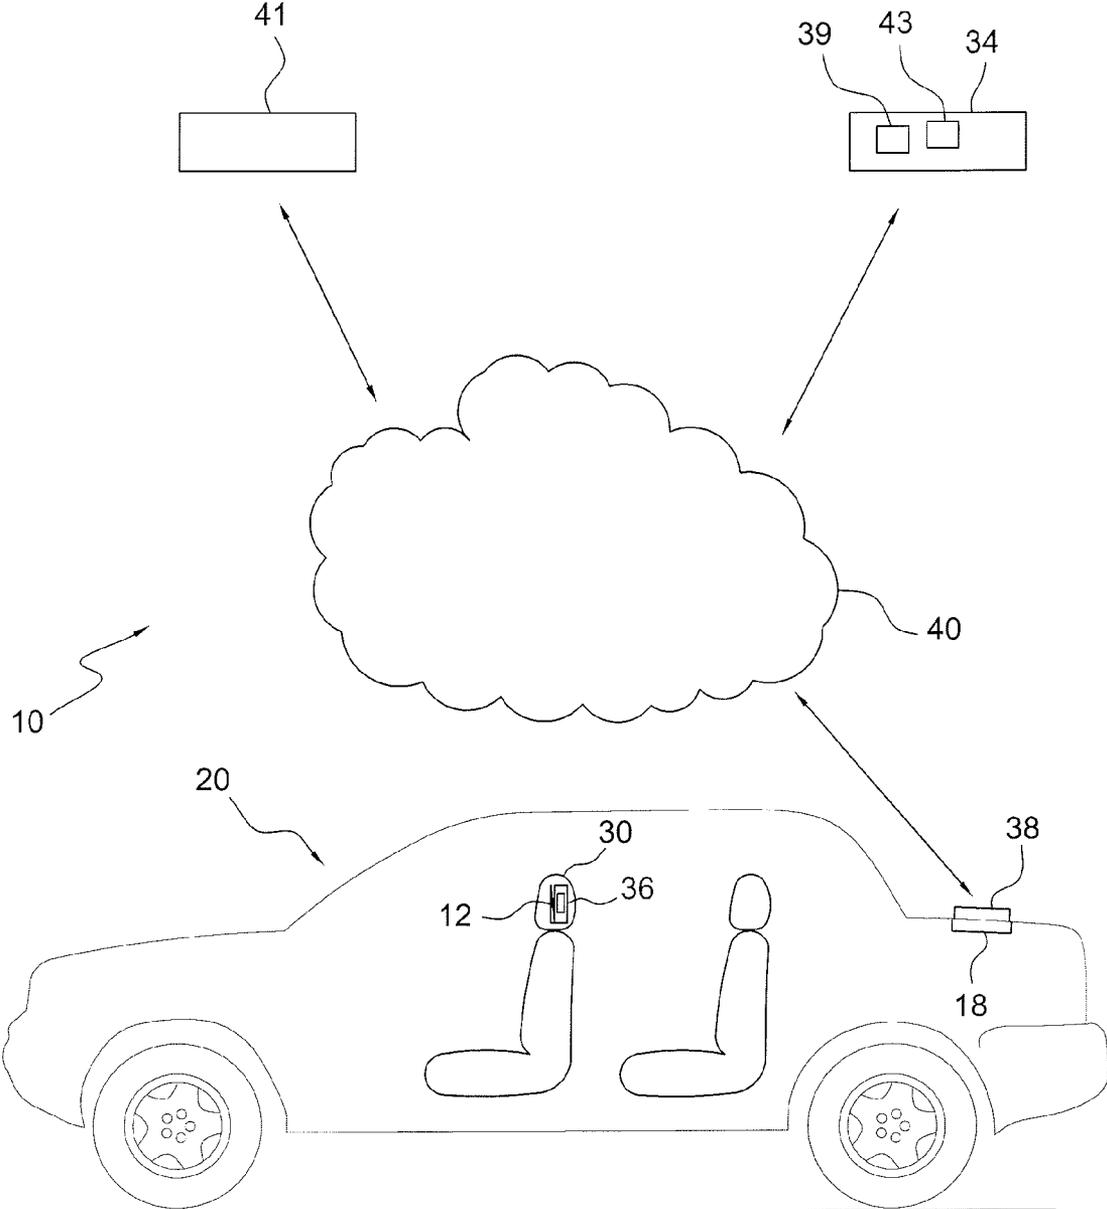


FIG. 1

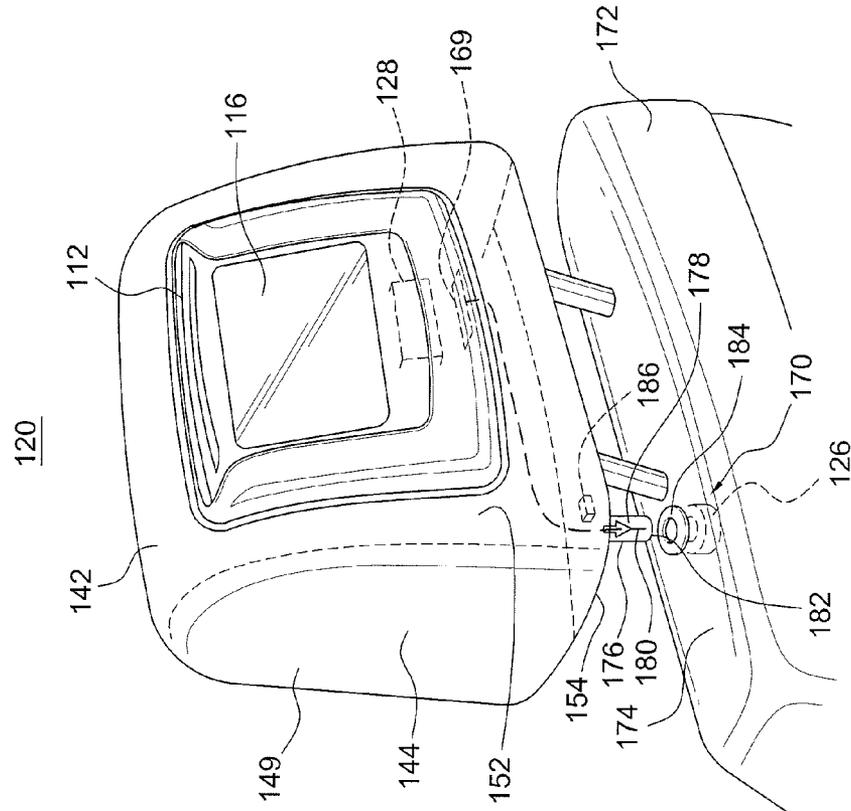


FIG. 5

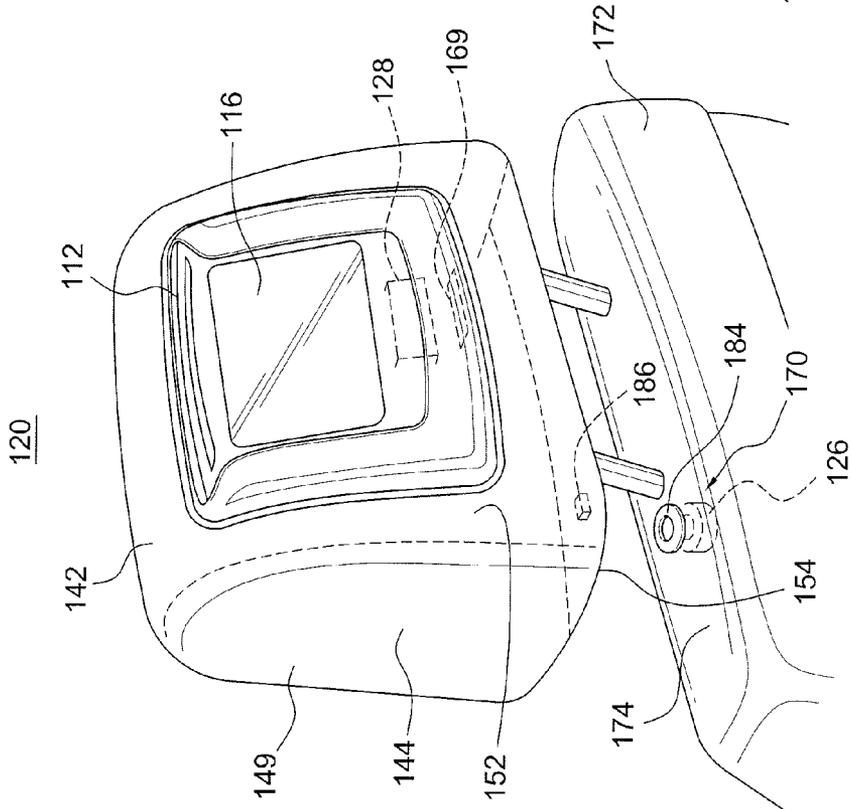


FIG. 6

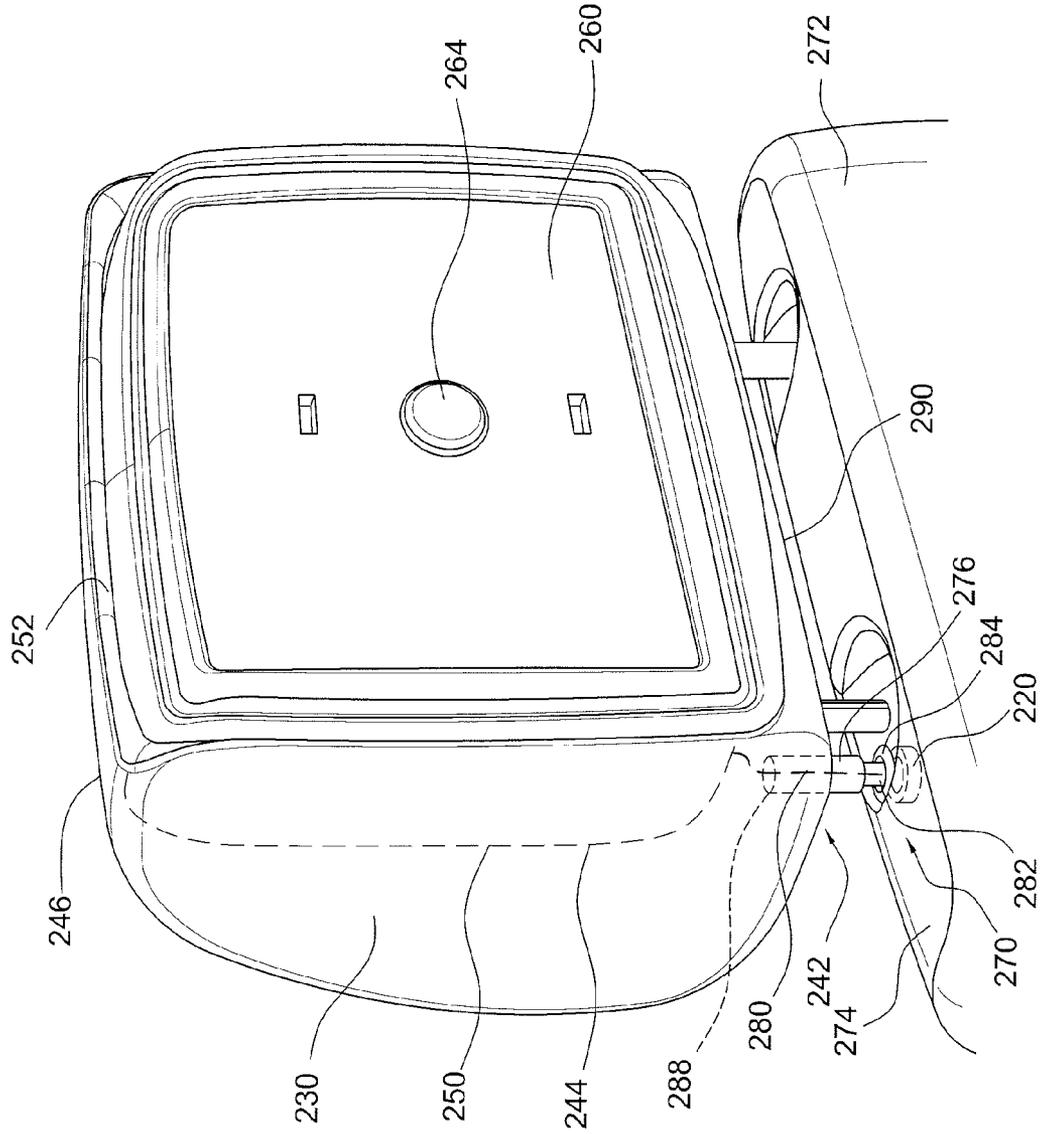


FIG. 7

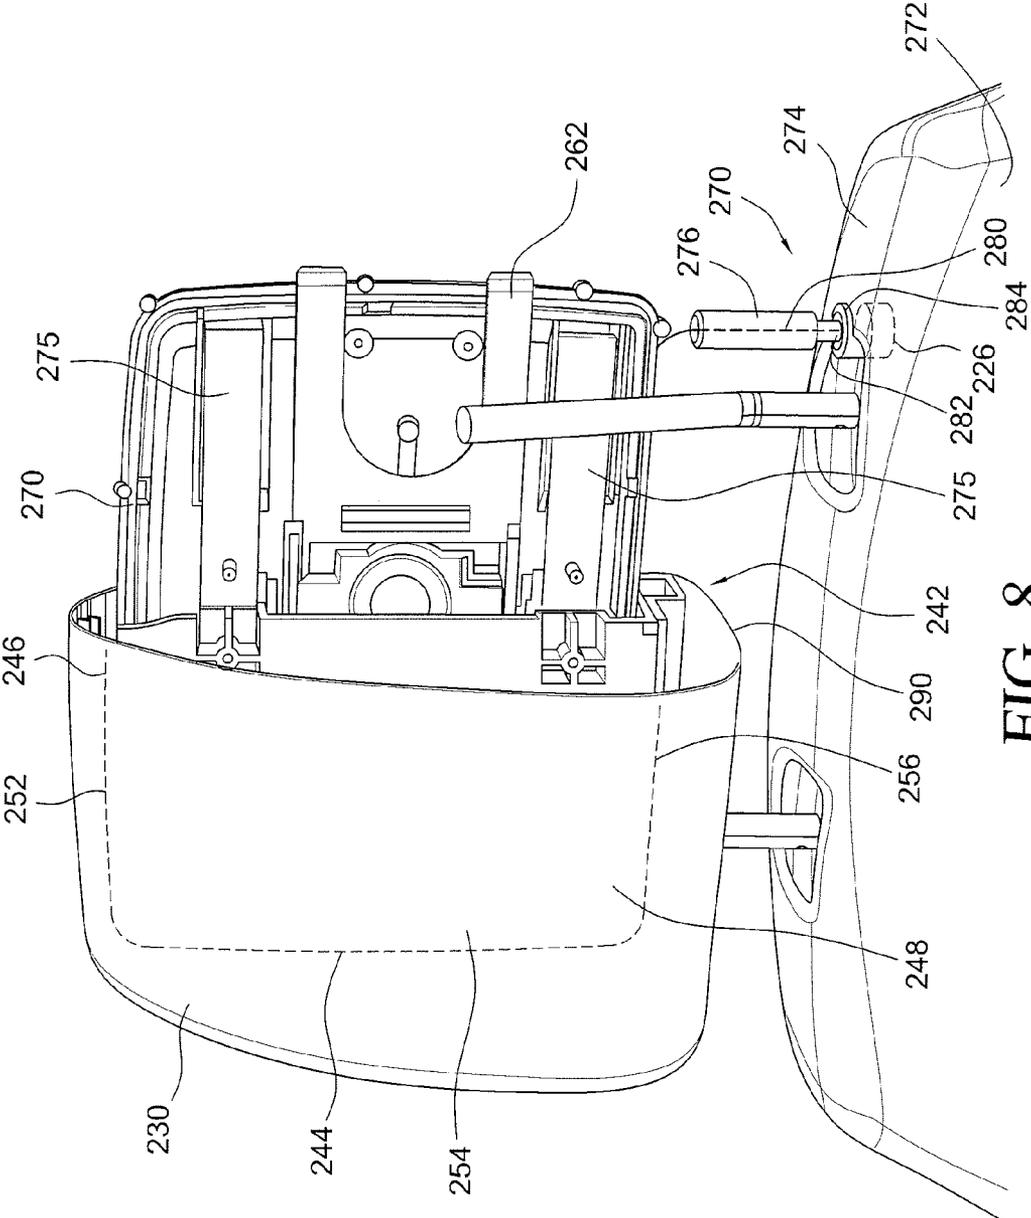
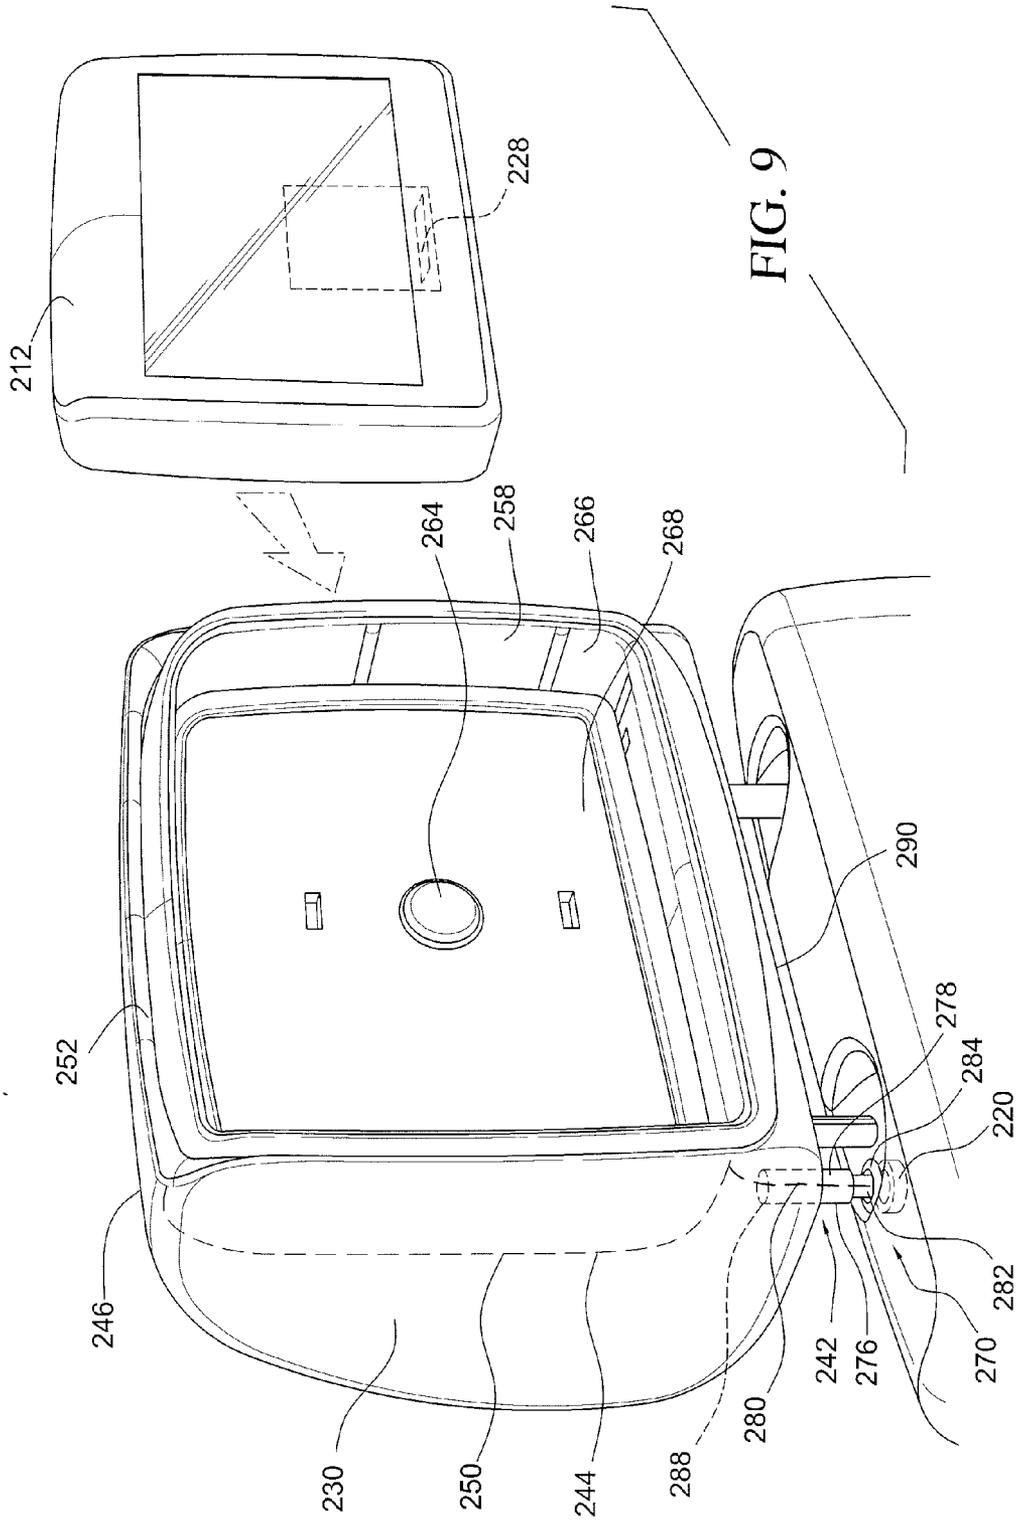


FIG. 8



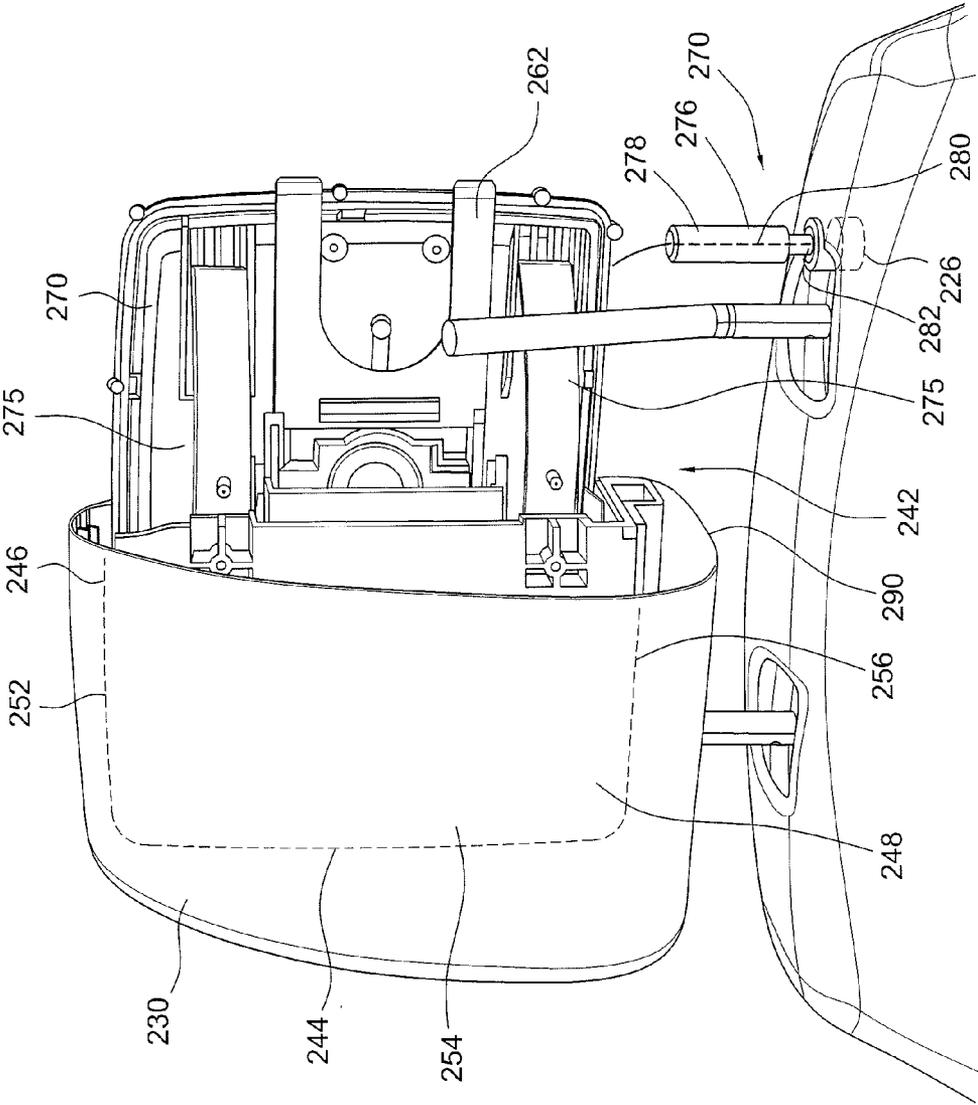


FIG. 10

INDUCTIVELY POWERED MOBILE ENTERTAINMENT SYSTEM

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The invention relates to a mobile entertainment system. More particularly, the invention relates to an energy efficient mobile entertainment system free from the requirement of a direct line based energy connection to an automobile.

[0003] 2. Description of the Prior Art

[0004] Entertainment systems for automobiles are well known. As such, many advances have been made in the development of entertainment systems that make the otherwise tedious task of riding in an automobile more bearable. In addition to the development of overhead systems pioneered by the present inventor, systems that mount at various locations within an automobile have also been developed.

[0005] These entertainment systems allow multiple individuals to view a variety of different video sources within the same vehicle. However, and as those skilled in the art will certainly appreciate, it is desirable to provide added versatility to these entertainment systems. The present invention attempts to accomplish this by providing a system that is energy efficient and does not require a direct line based energy connection to an automobile.

SUMMARY OF THE INVENTION

[0006] It is, therefore, an object of the present invention to provide a mobile entertainment system including a video system designed for reducing energy consumption. The video system includes a battery permitting proximity charging of the video system. A supporting structure supports the video system within a vehicle.

[0007] It is also an object of the present invention to provide a mobile entertainment system wherein the power consumption of the video system is less than approximately 2 Amps.

[0008] It is another object of the present invention to provide a mobile entertainment system wherein power consumption of the video system is less than approximately 0.5 Amps.

[0009] It is a further object of the present invention to provide a mobile entertainment system wherein the video system includes a housing in which a monitor is mounted for viewing by those utilizing the mobile entertainment system, and media content for display upon the monitor is wirelessly transmitted to the video system via a media storage unit mounted within the vehicle.

[0010] It is also an object of the present invention to provide a mobile entertainment system wherein the video system is provided with touch screen functionality.

[0011] It is another object of the present invention to provide a mobile entertainment system wherein a secondary coil is electrically linked to the battery of the video system for inductive coupling with a primary coil coupled to a power supply circuit of the vehicle.

[0012] It is a further object of the present invention to provide a mobile entertainment system wherein a telescoping coupling member electrically links the secondary coil of the video system with the primary coil.

[0013] It is also an object of the present invention to provide a mobile entertainment system wherein the telescoping coupling member is composed of a selectively telescoping arm

through which an electrical wire extends for linking a distal end of the telescoping arm to the secondary coil of the video system.

[0014] It is another object of the present invention to provide a mobile entertainment system wherein the distal end of the telescoping arm is magnetically charged for attraction to a magnetically charged shroud mounted within the vehicle and linked to the primary coil.

[0015] It is a further object of the present invention to provide a mobile entertainment system wherein the primary coil is mounted in the seat back of the vehicle in proximity to the secondary coil.

[0016] It is another object of the present invention to provide a mobile entertainment system wherein the video system is mounted within a headrest of the vehicle.

[0017] It is a further object of the present invention to provide a mobile entertainment system wherein the video system includes a housing in which a monitor is mounted for viewing by those utilizing the mobile entertainment system, and the monitor is an organic LED.

[0018] It is also an object of the present invention to provide a mobile entertainment system wherein the supporting structure allows for selective supporting of the video system within the vehicle.

[0019] It is a further object of the present invention to provide a mobile entertainment system wherein the supporting structure is composed of a drawer integrally formed within the vehicle.

[0020] It is also an object of the present invention to provide a mobile entertainment system wherein the drawer is integrally formed within a headrest of the vehicle.

[0021] It is another object of the present invention to provide a mobile entertainment system wherein the drawer includes a transparent front wall.

[0022] It is a further object of the present invention to provide a mobile entertainment system wherein the drawer includes a base support and a drawer member, and movement of the drawer member relative to the base support is controlled by a servomotor that selectively moves the drawer member between its closed position and its open position.

[0023] It is also an object of the present invention to provide a mobile entertainment system wherein the supporting structure is a slipcover shaped and dimensioned to fit over a headrest.

[0024] It is another object of the present invention to provide a mobile entertainment system wherein the slipcover is composed of fabric base structure shaped and dimensioned to fit over the headrest, and includes a zipper allowing for expansion and closure to allow the fabric base structure to fit over the headrest.

[0025] It is a further object of the present invention to provide a mobile entertainment system wherein the supporting structure is a recessed support structure into which the video system is snap fit.

[0026] It is also an object of the present invention to provide a mobile entertainment system wherein the recessed support structure includes a base support that is fit within a recess formed in a headrest, and a false front wall is supported within the recessed support structure for movement from a recessed position adjacent a closed base wall of the recessed support structure and an exposed position covering an open top of the recessed support structure.

[0027] Other objects and advantages of the present invention will become apparent from the following detailed

description when viewed in conjunction with the accompanying drawings, which set forth certain embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] FIG. 1 is a schematic of the present mobile entertainment system.

[0029] FIGS. 2 and 3 are perspective views of a first embodiment in accordance with the present invention.

[0030] FIGS. 4, 5 and 6 are respectively an exploded view, a perspective view with the inductive charging system retracted and a perspective view with the inductive charging system extended in accordance with yet another embodiment in accordance with the present invention.

[0031] FIGS. 7, 8, 9 and 10 are respectively a perspective view and a partial cross sectional view thereof, and a perspective view and a partial cross sectional view thereof showing another embodiment in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0032] The detailed embodiments of the present invention are disclosed herein. It should be understood, however, that the disclosed embodiments are merely exemplary of the invention, which may be embodied in various forms. Therefore, the details disclosed herein are not to be interpreted as limiting, but merely as the basis for the claims and as a basis for teaching one skilled in the art how to make and/or use the invention.

[0033] With reference to FIG. 1, a mobile entertainment system 10 for use in automobiles is disclosed. Although the present mobile entertainment system 10 is particularly adapted and disclosed herein for use in conjunction with automobiles 20, the present entertainment system 10 may be utilized in conjunction with a wide variety of vehicles, for example, but not limited to, boats, aircrafts, etc., without departing from the spirit of the present invention.

[0034] The centerpiece of the present mobile entertainment system 10 is a video system 12 designed for reducing energy consumption. The reduced energy consumption of the present mobile entertainment system 10 allows for implementation thereof without the need for a direct wired connection to the power system of an automobile. In accordance with a preferred embodiment of the present invention, the power consumption of the video system is preferably less than approximately 2 Amps, more preferably less than approximately 1.5 Amps, and even more preferably less than approximately 0.5 Amps.

[0035] The video system 12 generally includes a housing 14 in which a monitor 16 is mounted for viewing by those utilizing the present mobile entertainment system 10. Media content for display upon the monitor 16 is wirelessly transmitted to the video system 12 via a media storage unit 18 mounted within the automobile 20, and discussed below in greater detail. As for the audio content, it is also wirelessly transmitted to the video system 12 for transmission to the user via speakers 22 built into the housing 14 of the video system 12 or via wired/wireless headphones linked to the video system 12. In addition, it is contemplated the audio content may be transmitted to the automobile speakers. Such an arrangement could be employed by directly wiring the media storage unit 18 to the automobile audio system or wirelessly linking

the media storage unit 18 to the automobile audio system. As such, the video system 12 is provided with a wireless connection member, for example, a WiFi adapter allowing for transmission of media content between the media storage unit 18 and the video system 12.

[0036] The video system 12 is also provided with electronic components necessary for processing the media content retrieved from the media storage unit 18 for display upon the monitor 16 and play through the speakers/headphones. The video system 12 is also preferably provided with touch screen functionality allowing for ease of use without the need for additional buttons and control mechanisms. A battery 24 is provided for powering the present video system 12. As will be appreciated based upon the following disclosure, the battery 24 is designed for continual recharging via proximity charging, or inductive coupling or charging of the video system 12, in particular, the battery 24 of the video system 12 which ultimately powers the video system 12. In electronics, inductive coupling refers to the transfer of energy from one circuit component to another through a shared magnetic field. A change in current flow through one device induces current flow in the other device. The two devices may be physically contained in a single unit, as in the primary and secondary sides of a transformer, or may be separated as in the antennas on a transmitter and a receiver. Inductive coupling favors low frequency energy sources. High frequency energy sources generally use capacitive coupling.

[0037] In particular, and in accordance with a preferred embodiment of the present invention, a system such as that disclosed in U.S. Pat. No. 7,118,240, which is incorporated herein by reference, is employed. In accordance with a preferred embodiment of the present invention, power is wirelessly transferred from a primary coil (or simply "primary") 26, which is powered by the electrical system of the automobile 20 to a secondary coil (or simply "secondary") 28 in a secondary circuit housed in and electrically linked to the battery 24 of the video system 12.

[0038] In accordance with the application of inductive coupling to the present mobile entertainment system 10, the primary coil 26 of the power supply circuit is supported within a structural element of the automobile 20, for example, within an upper edge 72 of a seat back 70 in a position adjacent to the headrest 30 in which the video system is mounted, as discussed below in accordance with preferred embodiments of the present invention. The secondary coil 28 of the secondary circuit is mounted within the video system 12 and is electrically coupled with the battery 24 and other operating components of the video system 12 to provide the power necessary for operating the video system 12 in accordance with the present invention. In addition to facilitating ease of installation and use, the wireless connection provides a number of advantages over conventional hardwired connections. The wireless connection reduces the chance of shock and provides a relatively high level of electrical isolation between the power supply circuit and the secondary circuit of the video system 12. Inductive coupling also makes it easier for a consumer to replace limited-life components.

[0039] Implementation of the present mobile entertainment system through the utilization of proximity charging necessitates that energy consumption of the video system 12 be held to a minimum so the battery 24, in conjunction with its ability to allow for proximity charging, will be sufficient to provide for powering of the video system 12 in a manner permitting usage thereof as desired by passengers of the auto-

mobile **20** in which the present mobile entertainment system **10** is incorporated. With this in mind, the monitor **16** is preferably an organic LED. As those skilled in the art will appreciate, an organic light-emitting diode (OLED), also Light Emitting Polymer (LEP) and Organic Electro-Luminescence (OEL), is any light-emitting diode (LED) whose emissive electroluminescent layer is composed of a film of organic compounds. The layer usually contains a polymer substance that allows suitable organic compounds to be deposited. They are deposited in rows and columns onto a flat carrier by a simple "printing" process. The resulting matrix of pixels can emit light of different colors.

[0040] OLED displays do not require a backlight to function and consequently draw far less power and, when powered from a battery, can operate longer on the same charge. Because there is no need to distribute the backlight, the OLED monitor utilized in accordance with a preferred embodiment of the present invention can also be much thinner than traditional LCD panels.

[0041] Briefly, the OLED monitor **16** is composed of an emissive layer, a conductive layer, a substrate, and anode and cathode terminals. The layers are made of special organic polymer molecules that conduct electricity. Their levels of conductivity range from those of insulators to those of conductors, and so they are called organic semiconductors.

[0042] A voltage is applied across the OLED monitor **16** such that the anode is positive with respect to the cathode. This causes a current of electrons to flow through the OLED monitor from cathode to anode. Thus, the cathode gives electrons to the emissive layer and the anode withdraws electrons from the conductive layer; in other words, the anode gives electron holes to the conductive layer.

[0043] Soon, the emissive layer becomes negatively charged, while the conductive layer becomes rich in positively charged holes. Electrostatic forces bring the electrons and the holes towards each other and recombine. This happens closer to the emissive layer, because in organic semiconductors holes are more mobile than electrons (unlike in inorganic semiconductors). The recombination causes a drop in the energy levels of electrons, accompanied by an emission of radiation whose frequency is in the visible region. That is why this layer is called emissive.

[0044] Indium tin oxide is commonly used as the anode material. It is transparent to visible light and has a high work function which promotes injection of holes into the polymer layer. Metals such as aluminium and calcium are often used for the cathode as they have low work functions which promote injection of electrons into the polymer layer.

[0045] Just like passive-matrix LCD versus active-matrix LCD, OLED can be categorized into passive-matrix OLED and active-matrix OLED. Active-matrix OLED requires a TFT backplane to switch ON/OFF the pixel and can make higher resolution and larger size display happen.

[0046] OLEDs enable a greater range of colors, brightness, and viewing angle than LCDs, because OLED pixels directly emit light. OLED pixel colors appear correct and unshifted, even as the viewing angle approaches 90 degrees from normal. LCDs use a backlight and cannot show true black, while an "off" OLED element produces no light and consumes no power. Energy is also wasted in LCDs because they require polarizers which filter out about half of the light emitted by the backlight. Additionally, color filters in color LCDs filter out two-thirds of the light. OLEDs also have a faster response time than standard LCD screens. Whereas a standard LCD

currently has an average of 8-12 millisecond response time, an OLED can have less than 0.01 millisecond response time.

[0047] As discussed above, the media content for display upon the video system is not actually stored upon the video system **12** itself, but is rather stored within the media storage unit **18** and transmitted to the video system **12** via wireless transmission protocols known to those skilled in the art. For example, and referring to the various figures, the present mobile entertainment system **10** permits retrieval of audio and video media content from a remote library **34**. Implementation of a preferred embodiment requires that the video system **12** include a media source **36**. The media source **36** is housed within the housing **14** of the video system **12**. The media source **36** includes data processing capabilities allowing for the streaming of media content for display upon the video system **12** as desired by a user.

[0048] A wireless global communication network access point **38** is mounted within the automobile **20** and is preferably integrated with the media storage unit **18**. The media source **36** includes wireless communication capabilities permitting communication with the wireless global communication network access point **38** and media storage unit **18** for retrieval of video and audio content for display upon the video monitor **16** and speakers/headphones of the video system **12**.

[0049] A remote library **34** of audio and video media content is in wireless communication with the media storage unit **18** (and ultimately the media source **36**) via the network access point **38**. The remote library **34** includes storage space **39** for uploading of media content from a personal collection of audio and video media content **41** stored, for example, on a home computer linked to the remote library **34** via the Internet. The uploaded personal collection of audio and video media content **41** from a user for subsequent transmission to the media storage unit **18** upon synchronization of the remote library **34** with the media storage unit **18** thereby provides the user with access to a personal collection of audio and video media content **41**. An access approval code is associated with the media storage unit **18** instructing the remote library **34** to synchronize the personal collection of audio and video media content **41** with the media storage unit **18** as desired by the user. Once the personal collection of audio and video media content **41** is synchronized with the media storage unit **18**, the media source **36** may retrieve media content from the media storage unit **18** for presentation upon the video system **12**.

[0050] As briefly mentioned above, the media source **36** includes a storage medium upon which audio and video media content is stored, at least temporarily, for display upon the video monitor **16** of the video system **12** as desired by a user. For example, and in accordance with a preferred embodiment of the present invention, the media source **36** is a flash memory device upon which both audio and video content, as well as other viewable content, may be readily stored. However, and as those skilled in the art will certainly appreciate, the media source **36** may take a variety of forms as technology moves forward, without departing from the spirit of the present invention.

[0051] In addition to the provision of the media source **36** as described above for use in conjunction with the video system **12**, the video system **12** may also be provided with a DVD player or other similar media player allowing the operator to play videos when those available via the media source described above are not desired.

[0052] The wireless global communication network access point **38** is mounted within the automobile **20** and is coupled

to the media storage unit **18**, which is in wireless communication with the media source **36** for the transfer of data therebetween. The wireless connection between the media source **36** and the media storage unit **18** may be achieved by various known protocols, for example, but not limited to WiFi. While a wireless connection between the network access point **38** and the media source **36** is disclosed in accordance with a preferred embodiment of the present invention, it is possible the utilization of a conventional wired connection might be more appropriate under certain circumstances and the use thereof would certainly fall within the spirit of the present invention. As storage capacity also increases, it is contemplated it may be possible to hold all of the media content within the video system **12**, that is, the media source **36** of the video system **12**. As such, and considering this possibility, the media storage unit **18** would be obsolete and the media source **36** would directly, and preferably wirelessly, communicate with the network access point **38**.

[0053] In accordance with a preferred embodiment of the present invention, the wireless global communication network access point **38** provides users with access to a global communication network, for example, the Internet **40**, for access to a variety of data sources in a real time, high-speed manner. The wireless global communication network **40** allows the media storage unit **18**, to which it is connected via the wireless global communication network access point **38**, to synchronize with the remote library **34**.

[0054] With this in mind, and as briefly discussed above, the media storage unit **18** includes wired or wireless communication capabilities permitting communication with the wireless global communication network access point **38** for retrieval of audio and video media content from the remote library **34** for display upon the video monitor **16** of the video system **12**. As will be appreciated based upon the present disclosure, the media storage unit **18** downloads information from the operator's personal collection of audio and video media content **41** or from a secure media source containing selected content maintained on the remote library **34** for storage therein and display upon the video monitor.

[0055] More specifically, a remote library **34** of audio and video media content is in wireless communication with the media storage unit **18** via the wireless global communication network access point **38**. The remote library **34** includes storage space **39** for uploading of media content from a personal collection of audio and video media content **41** from a user for subsequent transmission to the media storage unit **18** upon synchronization of the remote library **34** with the media storage unit **18** thereby providing the user with access to a personal collection of audio and video media content **41**.

[0056] As briefly mentioned above, an access approval code is associated with the media storage unit **18** instructing the remote library **34** to synchronize the audio and video media content with the media storage unit **18** as desired by the user. As a result, each time the media storage unit **18** is activated, or when desired by the operator under certain circumstances, the media storage unit **18** will communicate with the remote library **34** via the network access point **38** to ascertain whether additional audio or video content is available. If it is determined audio or video content is available for downloading, the content will either be downloaded to the media storage unit **18** automatically or the user will be provided with a prompt asking whether he or she wishes to have

the audio and/or video content download to the media storage unit **18** for transmission to the media source **36** for viewing upon the monitor **16**.

[0057] In addition to providing the user with access to a personal collection of audio and video media content, the remote library **34** of audio and video content may also provide the operator with access to selected content **43** he or she subscribes to through a predetermined subscription arrangement. For example, the operator may be provided with access to a certain level of video content (for example, old documentaries) through the provision of one subscription fee or the operator may be provided with access to another level of video content (for example, first run movies) through the provision of another subscription fee.

[0058] Although it is contemplated media content will not be permanently stored upon the video system and the media source will only facilitate the streaming of data between the media storage unit and the video system, it may be desirable for some applications to allow storage of a substantial amount of media directly upon the video system. As such, the video system may further be provided with a large flash drive, hard drive or other data storage device which the criteria upon which the present invention is based permits.

[0059] As briefly discussed above, the video system **12** in accordance with the present invention is fully portable and may be carried from one location to another location. However, when the video system **12** is utilized with an automobile it will be important for the safety of all traveling within the automobile that the video system is securely supported within the automobile **20**.

[0060] As such, a supporting structure **42** is provided for selectively supporting the video system **12** within the automobile **20**. In accordance with a first embodiment, the supporting structure **42** is composed of a drawer **44** integrally formed with the headrest **30**. The drawer **44** includes a base support **46** integrated within the headrest body **48** and a drawer member **50** that selectively moves from a closed/use position (see FIG. 2) within the base support **46** such that the entire drawer **44** is substantially flush with the rear surface **52** of the headrest **30** and an open/exchange position (see FIG. 3) where the drawer member **50** is withdrawn from the base support **46** for selective insertion of the video system **12** within the drawer **44**, and ultimately within the headrest **30**.

[0061] More particularly, the base support **46** is substantially rectangular and defines a central recess **54** shaped and dimensioned to receive the drawer member **50** and the video system **12**. The drawer member **50** includes a transparent front wall **56** from which first, second and third sidewalls **58**, **60**, **62** extend for positioning within the recess **54** of the base support **46**. The first, second and third sidewalls **58**, **60**, **62** are respectively positioned along the left side, bottom and right side of the front wall **56** leaving an insertion slot **64** along the top of the drawer member **50** that is shaped and dimensioned for receipt of the video system **12**. Each of the first sidewall **58**, second sidewall **60** and third sidewall **62** includes an alignment member **58a**, **60a**, **62a** extending therefrom. The alignment members **58a**, **60a**, **62a** are shaped and dimensioned to guide the video system **12** as it is inserted within the drawer **44**.

[0062] Movement of the drawer member **50** relative to the base support **46** is controlled by a servomotor **66** that selectively moves the drawer member **50** between its closed position and its open position. Actuation of the servomotor **66** is preferably controlled by a switch **68** mounted on the headrest

30. Although a servomotor is disclosed in accordance with a preferred embodiment of the present invention, it is contemplated alternative automated and manual movement mechanisms may be utilized without departing from the spirit of the present invention.

[0063] In practice, the switch 68 is actuated to move the drawer member 50 to its open position exposing the insertion slot 64 for slipping the video system 12 within the drawer 44. The video system 12 is inserted within the drawer 44 such that the monitor 16 thereof is facing the transparent front wall 56 of the drawer member 50 for viewing by a passenger sitting within the rear seat of the automobile 20. Thereafter, the switch 68 is actuated again causing the drawer member 50 to move to its closed position.

[0064] Power is supplied to the video system 12 by providing an electrical connection 69 within the drawer 44 that links with video system 12 for transmitting power to the secondary coil 28 and battery 24 of the video system 12 via the inductive charging system 70 which links the primary coil 26 within the seat back 72 positioned at the upper edge 74 of the seat back 72 to the secondary coil 28 within the video system 12. To assist with the transfer of energy from the primary coil 26 (which is powered by the electrical system of the automobile) to the secondary coil 28, the drawer 44 is provided with a telescoping coupling member 76 that electrically links the secondary coil 28 of the video system 12 with the primary coil 26.

[0065] More particularly, the telescoping coupling member 76 is composed of a selectively telescoping arm 78 through which an electrical wire 80 extends for linking the distal end 82 of the telescoping arm 78 to the secondary coil 28 of the video system 12. In order to ensure that the telescoping arm 78 is drawn toward the primary coil 26, the distal end 82 of the telescoping arm 78 is magnetically charged for attraction to a magnetically charged shroud 84 of the primary coil 26. As such, when it is desired to power the video system 12, a latch mechanism 86 associated with the telescoping arm 78 is released in a manner allowing the telescoping arm 78 to move toward the primary coil 26 improving the efficiency of the inductive coupling between the secondary coil 28 of the video system 12 and the primary coil 26 within the seat back 72. When the user no longer wishes to use the video system 12, and the video system 12 no longer requires power, the telescoping arm 78 is pushed up into a recess 88 formed along the bottom 90 of the headrest 30 with the latch mechanism 86 holding it in this position.

[0066] In accordance with a second embodiment, and with reference to FIGS. 4, 5 and 6, the video system 112 is not removable from the headrest 130, but is rather formed as part of a slip cover 142 shaped and dimensioned to fit over the headrest 130 with the video monitor 116 facing rearwardly for viewing by automobile passengers sitting within the rear seat of the automobile 120. More particularly, the slipcover 142 is composed of a fabric base structure 144 shaped and dimensioned to fit over the headrest 130. The fabric base structure 144 includes a front wall 148, first and second sidewalls 149, 150, a rear wall 152, and a bottom wall 154. In order to facilitate the selective positioning of the fabric base structure 144 over the headrest 130, the bottom wall 154 of the fabric base structure 144 is provided with a zipper 156 allowing for expansion and closure of the bottom wall 154 to allow the fabric base structure 144 to fit over the headrest 130.

[0067] A video monitor 116 is mounted along the rear wall 152 of the fabric base structure 144 for pivotal movement

allowing adjustment for viewing by a passenger sitting in a rear seat of the automobile 120. The electronic components relating to the powering and functioning of the video monitor are mounted within fabric base structure 144.

[0068] As with the embodiment described above with reference to FIGS. 1 to 3, power is supplied to the video system 112 by providing an electrical connection 169 within slip cover 142 that links with video system 112 for transmitting power to the video system 112 via the inductive charging system 170 which links the primary coil 126 within the seat back 172 positioned at the upper edge 174 of the seat back 172 to the secondary coil 128 within the video system 112. To assist with the transfer of energy from the primary coil 126 to the secondary coil 128, the bottom wall 154 is provided with a telescoping coupling member 176 that electrically links the secondary coil 128 of the video system 112 with the primary coil 126.

[0069] More particularly, the telescoping coupling member 176 is composed of a selectively telescoping arm 178 through which an electrical wire 180 extends for linking the distal end 182 of the telescoping arm 178 to the secondary coil 128 of the video system 112. In order to ensure that the telescoping arm 178 is drawn toward the primary coil 126, the distal end 182 of the telescoping arm 178 is magnetically charged for attraction to a magnetically charged shroud 184 of the primary coil 126. As such, when it is desired to power the video system 112, a latch mechanism 186 associated with the telescoping arm 178 is released in a manner allowing the telescoping arm 178 to move toward the primary coil 126 improving the efficiency of the inductive coupling between the secondary coil 128 of the video system 112 and the primary coil 126 within the seat back 172. When the user no longer wishes to use the video system 112, and the video system 112 no longer requires power, the telescoping arm 178 is pushed up into a recess 188 formed along the bottom wall 154 of the fabric base structure 144 of the headrest 130 with the latch mechanism 186 holding it in this position.

[0070] In accordance with yet a further embodiment of the present invention, a snap fit mechanism 242 is implemented for selective mounting of the video system 212 within the headrest 230. More particularly, and with reference to FIGS. 7 to 10, the snap fit mechanism 242 includes a recessed support structure 244 into which the video system 212 is snap fit in accordance with the present invention.

[0071] The recessed support structure 244 includes a base support 246 that is fit within a recess formed in a headrest 230. The recessed support structure 244 includes a closed base wall 248, first, second, third, and fourth sidewalls 250, 252, 254, 256 extending from a perimeter edge of the closed base wall 248, and an open top 258 shaped and dimensioned for receipt of a video system 212 in accordance with a preferred embodiment and as discussed below in greater detail.

[0072] A false front wall 260 is supported within the recessed support structure 244 for movement from a recessed position adjacent the closed base wall 248 (see FIGS. 9 and 10) to an exposed position covering the open top 258 when the device is not in use (see FIGS. 7 and 8). As such, the false front wall 260 is maintained in an orientation such that the plane in which the false front wall 260 lies is substantially parallel to the plane in which the closed base wall 248 lies.

[0073] Controlled movement of the false front wall 260 is facilitated by sliding spring arms 272 that extend between the closed base wall 248 and the rear surface 270 of the false front wall 260. The sliding spring arms 272 are biased to force the

false front wall **260** to its exposed position as shown with reference to FIGS. **7** and **8**. When rearward force is applied to the false front wall **260**, the bias of the sliding spring arms **272** is overcome and the false front wall **260** is moved to its recessed position as shown in FIGS. **9** and **10**.

[0074] In practice, the spring biased nature of the false front wall **260** allows a user to move the false front wall **260** from its exposed position to its recessed position by simply applying a slight force to the false front wall **260** toward its recessed position and forcing it toward the closed base wall **248**. When the false front wall **260** reaches its recessed position latches **262** within the recessed support structure **244** extend between the false front wall **260** and the base support **246** to hold the false front wall **260** in its recessed position. Actuation of the latches **262** is achieved by a central button **264** positioned along the false front wall **260** that upon pressing releases the latches **262** to allow movement of the false front wall **260**. Similarly, the latches **262** securely hold the false front wall **260** in its exposed position until such a time that a user wishes to move it inwardly toward its recessed position.

[0075] Once the false front wall **260** is moved to its recessed position, the cavity **266** defined by the base support **246** is available for receiving the video system **212** in accordance with the present invention. The video system **212** is simply slipped into the cavity **266** and held in position by conventional coupling mechanisms. Removal of the video system **212** is achieved by simply reversing the steps outlined above.

[0076] As with the embodiments described above with reference to FIGS. **1** to **4**, power is supplied to the video system by providing an electrical connection within recessed support structure **244** that links with video system **212** for transmitting power to the video system **212** via the inductive charging system **270** which links the primary coil **226** within the seat back **272** positioned at the upper edge **274** of the seat back **272** to the secondary coil **228** within the video system **212**. To assist with the transfer of energy from the primary coil **226** to the secondary coil **228**, the bottom of the headrest **230** is provided with a telescoping coupling member **276** that electrically links the secondary coil **228** of the video system **212** with the primary coil **226**.

[0077] More particularly, the telescoping coupling member **276** is composed of a selectively telescoping arm **278** through which an electrical wire **280** extends for linking the distal end **282** of the telescoping arm **278** to the secondary coil **228** of the video system **212**. In order to ensure that the telescoping arm **278** is drawn toward the primary coil **226**, the distal end **282** of the telescoping arm **278** is magnetically charged for attraction to a magnetically charged shroud **284** of the primary coil **226**. As such, when it is desired to power the video system **212**, a latch mechanism **286** associated with the telescoping arm **278** is released in a manner allowing the telescoping arm **278** to move toward the primary coil **226** improving the efficiency of the inductive coupling between the secondary coil **228** of the video system **212** and the primary coil **226** within the seat back **272**. When the user no longer wishes to use the video system **212**, and the video system **212** no longer requires power, the telescoping arm **278** is pushed up into a recess **288** formed along the bottom wall **290** of the headrest **230** with the latch mechanism **286** holding it in this position.

[0078] While the preferred embodiments have been shown and described, it will be understood that there is no intent to limit the invention by such disclosure, but rather, is intended

to cover all modifications and alternate constructions falling within the spirit and scope of the invention.

1. A mobile entertainment system, comprising:
 - a video system designed for reducing energy consumption, the video system including a battery permitting proximity charging of the video system; and
 - a supporting structure supporting the video system within a vehicle.
2. The mobile entertainment system according to claim 1, wherein the power consumption of the video system is less than approximately 2 Amps.
3. The mobile entertainment system according to claim 2, wherein the power consumption of the video system is less than approximately 0.5 Amps.
4. The mobile entertainment system according to claim 1, wherein the video system includes a housing in which a monitor is mounted for viewing by those utilizing the mobile entertainment system, and media content for display upon the monitor is wirelessly transmitted to the video system via a media storage unit mounted within the vehicle.
5. The mobile entertainment system according to claim 1, wherein the video system is provided with touch screen functionality.
6. The mobile entertainment system according to claim 1, wherein a secondary coil is electrically linked to the battery of the video system for inductive coupling with a primary coil coupled to a power supply circuit of the vehicle.
7. The mobile entertainment system according to claim 6, wherein a telescoping coupling member electrically links the secondary coil of the video system with the primary coil.
8. The mobile entertainment system according to claim 7, wherein the telescoping coupling member is composed of a selectively telescoping arm through which an electrical wire extends for linking a distal end of the telescoping arm to the secondary coil of the video system.
9. The mobile entertainment system according to claim 8, wherein the distal end of the telescoping arm is magnetically charged for attraction to a magnetically charged shroud mounted within the vehicle and linked to the primary coil.
10. The mobile entertainment system according to claim 6, wherein the primary coil is mounted in the seat back of the vehicle in proximity to the secondary coil.
11. The mobile entertainment system according to claim 10, wherein the video system is mounted within a headrest of the vehicle.
12. The mobile entertainment system according to claim 11, wherein a telescoping coupling member electrically links the secondary coil of the video system with the primary coil.
13. The mobile entertainment system according to claim 12, wherein the telescoping coupling member is composed of a selectively telescoping arm through which an electrical wire extends for linking a distal end of the telescoping arm to the secondary coil of the video system.
14. The mobile entertainment system according to claim 13, wherein the distal end of the telescoping arm is magnetically charged for attraction to a magnetically charged shroud mounted within the vehicle and linked to the primary coil.
15. The mobile entertainment system according to claim 1, wherein the video system includes a housing in which a monitor is mounted for viewing by those utilizing the mobile entertainment system, and the monitor is an organic LED.
16. The mobile entertainment system according to claim 1, wherein the supporting structure allows for selective supporting of the video system within the vehicle.

17. The mobile entertainment system according to claim 16, wherein the supporting structure is composed of a drawer integrally formed with the vehicle.

18. The mobile entertainment system according to claim 17, wherein the drawer is integrally formed within a headrest of the vehicle.

19. The mobile entertainment system according to claim 17, wherein the drawer includes a transparent front wall.

20. The mobile entertainment system according to claim 17, wherein the drawer includes a base support and a drawer member, and movement of the drawer member relative to the base support is controlled by a servomotor that selectively moves the drawer member between its closed position and its open position.

21. The mobile entertainment system according to claim 1, wherein the supporting structure is a slipcover shaped and dimensioned to fit over a headrest.

22. The mobile entertainment system according to claim 21, wherein the slipcover is composed of a fabric base structure shaped and dimensioned to fit over the headrest, and includes a zipper allowing for expansion and closure to allow the fabric base structure to fit over the headrest.

23. The mobile entertainment system according to claim 1, wherein the supporting structure is a recessed support structure into which the video system is snap fit.

24. The mobile entertainment system according to claim 23, wherein the recessed support structure includes a base support that is fit within a recess formed in a headrest, and a false front wall is supported within the recessed support structure for movement from a recessed position adjacent a closed base wall of the recessed support structure and an exposed position covering an open top of the recessed support structure.

* * * * *