

US 20190308584A1

(19) **United States**

(12) **Patent Application Publication**
Eaton et al.

(10) **Pub. No.: US 2019/0308584 A1**

(43) **Pub. Date: Oct. 10, 2019**

(54) **ENERGY ABSORBING DEVICES FOR USE WITH WEBS**

Publication Classification

(71) Applicant: **Shield Restraint Systems, Inc.**,
Elkhart, IN (US)

(51) **Int. Cl.**
B60R 22/28 (2006.01)
B60R 22/10 (2006.01)
B60R 22/12 (2006.01)

(72) Inventors: **James Russell Eaton**, Carmel, IN (US);
Phillip Dale Morgan, Noblesville, IN (US)

(52) **U.S. Cl.**
CPC **B60R 22/28** (2013.01); **B60N 2/2809**
(2013.01); **B60R 22/12** (2013.01); **B60R 22/105** (2013.01)

(21) Appl. No.: **16/373,978**


(57) **ABSTRACT**

(22) Filed: **Apr. 3, 2019**

Energy absorbing devices for use with child seat restraint webs, seat belt webs, and other webs are disclosed herein. In some embodiments, an energy absorbing device includes a body having first and second apertures that receive a portion of a web, such as a web of an occupant restraint system. When a load is applied to the web, such as in a vehicle crash, the body deflects under the load from a first shape to a second shape to absorb the energy transmitted by the web.

Related U.S. Application Data

(60) Provisional application No. 62/652,670, filed on Apr. 4, 2018.

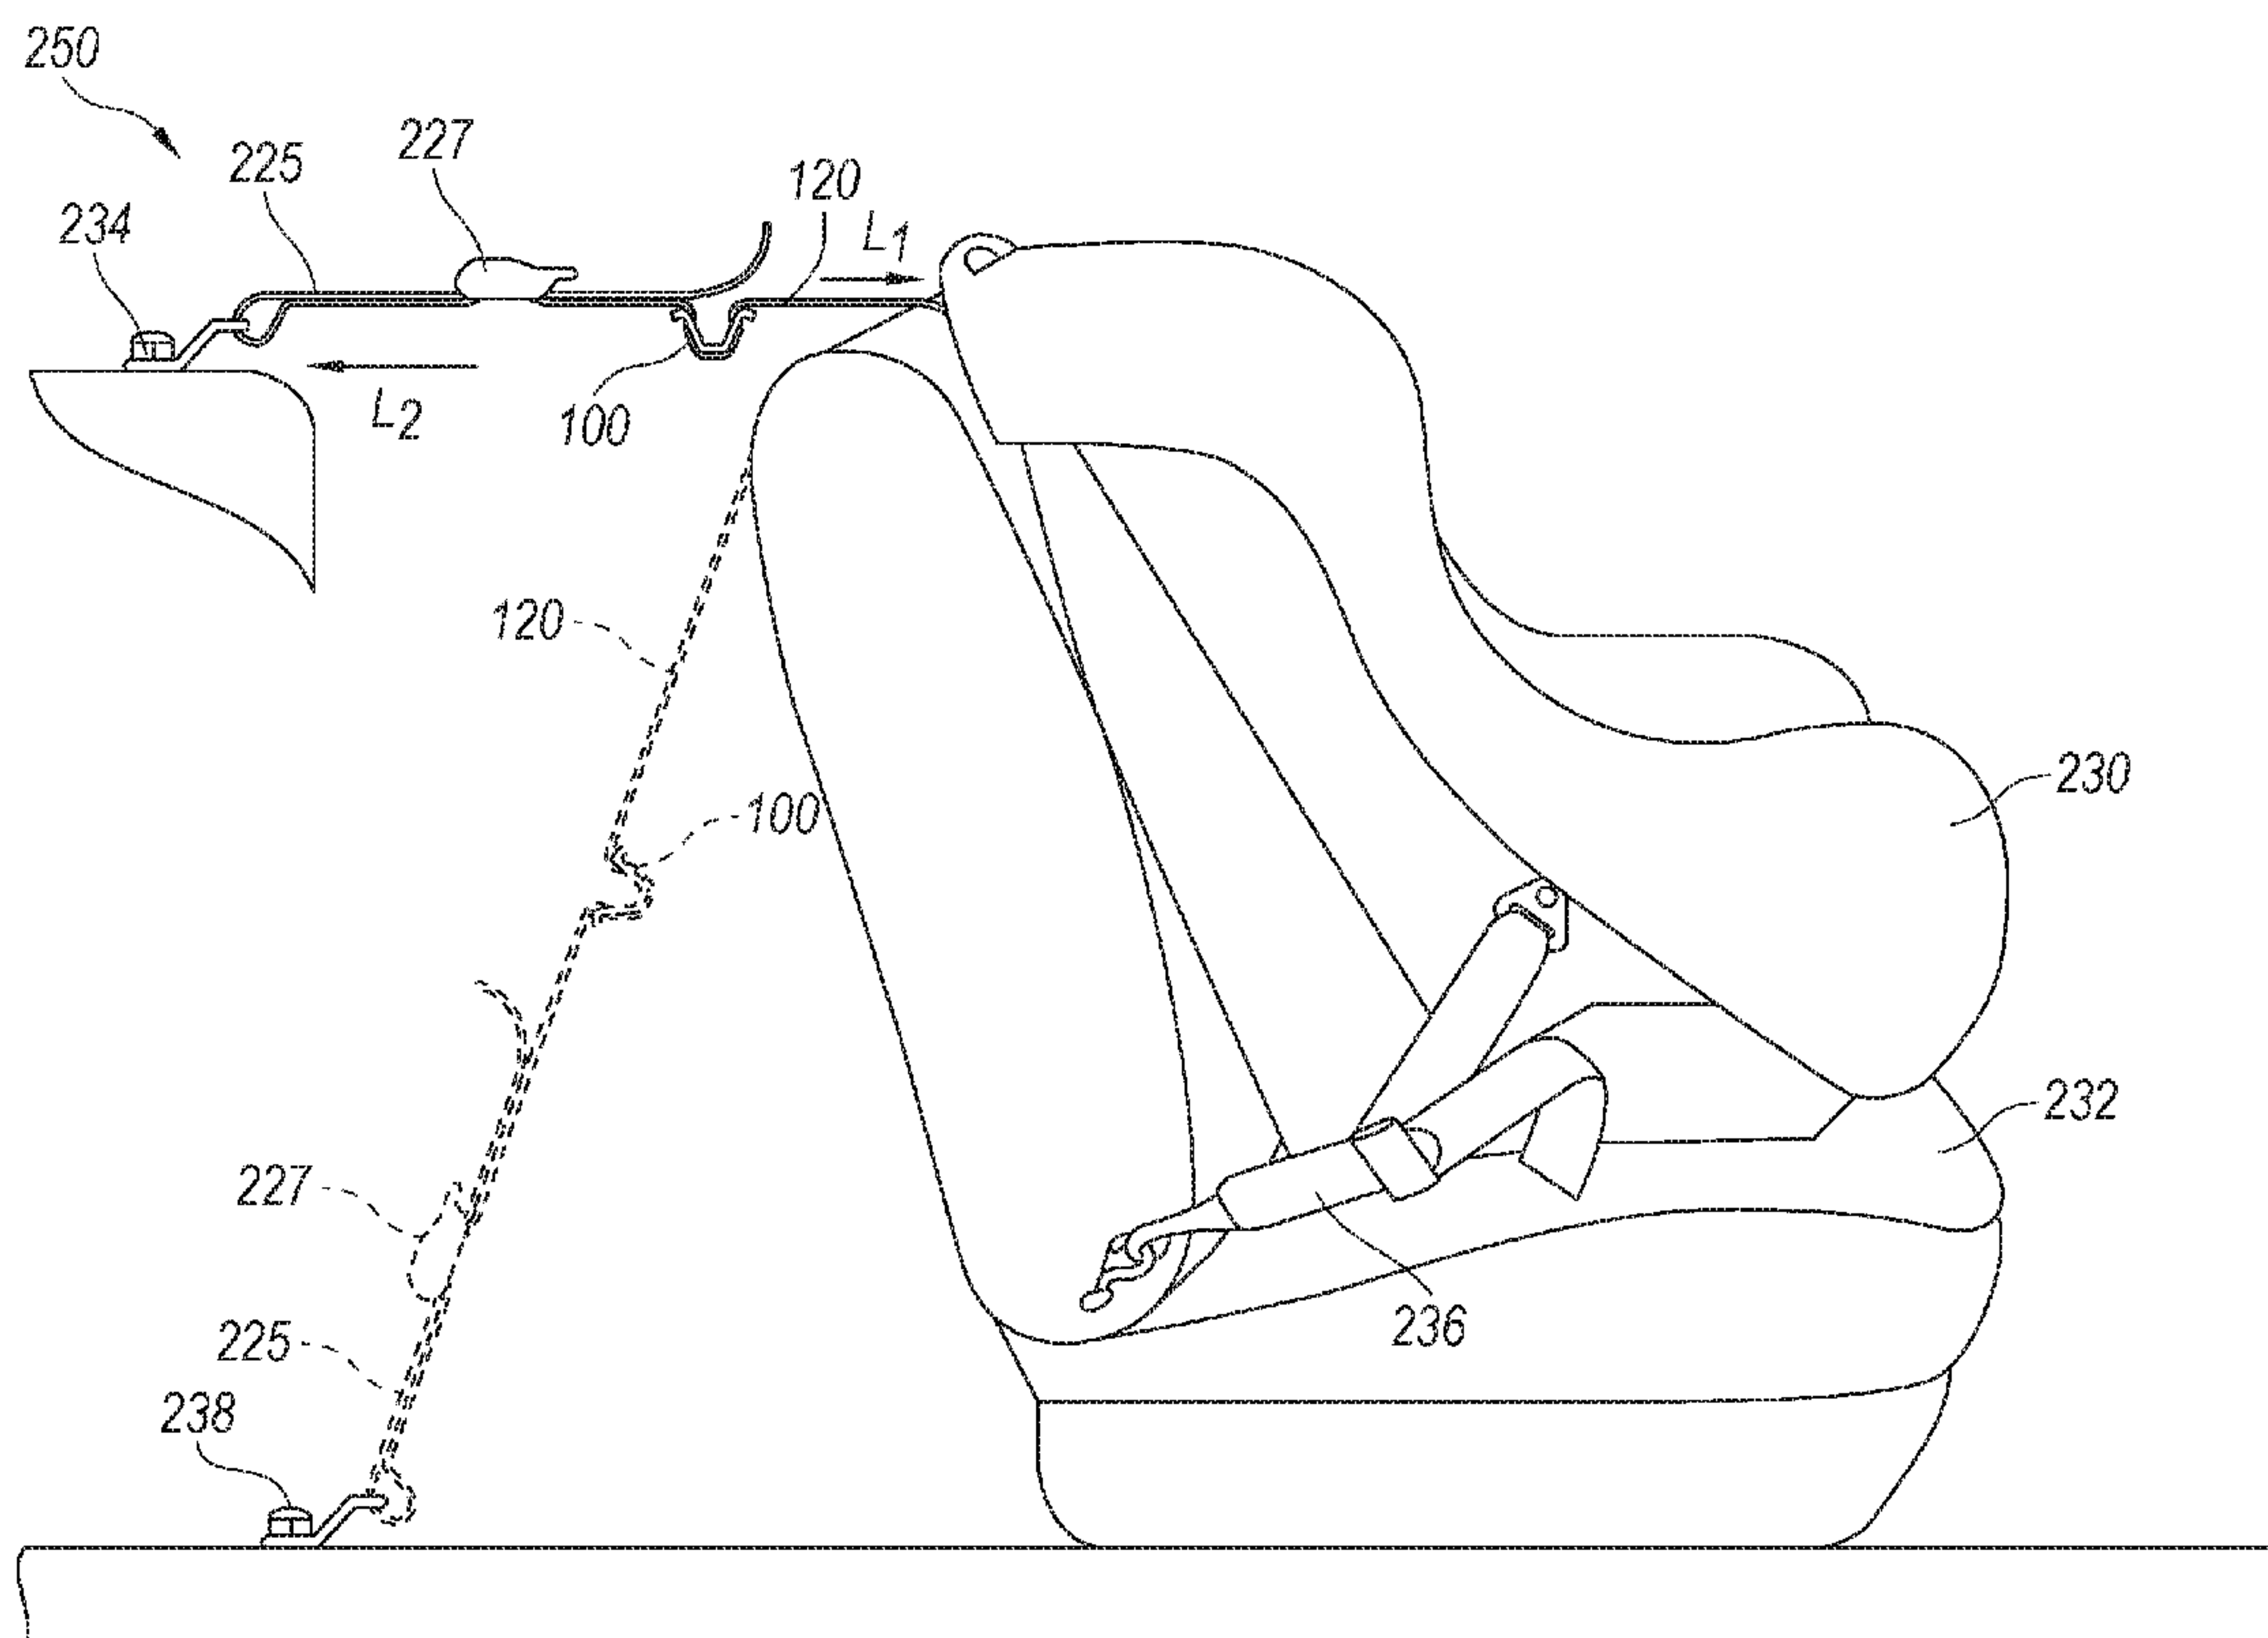

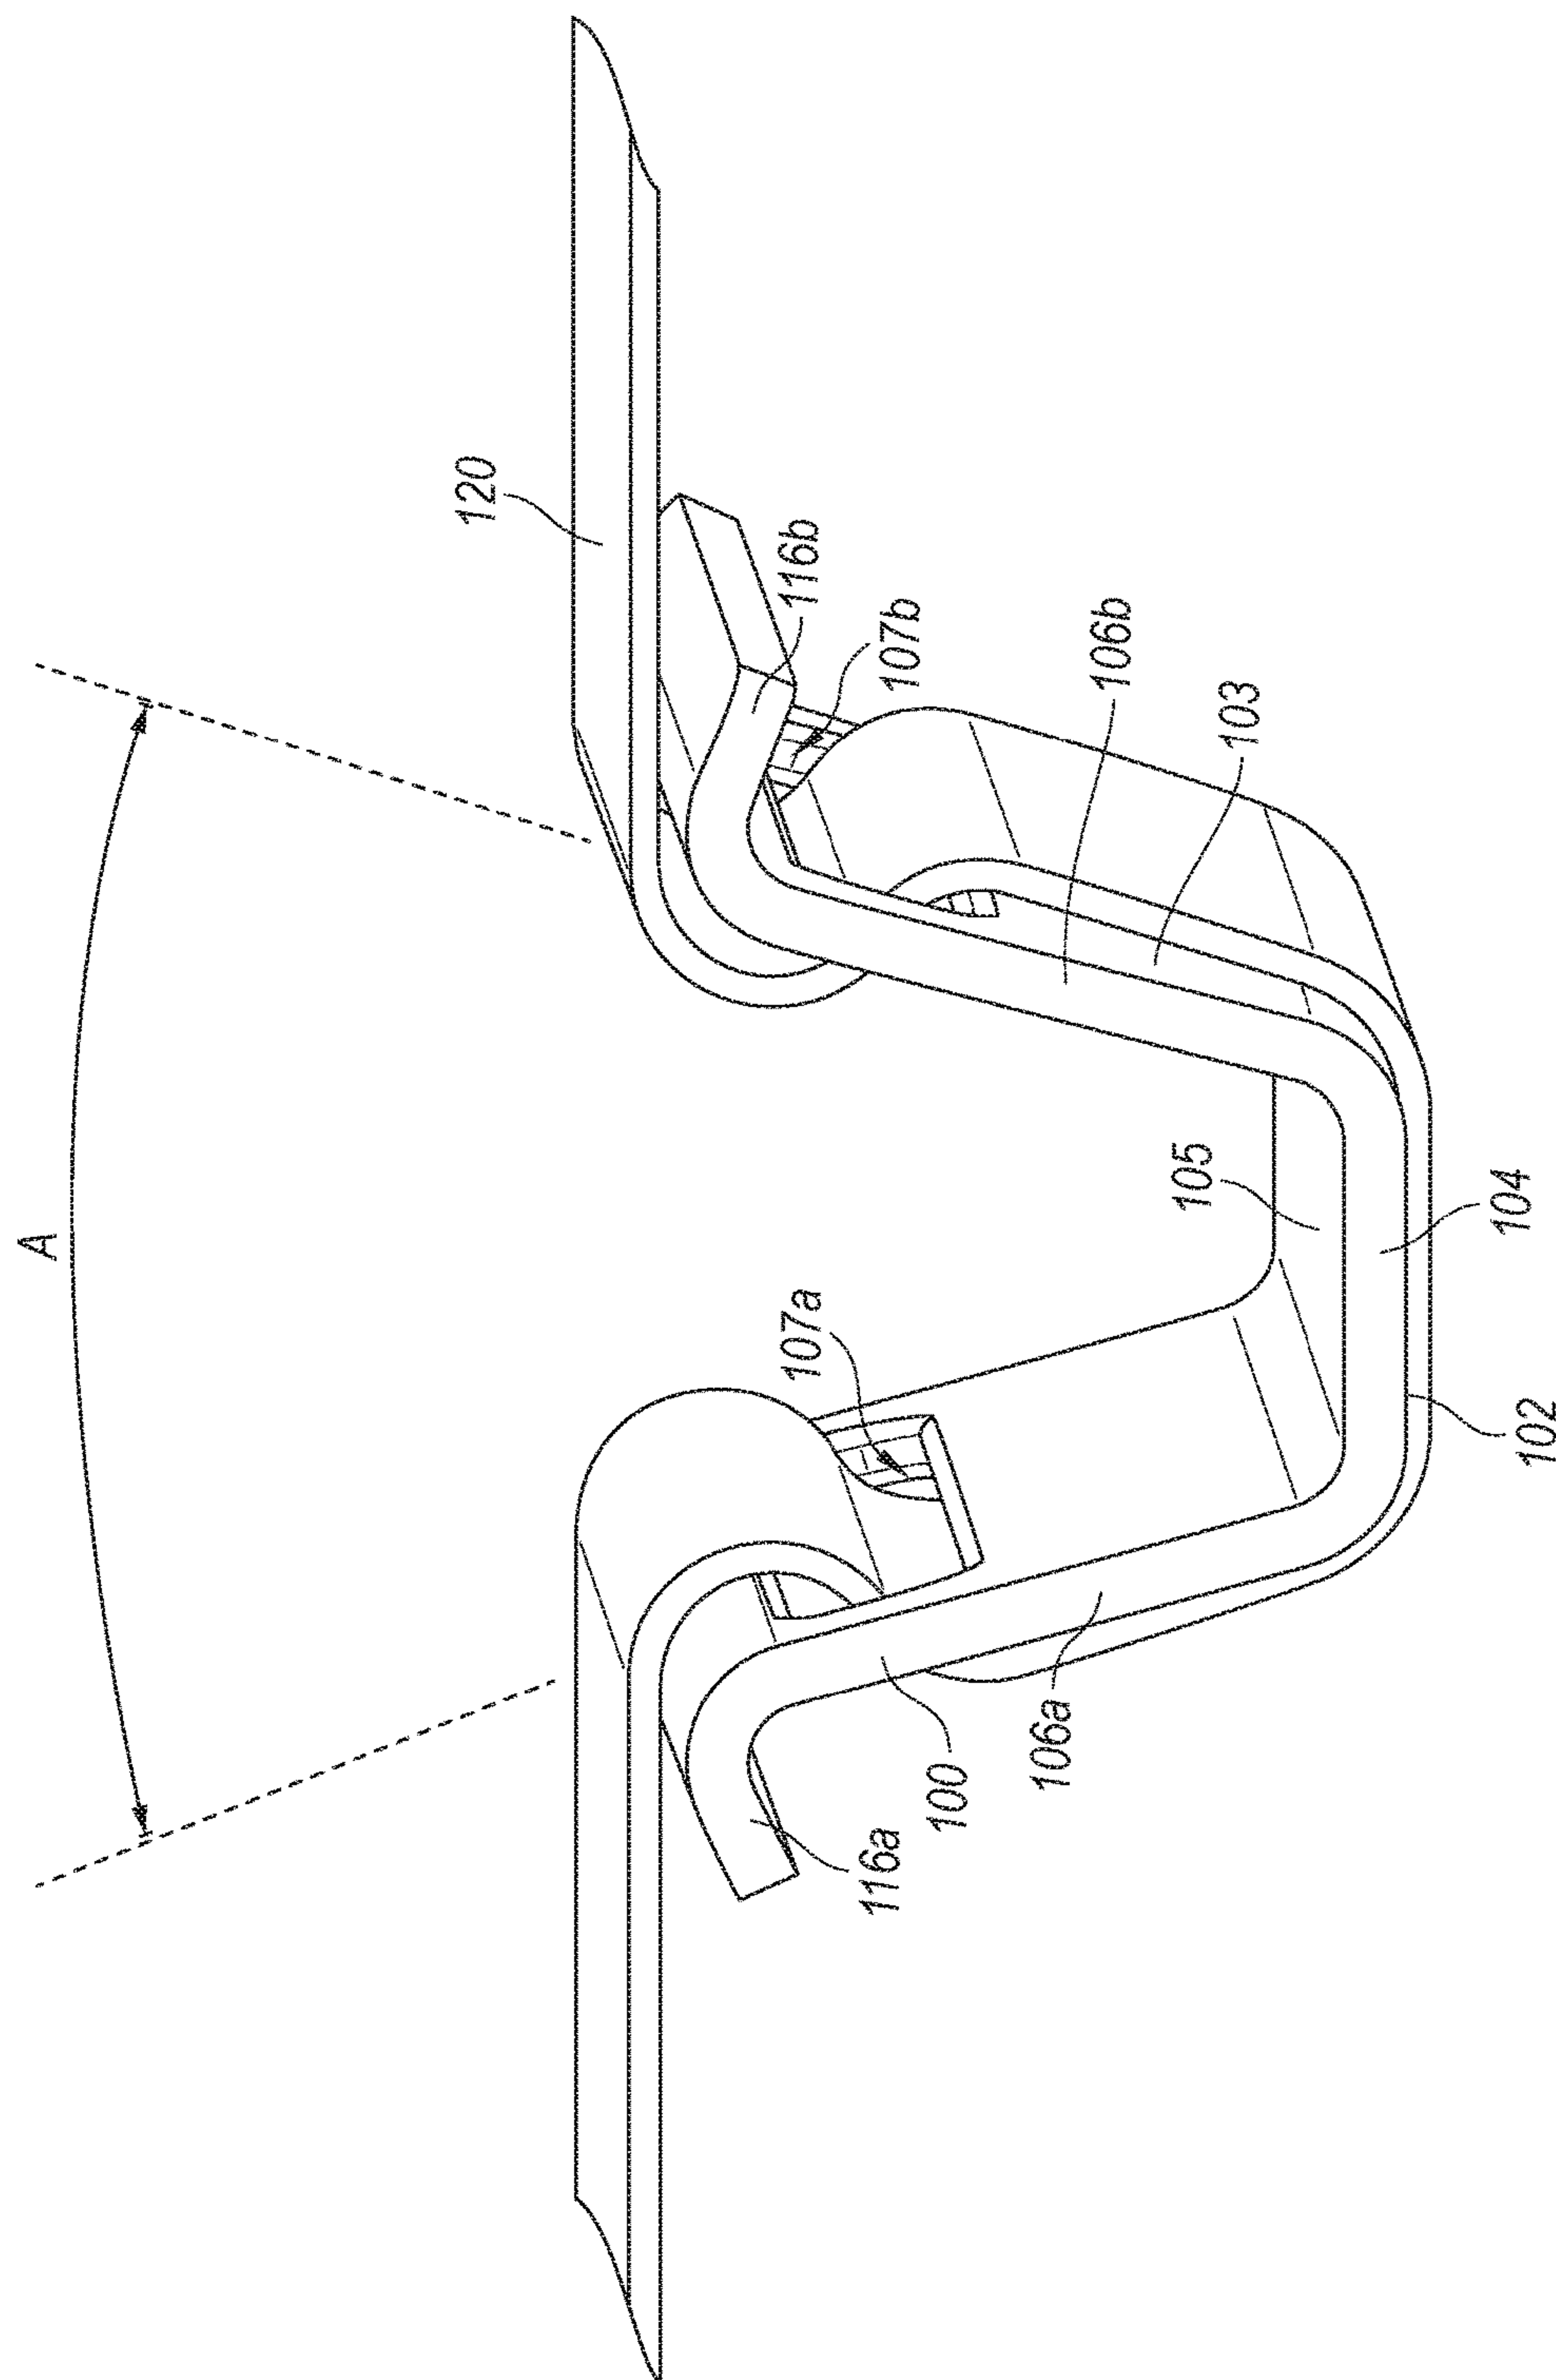


Fig. 1A

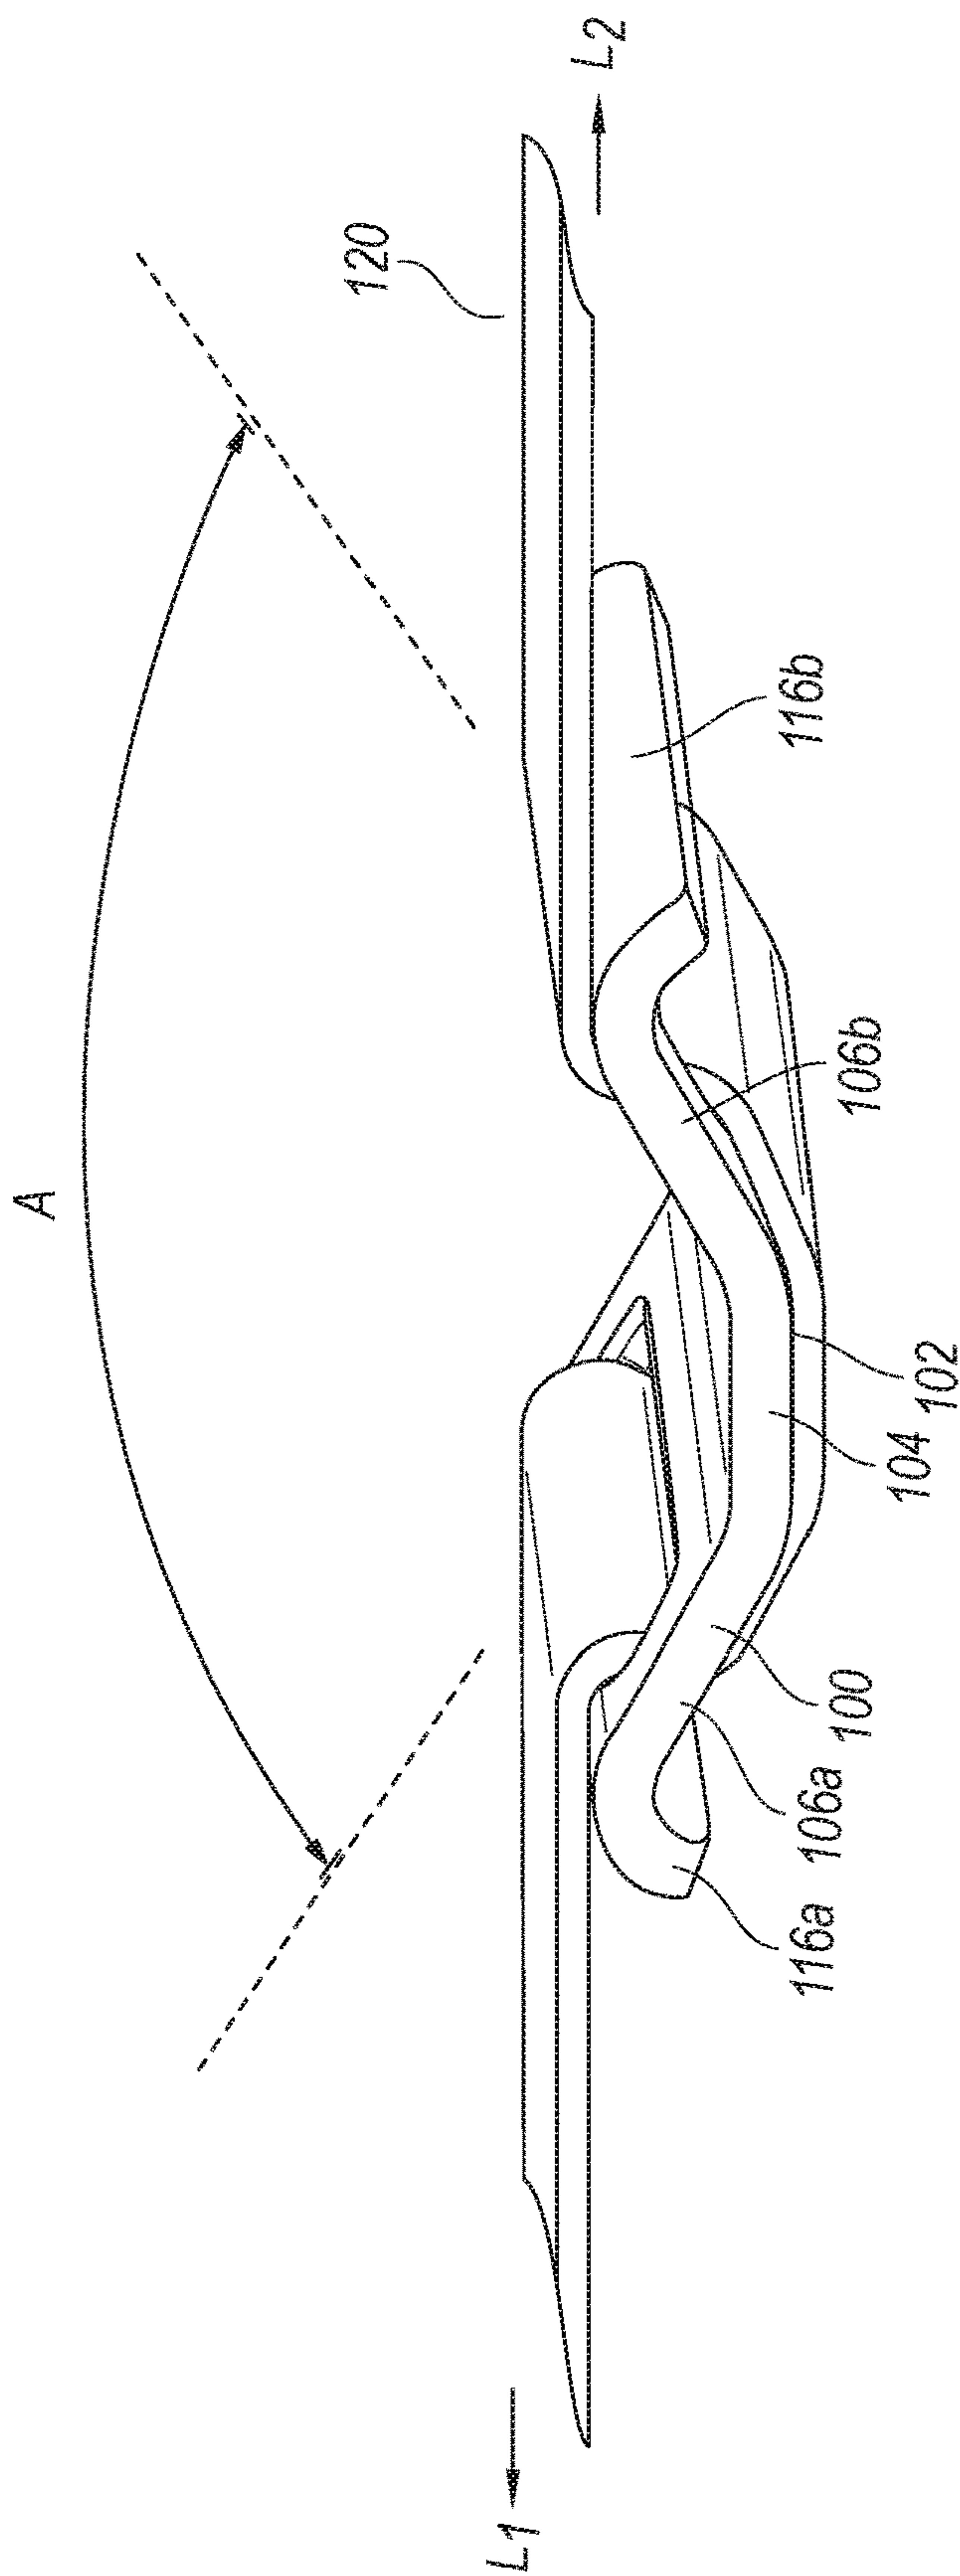


Fig. 1B

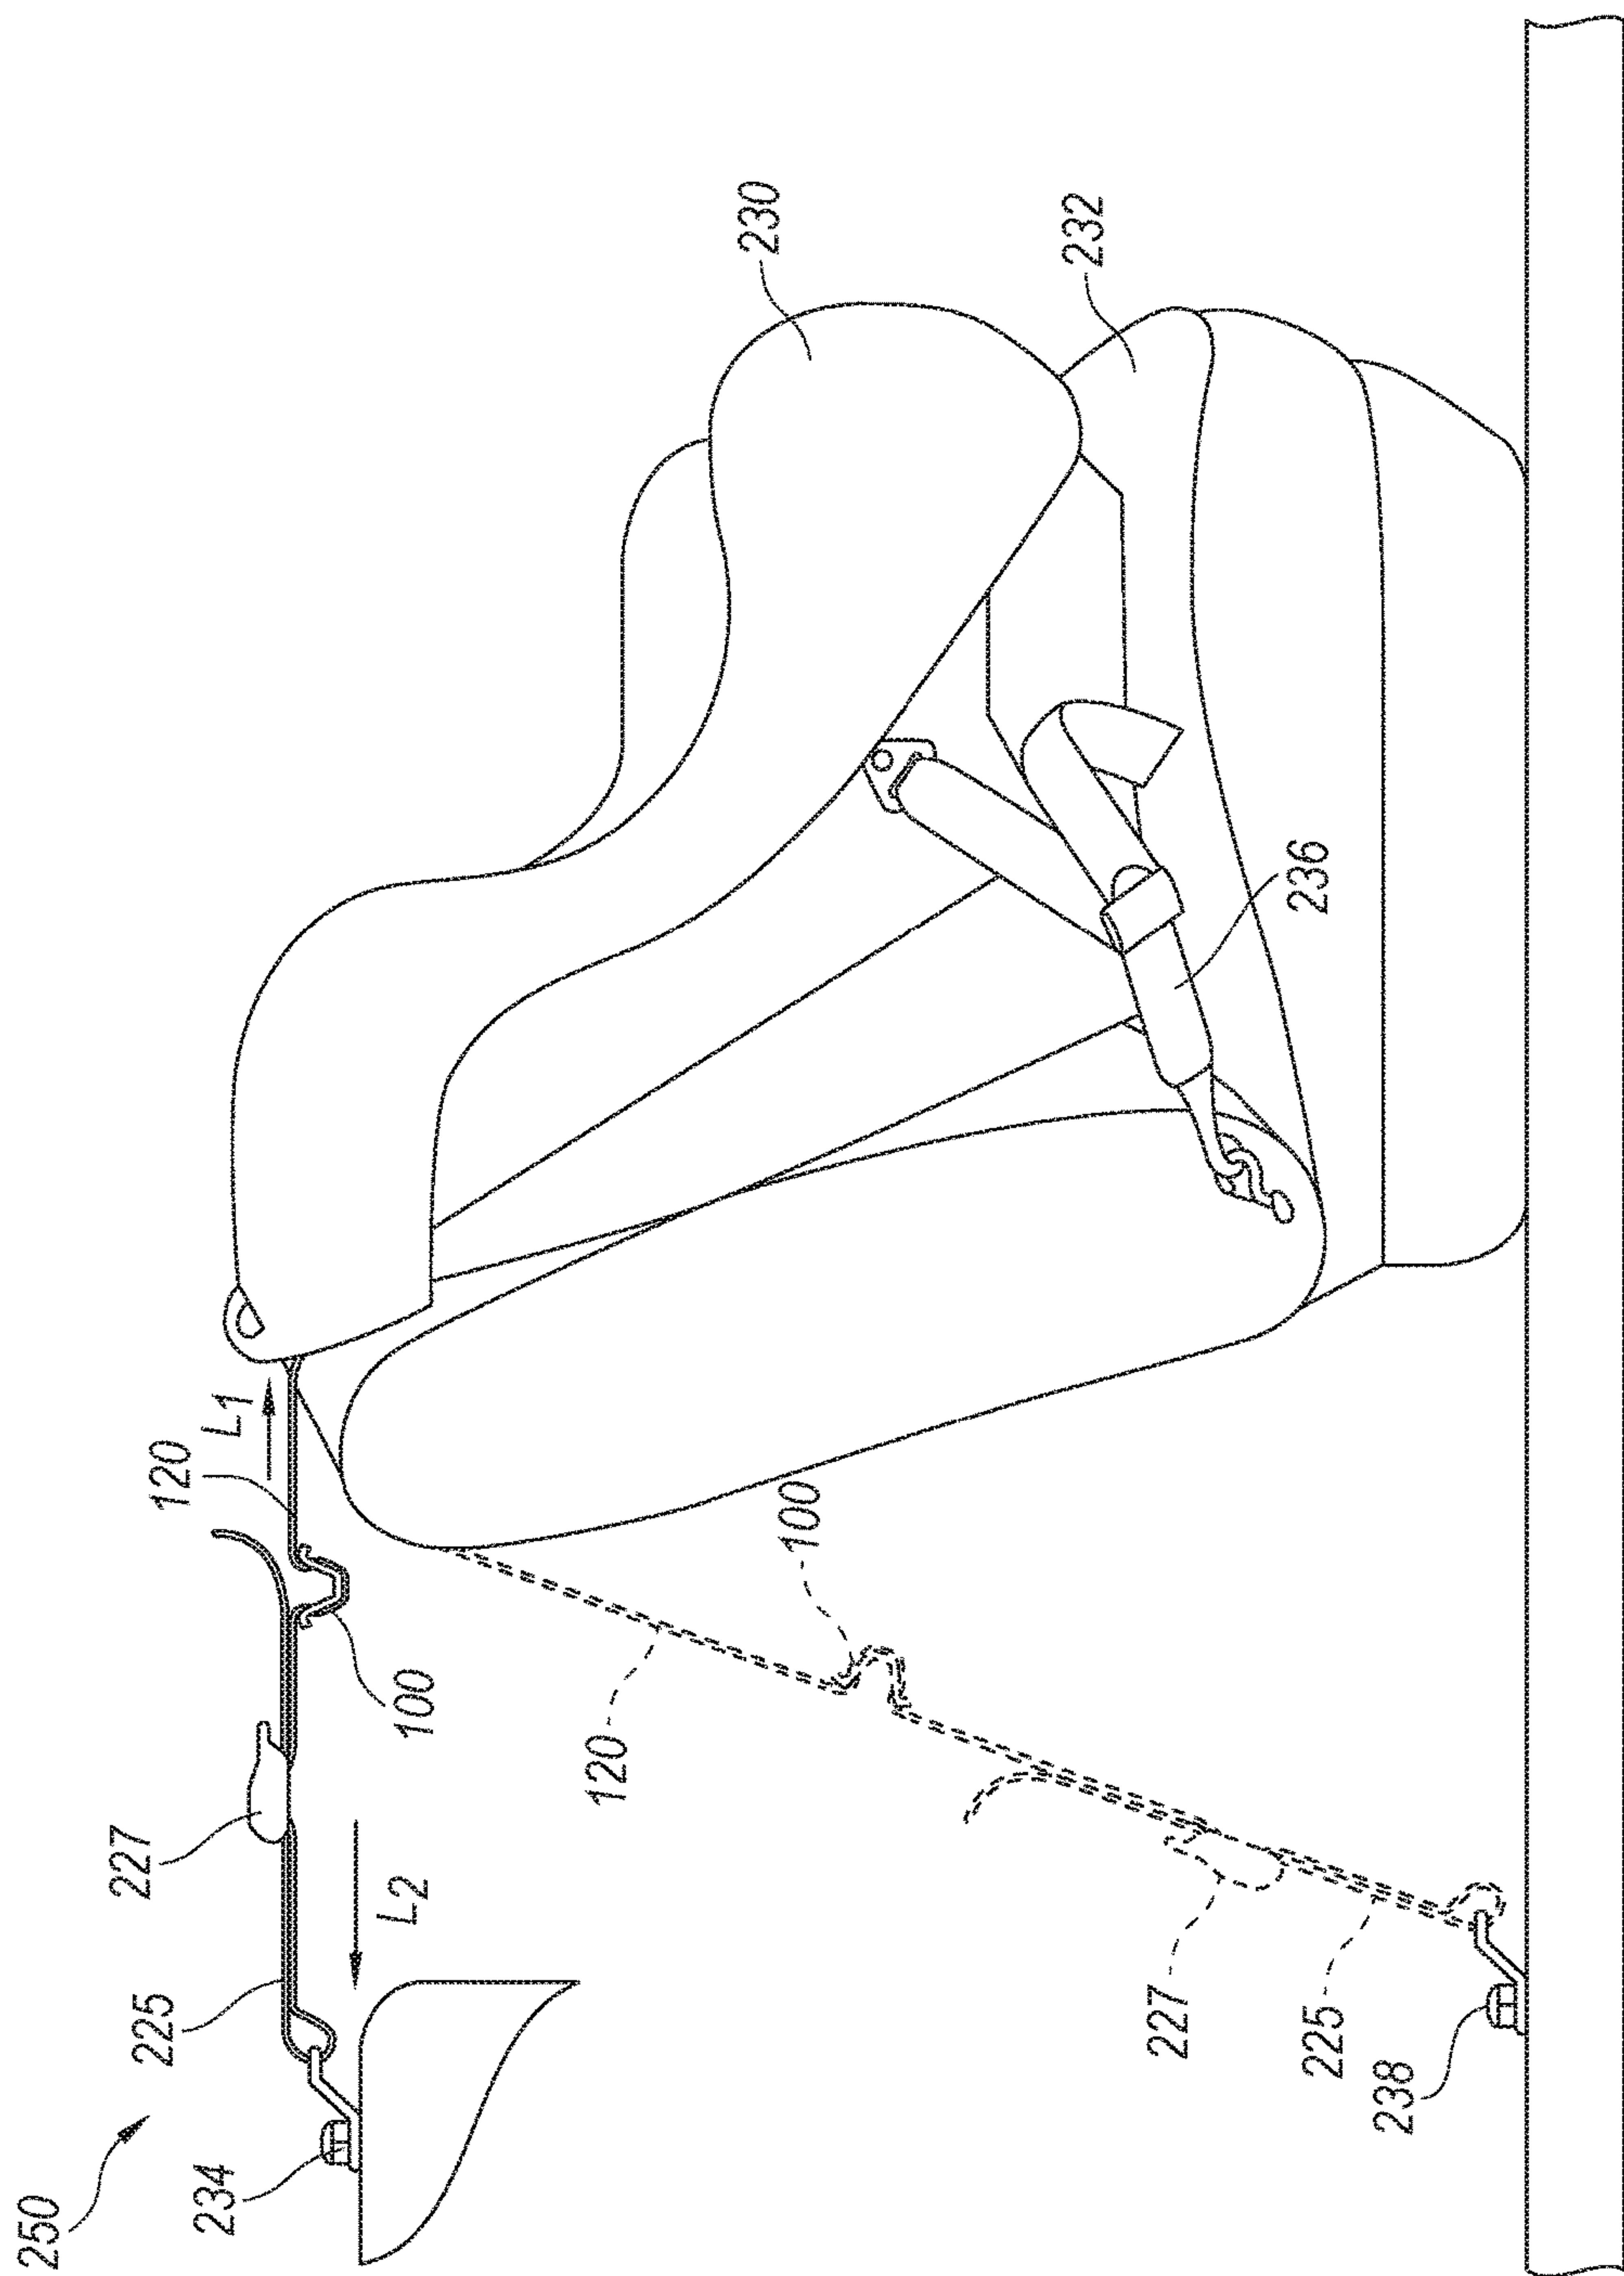


Fig. 2

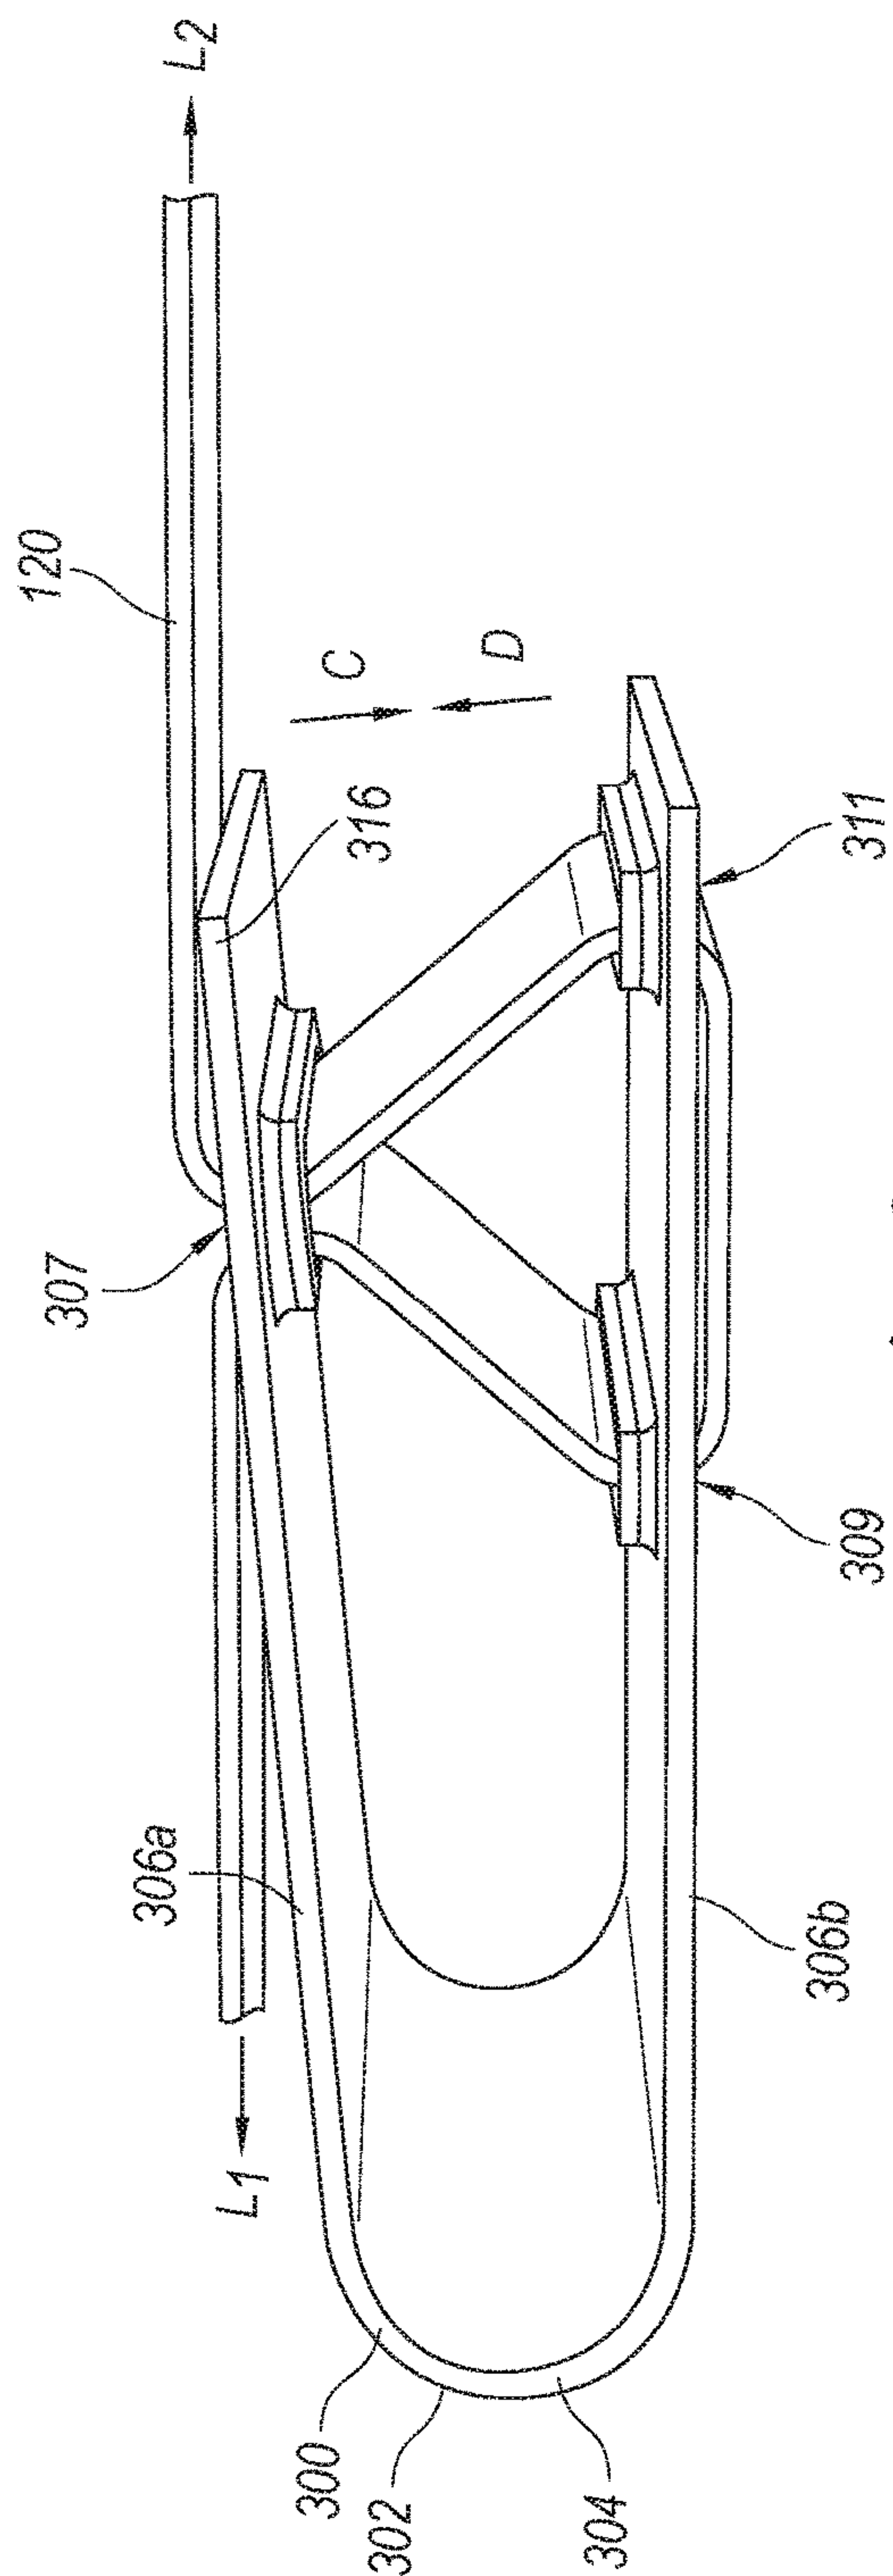


Fig. 3A

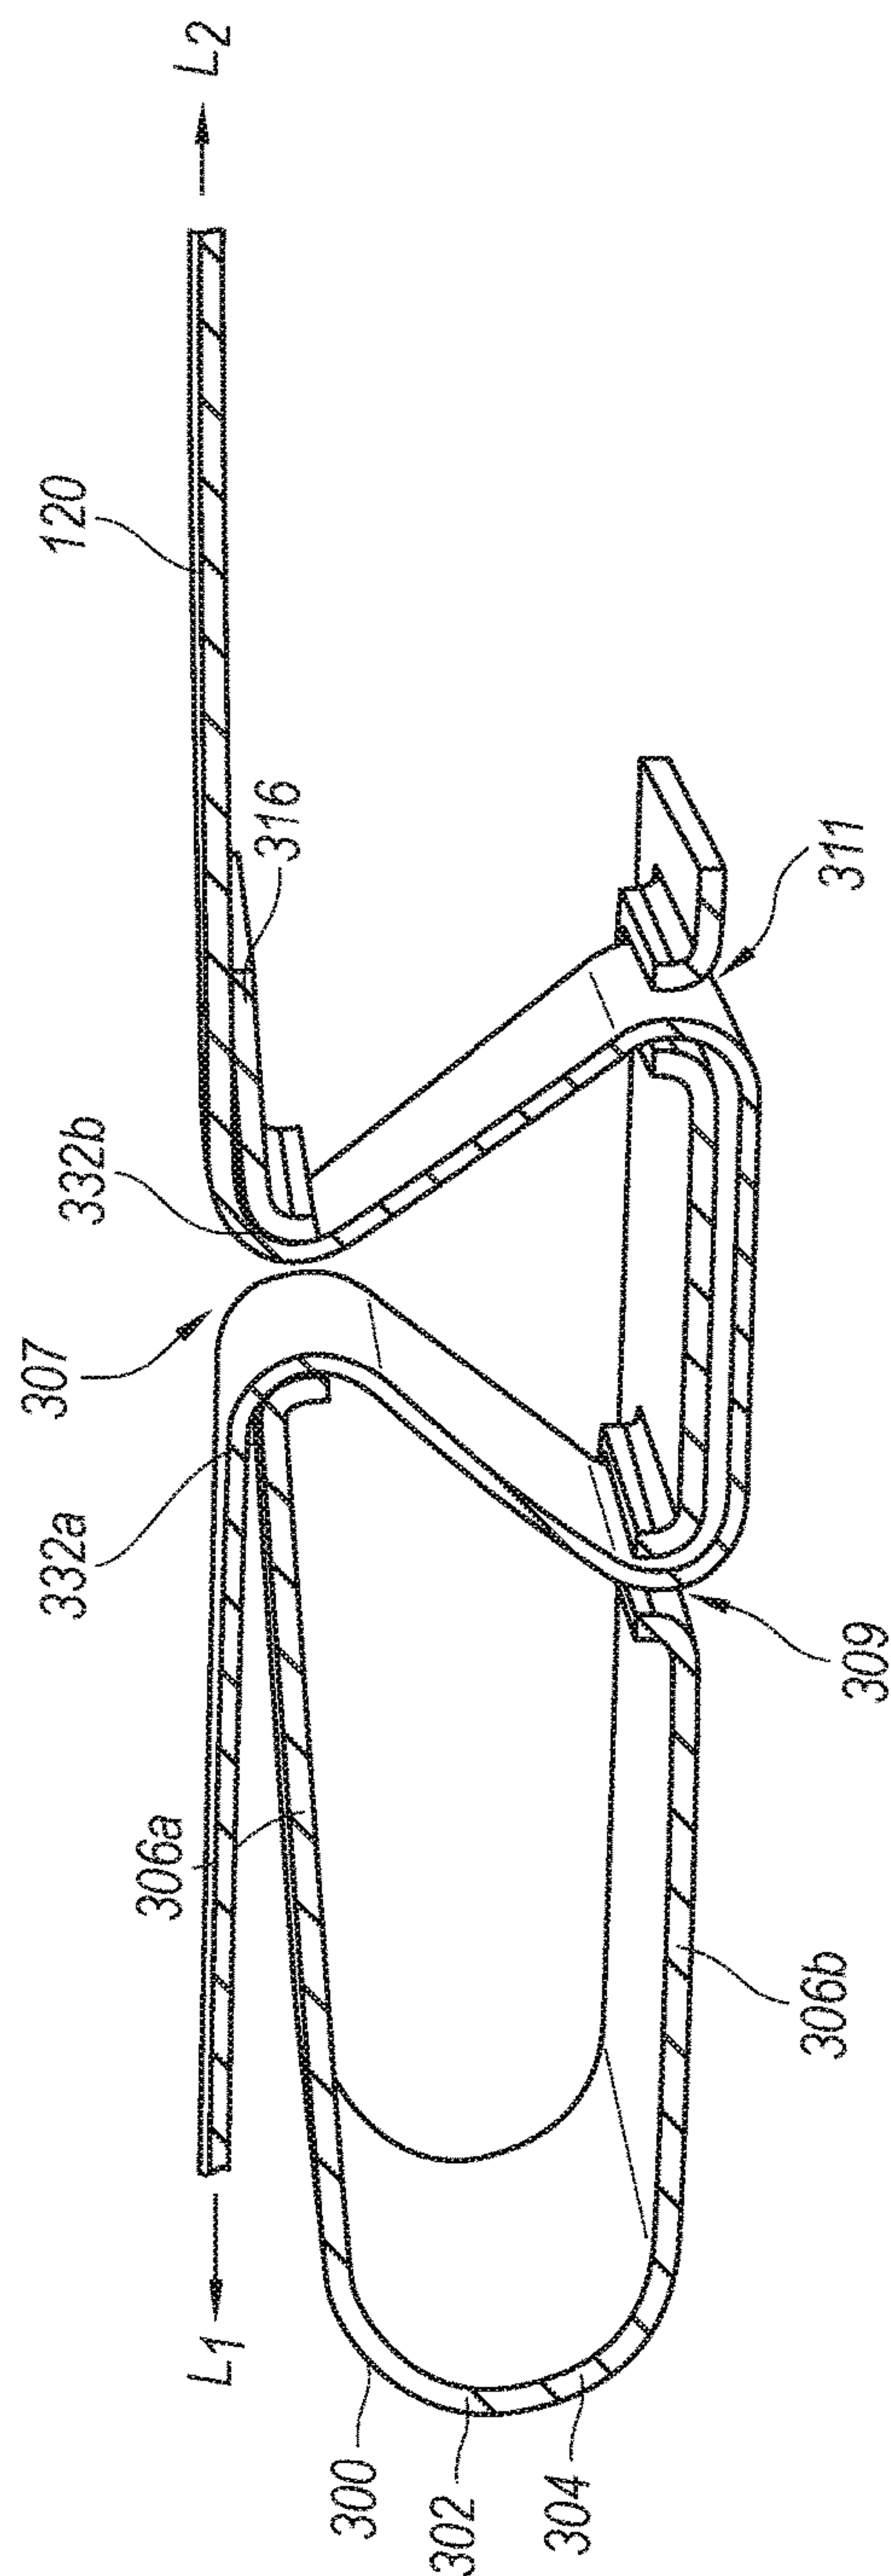


Fig. 3B

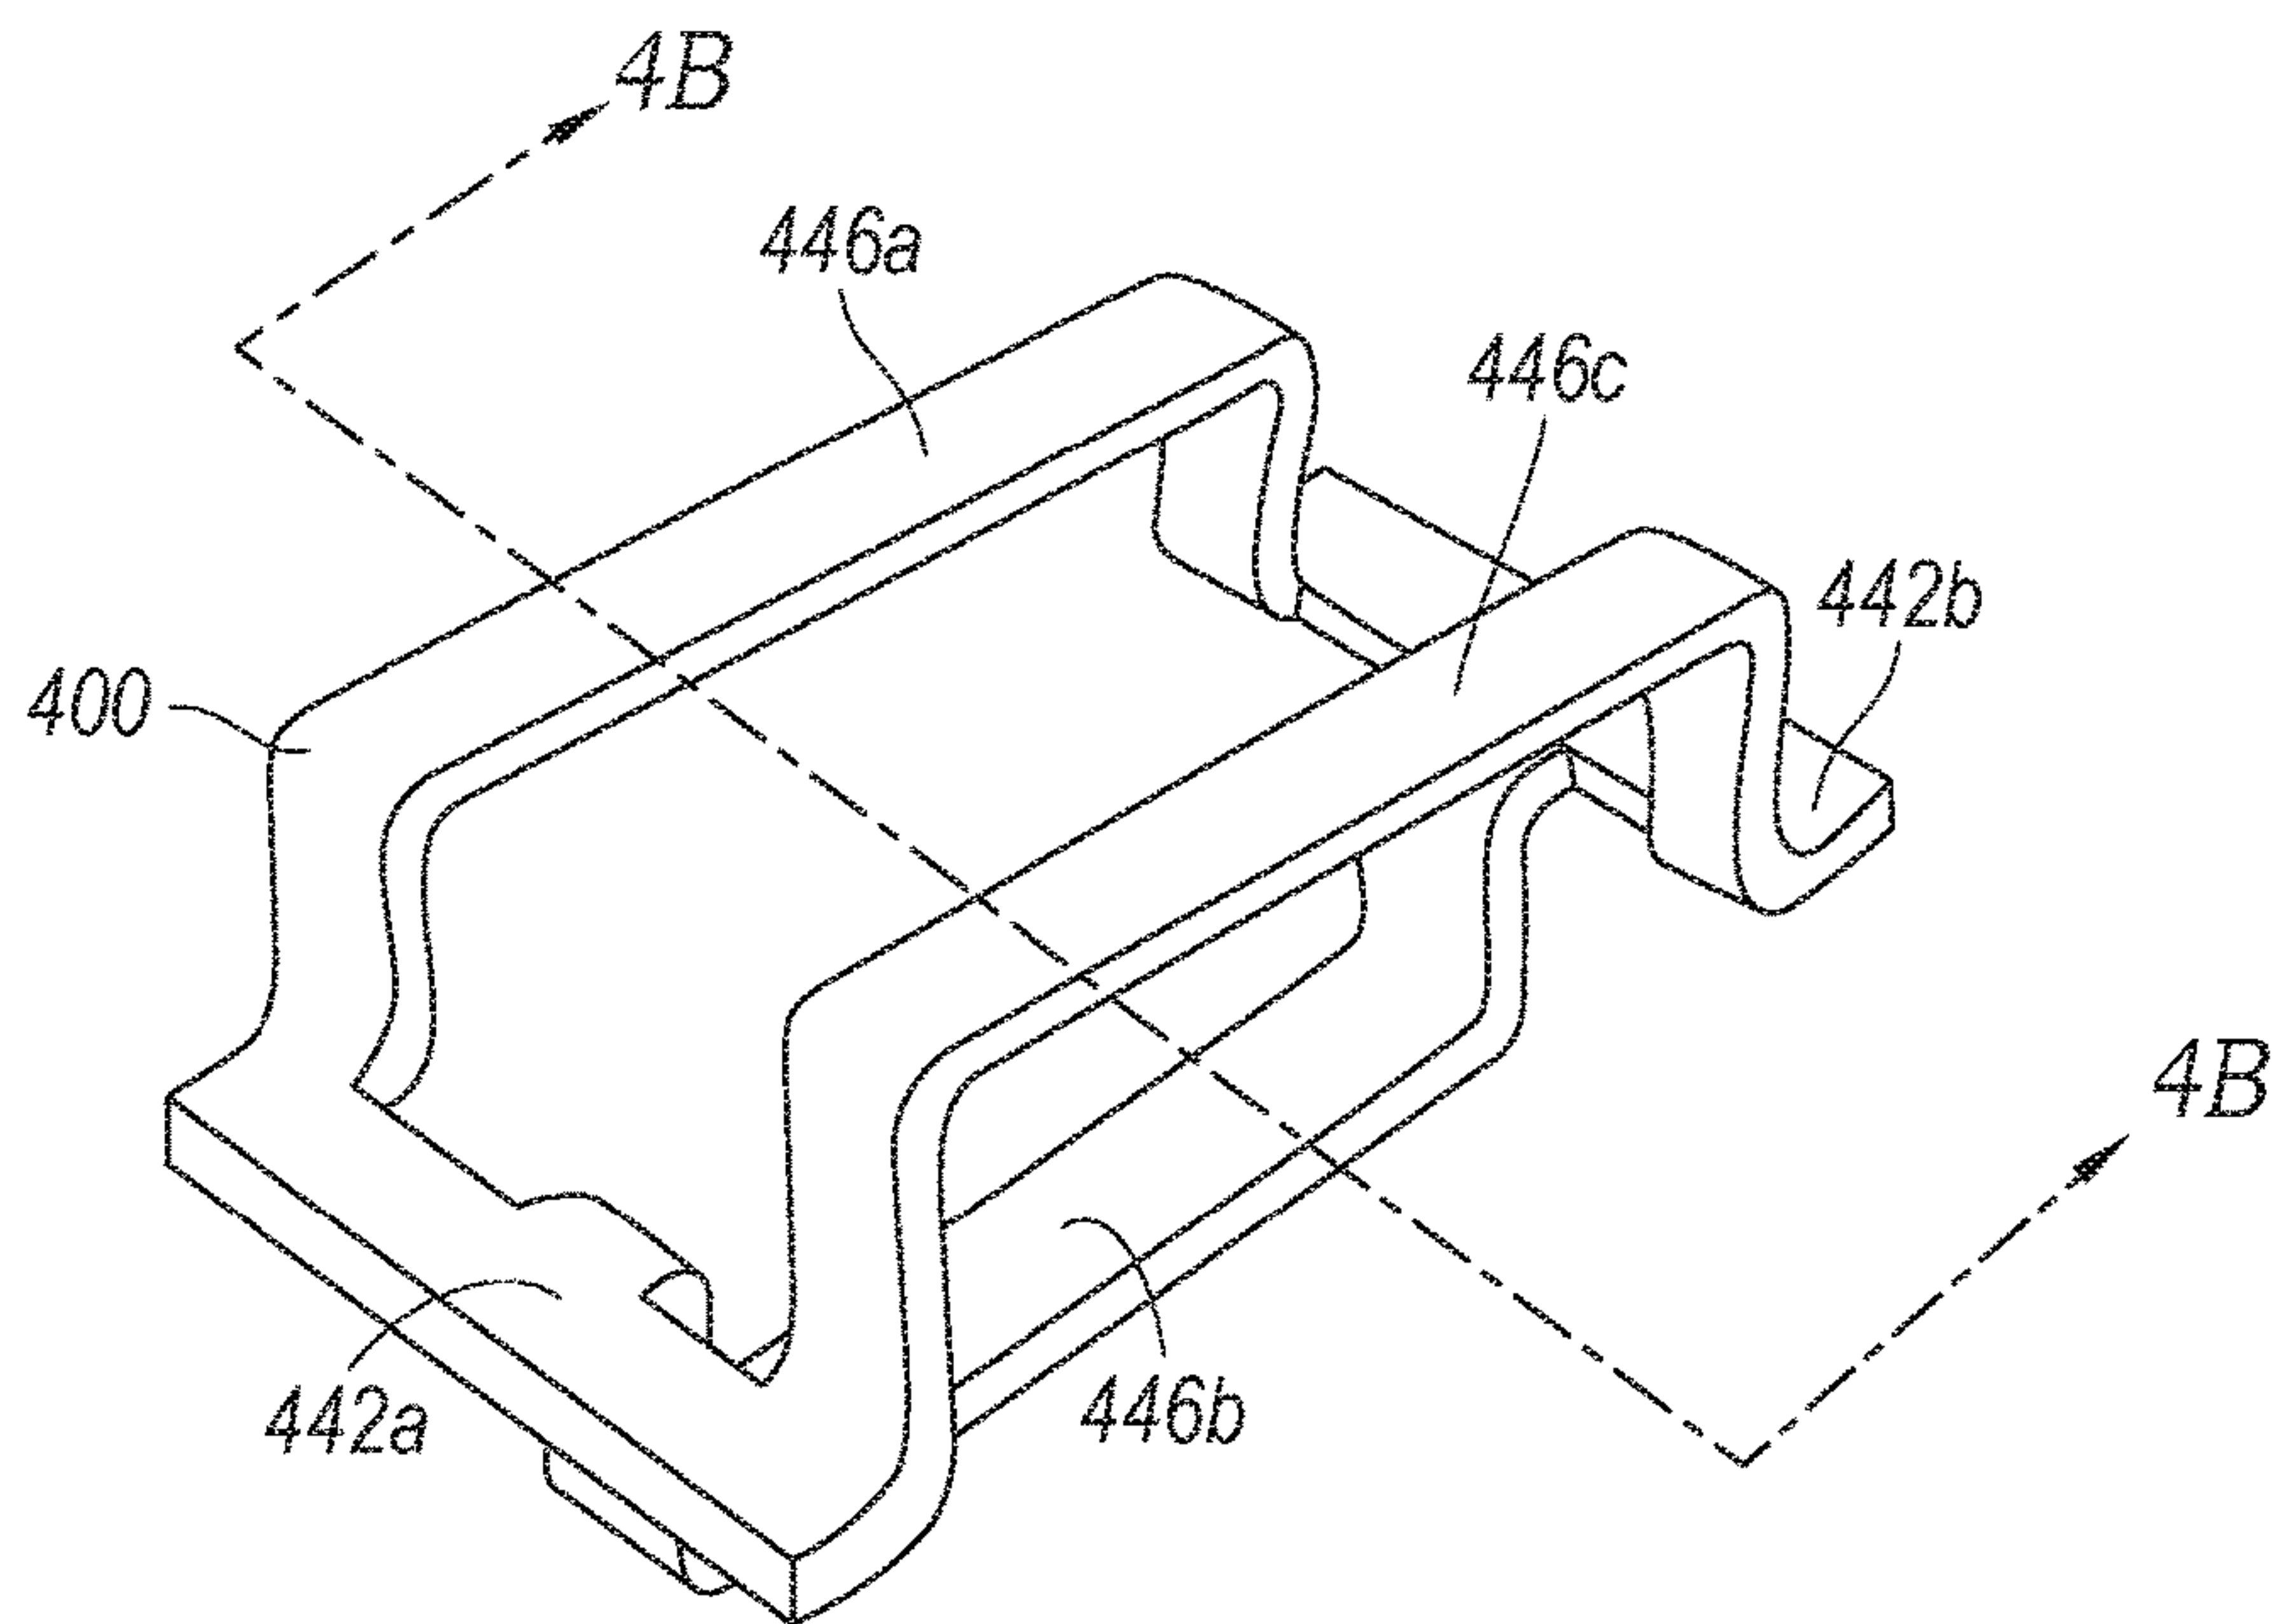


Fig. 4A

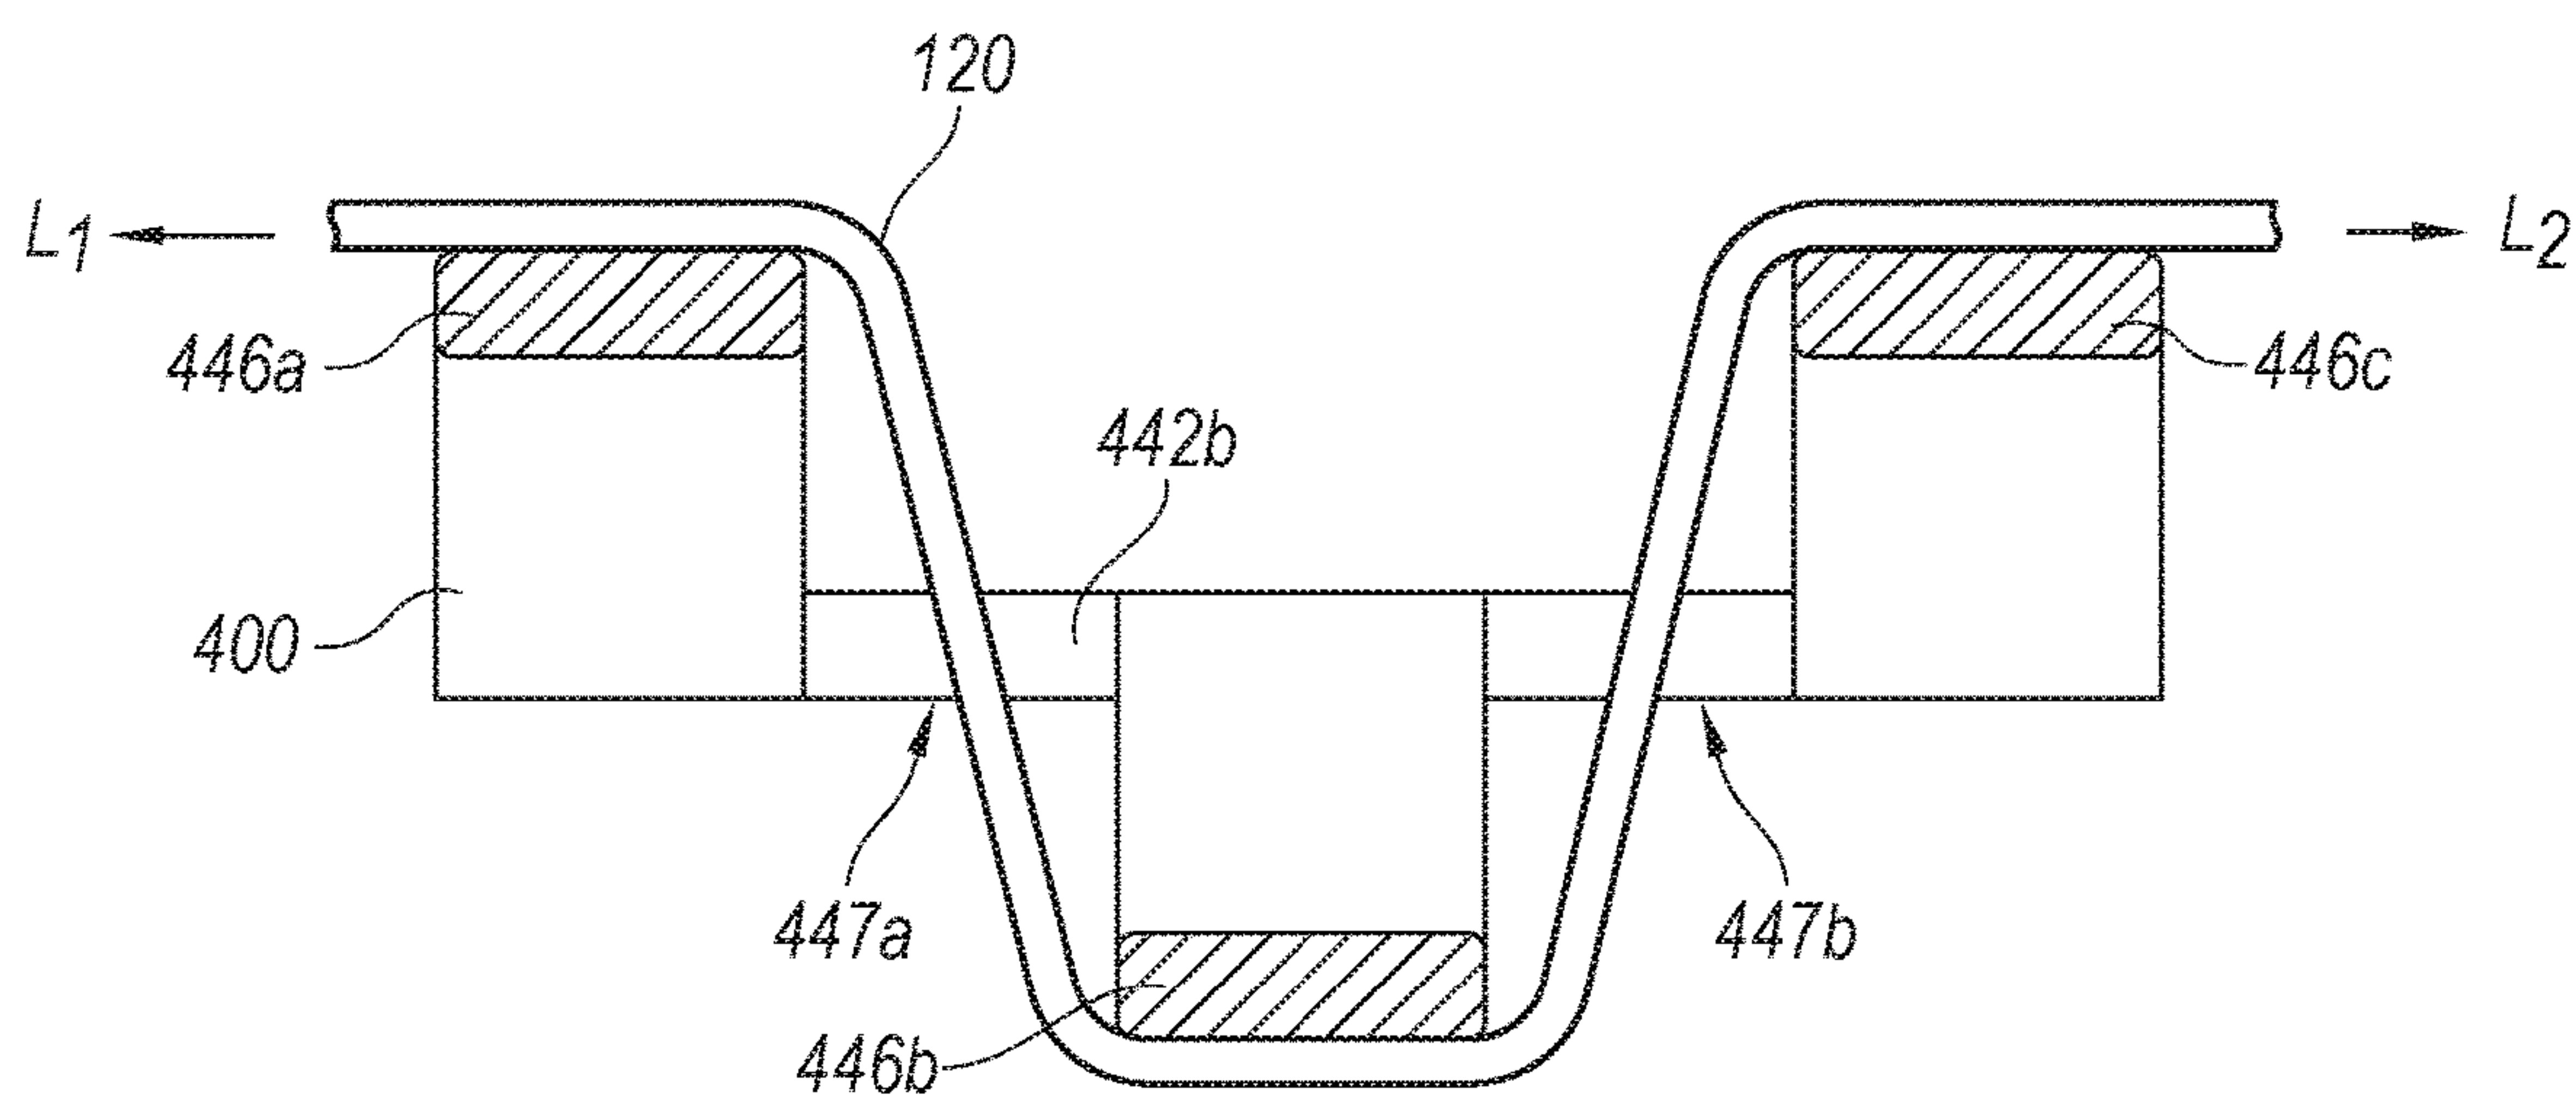


Fig. 4B

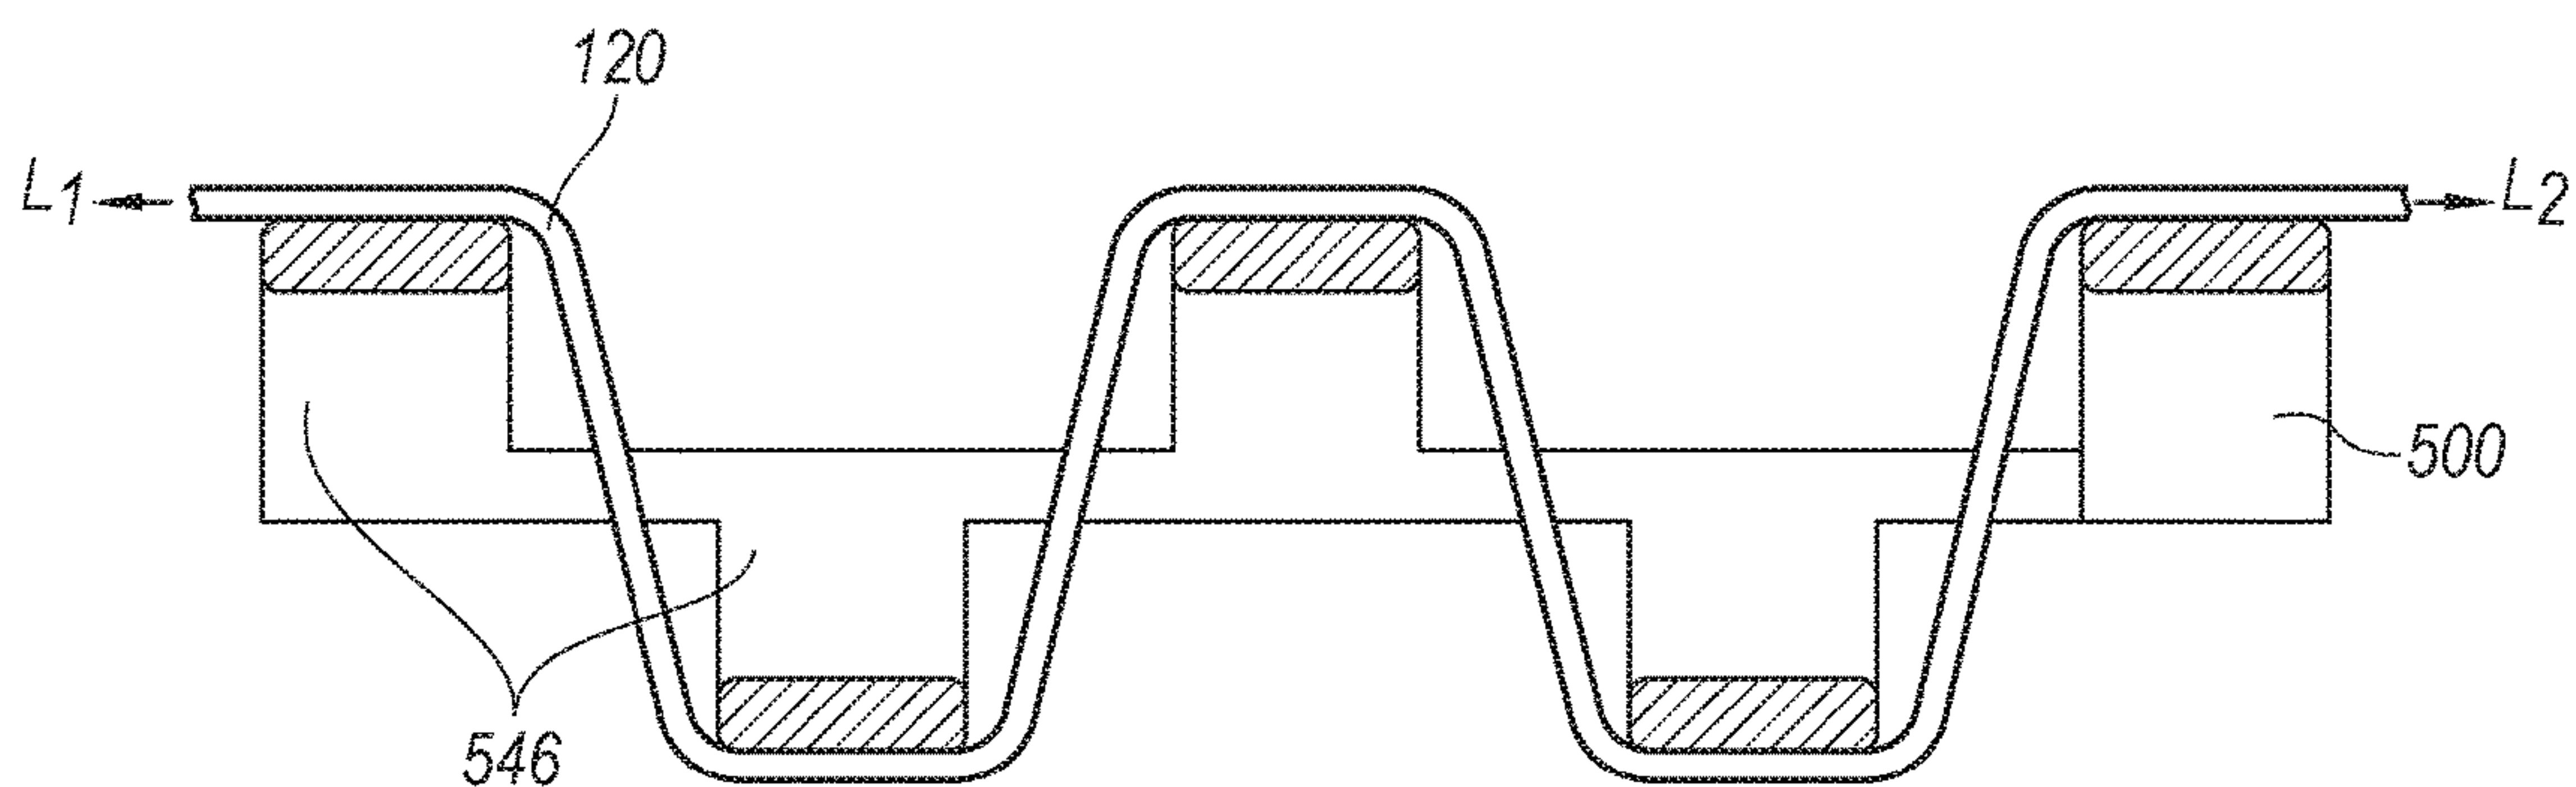


Fig. 5

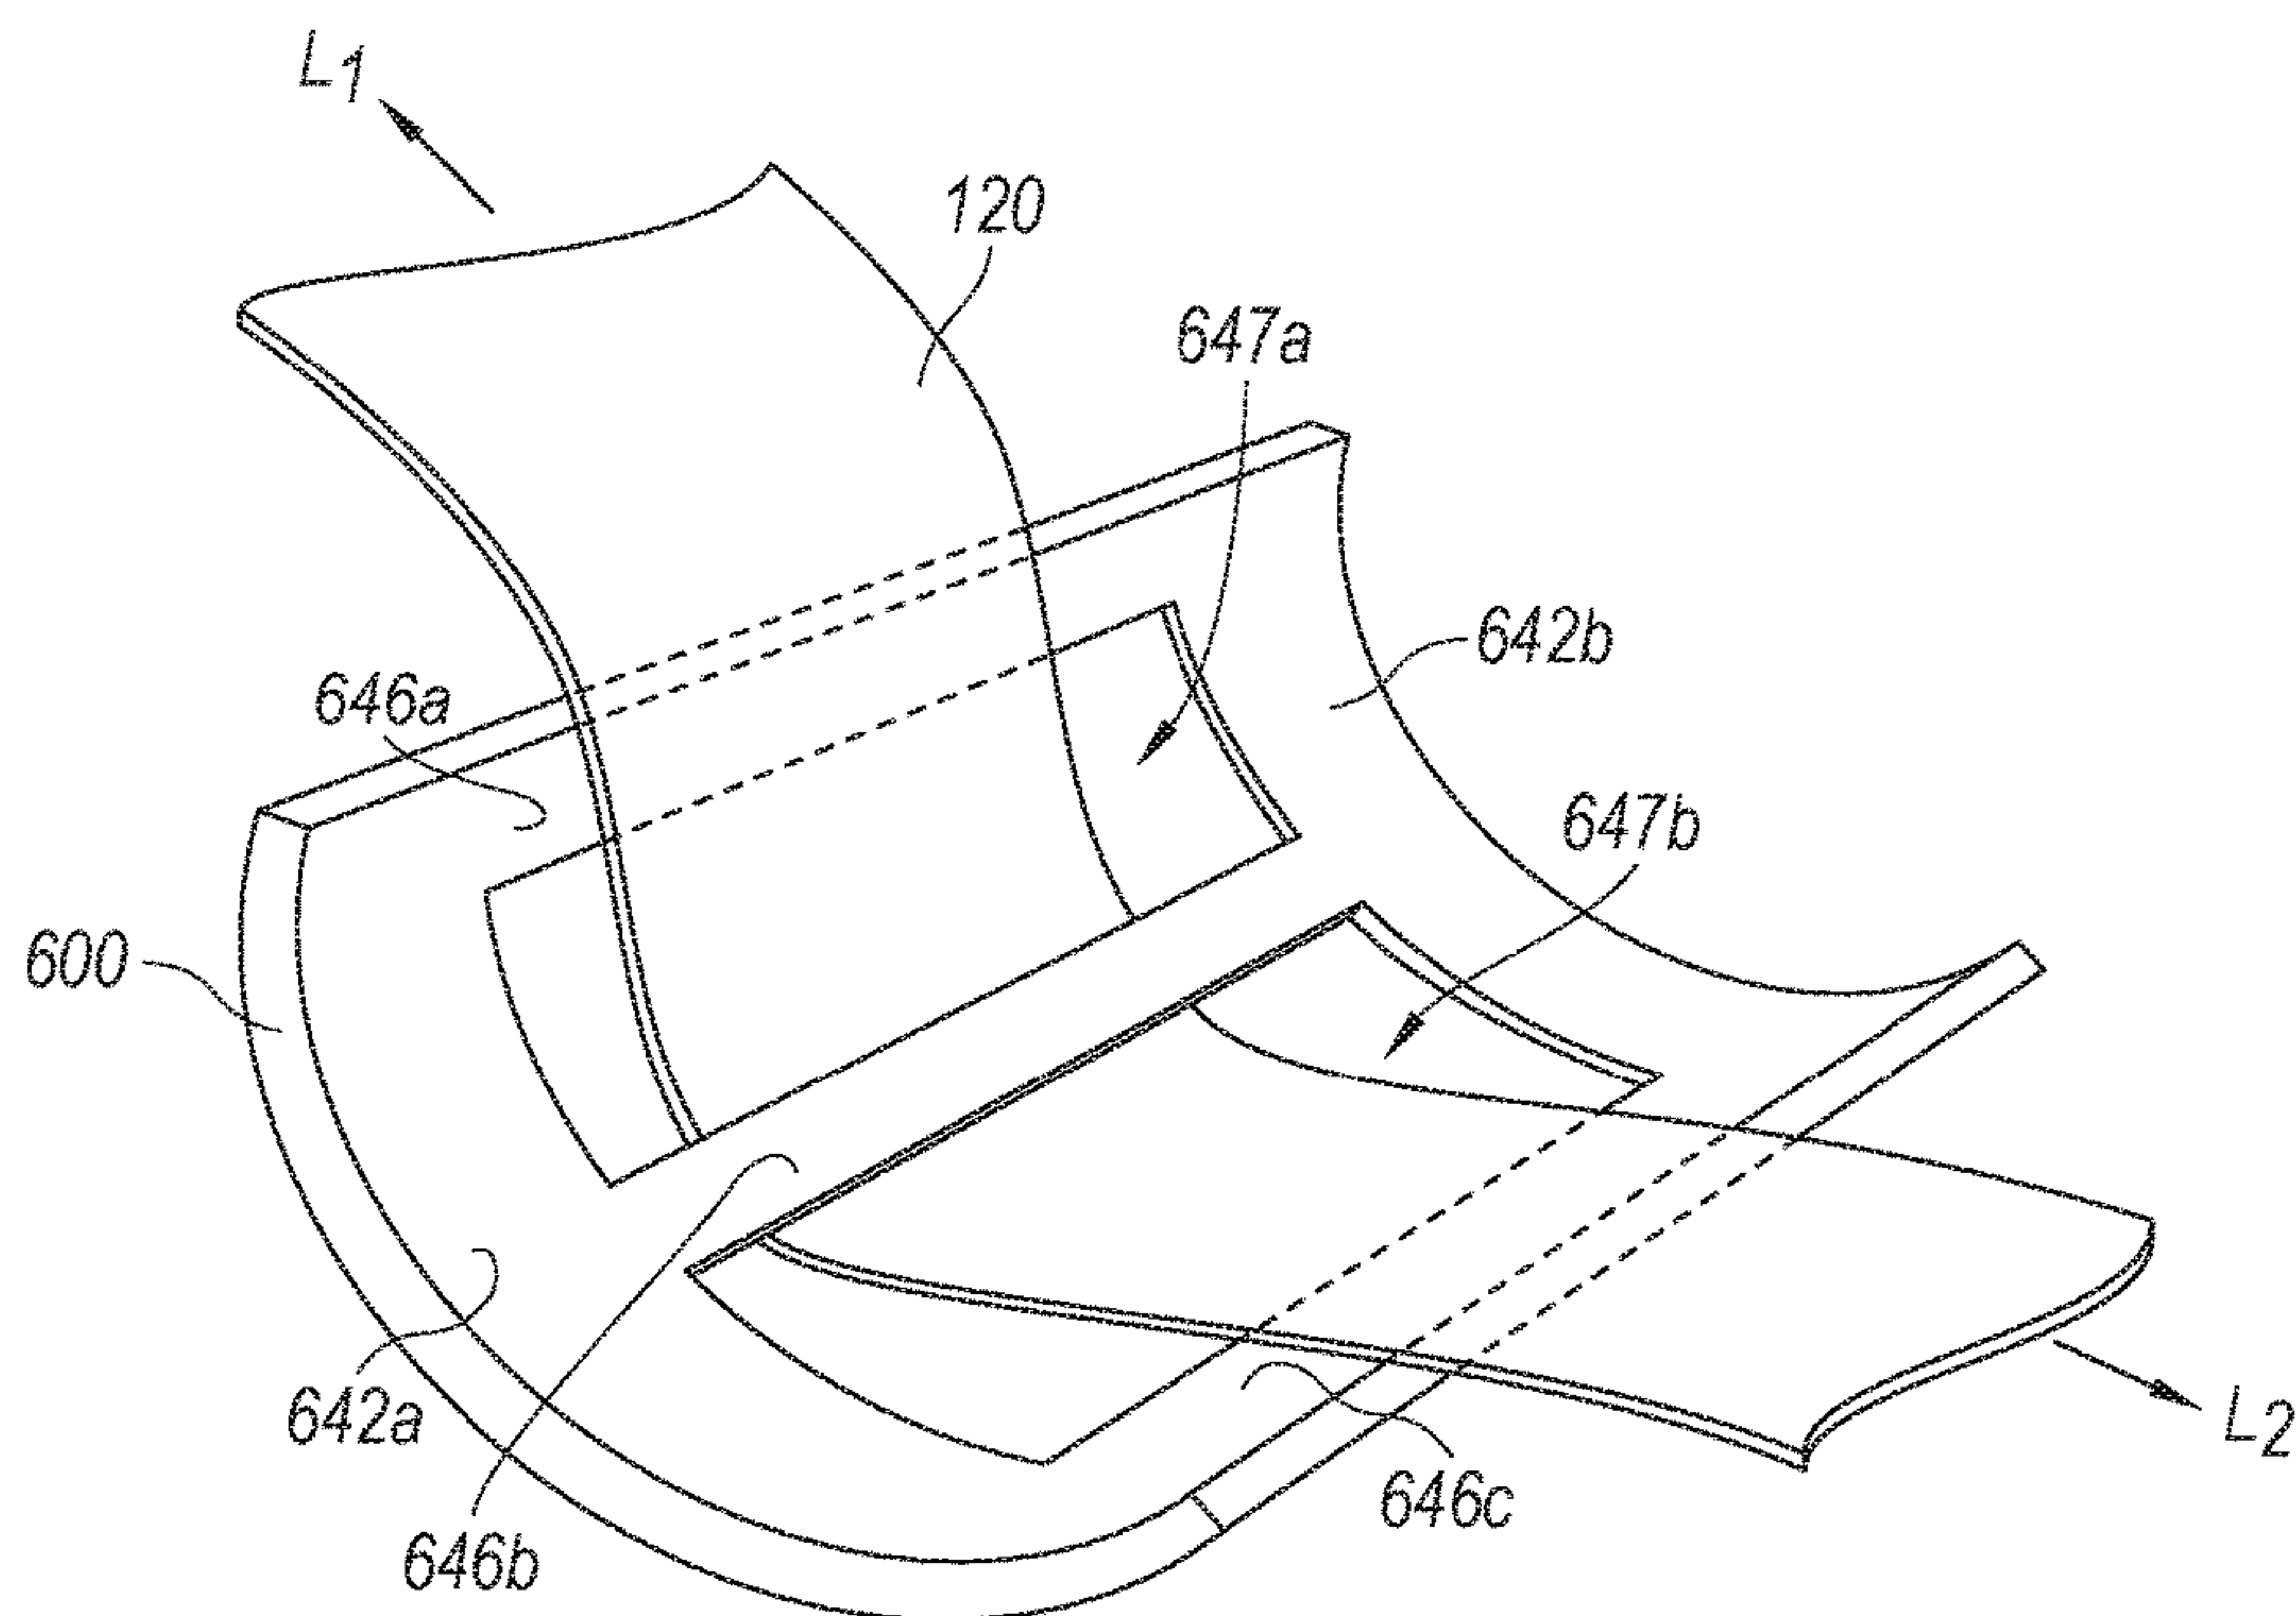


Fig. 6

ENERGY ABSORBING DEVICES FOR USE WITH WEBS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 62/652,670, titled “ENERGY ABSORBING DEVICES FOR USE WITH WEBS,” and filed Apr. 4, 2018, the disclosure of which is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure is generally directed to energy absorbing devices for use with seat belts and other restraint system webs.

BACKGROUND

[0003] Many types of personal restraint systems are used in automobiles, utility task vehicles (UTVs), and other vehicles. Small children, for example, are typically secured in a portable child seat that can be mounted to a passenger seat in an automobile or other vehicle. The child seat can be secured to the passenger seat by attaching one or more straps, belts, etc., (e.g., webs) from the child seat to corresponding anchor points in the vehicle, and then adjusting the tension in the webs to securely hold the child seat in place. During a crash or other significant dynamic event, substantial loads can be applied to the webs as the vehicle rapidly decelerates. Some webs are made of a material that stretches slightly and can absorb some energy during a crash, but the anchor points in the vehicle are generally rigid and offer little energy absorption. As a result, significant shock loads can be transmitted to the child seat during a crash.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Many aspects of the present disclosure can be better understood with reference to the following drawings. The components in the drawings are not necessarily to scale. Instead, emphasis is placed on clearly illustrating the principles of the present technology.

[0005] FIGS. 1A and 1B are isometric views of an energy absorbing device in a first position and a second position, respectively, configured in accordance with an embodiment of the present of the technology.

[0006] FIG. 2 is a side view of a child seat secured to a vehicle seat with a restraint system having an energy absorbing device configured in accordance with an embodiment of the present technology.

[0007] FIGS. 3A and 3B are isometric and isometric cross-sectional views, respectively, of an energy absorbing device configured in accordance with another embodiment of the present technology.

[0008] FIGS. 4A and 4B are isometric and side cross-sectional views, respectively, of an energy absorbing device configured in accordance with a further embodiment of the present technology.

[0009] FIG. 5 is a side cross-sectional view of an energy absorbing device configured in accordance with yet another embodiment of the present technology.

[0010] FIG. 6 is an isometric view of an energy absorbing device configured in accordance with a further embodiment of the present technology.

DETAILED DESCRIPTION

[0011] The following disclosure describes various embodiments of devices for absorbing energy transmitted by seat belts or other webs. For example, some embodiments of the present technology are directed to an energy absorbing device having a generally U-shaped body with first and second leg portions. A web, such as a web that securely attaches a child seat to an anchor point in a vehicle, can be threaded through the device by passing the web through apertures in the first and second leg portions. Upon application of a load to the web (e.g., during a crash), the first and second leg portions deflect and absorb a portion of the energy transmitted by the web to thereby reduce the shock on the child in the child seat.

[0012] Certain details are set forth in the following description and in FIGS. 1A-6 to provide a thorough understanding of various embodiments of the present technology. In other instances, well-known structures, materials, operations and/or systems often associated with webs, web adjusters, and other personal restraint system hardware are not shown or described in detail in the following disclosure to avoid unnecessarily obscuring the description of the various embodiments of the present technology. Those of ordinary skill in the art will recognize, however, that the present technology can be practiced without one or more of the details set forth herein, or with other structures, methods, components, and so forth.

[0013] The terminology used below is to be interpreted in its broadest reasonable manner, even though it is being used in conjunction with a detailed description of certain examples of embodiments of the technology. Indeed, certain terms may even be emphasized below; however, any terminology intended to be interpreted in any restricted manner will be overtly and specifically defined as such in this Detailed Description section.

[0014] The accompanying Figures depict embodiments of the present technology and are not intended to be limiting of its scope. The sizes of various depicted elements are not necessarily drawn to scale, and these various elements may be arbitrarily enlarged to improve legibility. Component details may be abstracted in the Figures to exclude details such as position of components and certain precise connections between such components when such details are unnecessary for a complete understanding of how to make and use the present technology. Many of the details, dimensions, angles and other features shown in the Figures are merely illustrative of particular embodiments of the present technology. Accordingly, other embodiments can have other details, dimensions, angles and features without departing from the scope of the present technology. In addition, those of ordinary skill in the art will appreciate that further embodiments of the present technology can be practiced without several of the details described below.

[0015] FIGS. 1A and 1B are isometric views of an energy absorbing device 100 (“device 100”) in a first position (e.g., having a first shape) and a second position (e.g., having a second shape), respectively, configured in accordance with an embodiment of the present technology. Referring to FIG. 1A, the device 100 includes a generally V- or U-shaped body 102 having an outer surface 103 and an inner surface 105. The body 102 includes a base portion 104, a first leg portion 106a extending from one side of the base portion 104, and a second leg portion 106b extending from an opposite side of the base portion 104. In the illustrated embodiment, the

leg portions **106a, b** are generally planar and extend away from each other, defining an angle *A* therebetween. In other embodiments, the leg portions **106a, b** can be non-planar (e.g., curved) and/or the leg portions **106a, b** can extend generally toward or parallel to each other.

[0016] The first leg portion **106a** includes a first web aperture **107a** (e.g., a generally rectangular opening) that extends generally lengthwise across the first leg portion **106a** proximate to a distal end portion **116a** of the first leg portion **106a**. Similarly, the second leg portion **106b** includes a second web aperture **107b** that extends generally lengthwise across the second leg portion **106b** proximate to a distal end portion **116b** of the second leg portion **106b**. In other embodiments, the web apertures **107a, b** can have circular, square, rectangular, polygonal, irregular, or other shapes, and/or can be positioned differently on the leg portions **106a, b**.

[0017] The device **100** can be manufactured using suitable materials and methods known in the art. For example, in some embodiments, the device **100** can be formed from a suitable steel plate (e.g., a high-strength low-alloy (HSLA) steel) that is stamped and formed, and/or machined to shape. In other embodiments, the device **100** can be formed from composite materials or can be injection molded from a suitable plastic.

[0018] In another aspect of the illustrated embodiment, a web **120** can be inserted through the web apertures **107a, b** such that the web **120** extends around the distal end portions **116a, 116b** and around a portion of the outer surface **103** between the web apertures **107a, b**. The web **120** can be any type of web, strap, seat belt web, etc., well known in the art for use with seat belt and other restraint systems, and can be constructed of various suitable materials known in the art, such as woven nylon.

[0019] The device **100** can be used to absorb energy and reduce shock loads in a wide variety of applications. FIG. 2, for example, is a side view of a child seat **230** secured to a car seat **232** with a restraint system **250** that includes the device **100**. The device **100** can be easily installed onto pre-existing restraint systems. For example, the first web **120** can be threaded through the device **100** during installation of the child seat **230**. In the illustrated embodiment, an upper portion of the child seat **230** is securely attached to an upper anchor **234** in a vehicle by means of the web **120** (e.g., referred to here as the first web **120**) and a second web **225**. The first web **120** and the second web **225** are coupled together by a web adjuster **227** (e.g., a tilt-lock web adjuster, a push-button web adjuster, etc.) that is operable to adjust the tension in the first and second webs **120, 225**. Although the device **100** is coupled to the first web **120**, in other embodiments the device **100** can be coupled to the second web **225**, and/or the restraint system **250** can include multiple devices **100** (e.g., one coupled to the first web **120** and another coupled to the second web **225**). Additionally, in other embodiments the web adjuster **227** can be omitted.

[0020] In other embodiments, the upper portion of the child seat **230** and/or other portions of the child seat **230** can be secured to a lower anchor **238** by means of the first and second webs **120, 225** as illustrated in phantom lines in FIG. 2. A lower portion of the child seat **230** can be secured to the car seat **232** with additional restraints, such as a restraint **236** of a type well known to those of ordinary skill in the art. In some embodiments, the device **100** may be employed in a LATCH (Lower Anchor and Tethers for Children) system to

attach a child restraint system to a vehicle seat. In other embodiments, the device **100** can be used with various other web arrangements without departing from the scope of the present technology.

[0021] Referring to FIGS. 1A-2 together, when a load is applied to the web **120** (e.g., during a crash or other rapid deceleration event), the device **100** deflects from the first position shown in FIG. 1A to the second position shown in FIG. 1B in response to the load to absorb energy transmitted by the web **120**. More specifically, when a tension load (indicated by arrows L_1 and L_2) is applied to the web **120**, the tension force in the web **120** is transmitted to the device **100** via the distal end portions **116a, b** and pulls the leg portions **106a, b** away from each other as shown in FIG. 1B. That is, the load applied to the web **120** causes the leg portions **106a, b** to move outwardly about the base portion **104**, increasing the angle *A*. In some embodiments, the angle *A* can be less than about 90° in the first position, and between about 90° - 180° in the second position. Accordingly, in the second position, the device **100** has a greater lateral spacing between the distal end portions **116a, b** and less vertical height (between the base portion **104** and the distal end portions **116a, b**) than in the first position. The deflection, or the deflection and deformation, of the device **100** absorbs at least a portion of the shock energy during a rapid deceleration event that would otherwise be transmitted to the child seat **230** via the web **120**—thereby reducing the shock exerted on the child in the seat **230**.

[0022] In some embodiments, the device **100** fully or partially returns to the first position from the second position after the load in the web **120** is relieved. In other embodiments, the device **100** is configured to at least partially deform and not return fully to the first position after sustaining the load in the web **120**. In some embodiments, the device **100** is configured to deflect and deform when the load applied to the web **120** is greater than or equal to a particular load value or “design-level load.” For example, the device **100** can be configured to deflect and deform at a design-level load of between about 500-1500 lbf. In some embodiments, the device **100** deforms and does not return fully to the first position to provide a visual indication that the device **100** has been subjected to a design level load and may need inspection and/or replacement. More generally, the shape and size of the leg portions **106a, b**, the material type and mechanical properties, and the thickness of the body **102** can be selected to provide a desired level of deflection/deformation of the device **100** at any of a variety of design-level loads. For example, increasing the thickness of the body **102**, decreasing the length of the leg portions **106a, b**, or increasing the modulus of elasticity of the material used to form the body **102** can provide a corresponding increase in the design-level load at which the device **100** deflects and deforms. These and other features can be selected and modified to match or correspond to a calculated design-level load. In some embodiments, for example, the body **102** can have a thickness of between about 0.5-2.0 mm and/or the leg portions **106a, b** can have a length of between about 5-30 mm.

[0023] In another aspect of the illustrated embodiment, the device **100** is configured so that it does not directly carry the entire load applied to the web **120**. Accordingly, the device **100** does not need to be designed to carry the relatively high loads that are carried by the web **120** (e.g., from about 2000-2500 lbf), and can have a design-level load signifi-

cantly less than the maximum load-carrying capacity of the web 120. In some embodiments, once the device 100 has partially or fully deformed (to, e.g., the second position), the web 120 carries all, or a substantial portion, of the applied load. In other embodiments, the device 100 can be configured to carry the entire load in the web 120. For example, in some embodiments the web 120 can comprise separate first and second webs that can be securely attached to, for example, the distal end portions 116a, b of the device 100—rather than inserted through the web apertures 107a, b.

[0024] FIGS. 3A and 3B are isometric and isometric cross-sectional views, respectively, of an energy absorbing device 300 (“device 300”) configured in accordance with another embodiment of the present technology. Referring to FIGS. 3A and 3B together, the device 300 includes some features that are generally similar in structure and function to features of the device 100 described in detail above with reference to FIGS. 1A-2. For example, the device 300 includes a generally U-shaped body 302 having a base portion 304, and first and second leg portions 306a, b, respectively, extending from opposite sides of the base portion 304. In the illustrated embodiment, however, the base portion 304 has a generally curved shape and the device 300 includes three web apertures. More specifically, the first leg portion 306a includes a first web aperture 307 that extends generally lengthwise across a distal end portion of the first leg portion 306a and includes a first edge 332a and an opposite second edge 332b. The second leg portion 308 includes a second web aperture 309 spaced apart from a third web aperture 311. The web 120 can be inserted through the first, second, and third web apertures 307, 309, and 311 such that the web 120 extends generally (a) through the first web aperture 307 around the first edge 332a, (b) along an outer surface of the second leg portion 308 between the second and third web apertures 309, 311, and (c) back through the first web aperture 307 around the second edge 332b.

[0025] When a tension load is applied to the web 120, the tension force in the web pulls the leg portions 306a, b toward each other, which absorbs and dissipates the shock energy transmitted by the web 120. Specifically, when a tension load (represented by the arrows L_1 and L_2) is applied to the web 120 (via, e.g., a crash or other rapid deceleration of the vehicle), the tension in the web 120 pulls the leg portions 306a, b inwardly toward each other in the directions indicated by arrows C and D, respectively (FIG. 3A). In some embodiments, the leg portions 306a, b are configured to deform and remain pinched inwardly after the load (e.g., a design-level load) is applied to the web 120 to provide a visual indication that the device has been subjected to a design level load and may need inspection and/or replacement. In other embodiments, then leg portions 306a, b are configured to deflect inward when the load is applied to the web 120 and return outwardly away from each other thereafter.

[0026] Although FIGS. 1A-3B illustrate embodiments of energy absorbing devices having leg portions configured to move away from and/or toward each other to absorb and/or dissipate a shock load applied to a web, energy absorbing devices according to the present technology can have other shapes, configurations, etc. For example, FIGS. 4A and 4B are isometric and side cross-sectional views, respectively, of an energy absorbing device 400 (“device 400”) configured in accordance with another embodiment of the present technology. Referring to FIGS. 4A and 4B together, the

device 400 includes generally planar first and second side portions 442a, b, respectively, and first, second, and third cross members 446a, b, c, respectively, extending between the side portions 442a, b. The side portions 442a, b and the cross members 446a, b, c together define first and second web apertures 447a, b, respectively. In the illustrated embodiment, the first and third cross members 446a, 446c extend generally above the side portions 442a, b while the second cross member 446b extends generally below the side portions 442a, b.

[0027] As shown in FIG. 4B, the web 120 can be inserted through the web apertures 447a, b such that the web 120 extends over the first cross member 446a, through the first web aperture 447a, under the second cross member 446b, through the second web aperture 447b, and over the third cross member 446c. When a tension load is applied to the web 120, the device 400 deflects and deforms such that the cross members 446a, b, c move generally inwardly and absorb a portion of the energy transmitted by the web 120. More specifically, when a tension load (represented by the arrows L_1 and L_2) is applied to the web 120, the tension force pulls the cross members 446a, b, c inwardly toward a plane coplanar with the side portions 442a, b. In some embodiments, the tension force can further cause the cross members 446a, b, c to at least partially deflect laterally such that the device 400 has a greater width (e.g., in a direction parallel to the cross members 446a, b, c) after the load is applied to the web 120.

[0028] In some embodiments, energy absorbing devices configured in accordance with the present technology can include more or fewer than the three cross members illustrated in FIGS. 4A and 4B. For example, FIG. 5 is a side cross-sectional view of an energy absorbing device 500 (“device 500”) having five cross members 546 that are generally similar to the cross members 446a, b, c described in detail above with reference to FIGS. 4A and 4B. In some embodiments, the device 500 has a larger design-level load than the device 400 since it has a greater number of cross members for absorbing a tension load applied to the web 120.

[0029] FIG. 6 is an isometric view of an energy absorbing device 600 (“device 600”) configured in accordance with another embodiment of the present technology. The device 600 includes some features that are generally similar to features of the devices 400 and 500 described in detail above with reference to FIGS. 4A-5. For example, the device 600 includes first, second, and third cross members 646a, b, c, respectively, extending between first and second side portions 642a, b, respectively. The side portions 642a, b and the cross members 646a, b, c together define first and second web apertures 647a, b, respectively. In the illustrated embodiment, however, the device 600 has a generally curved shape in which the side portions 642a, b are generally rounded (e.g., broadly U-shaped) and the cross members 646a, b, c are generally linear or planar.

[0030] The web 120 can be inserted through the web apertures 647a, b and around the second cross member 646b as shown. When a tension load is applied to the web 120, the device 600 deflects from its generally curved shape to a flatter shape (e.g., having a greater radius of curvature and/or no curvature) and absorbs and/or dissipates the shock energy transmitted by the web 120. More specifically, when a tension load (represented by the arrows L_1 and L_2) is applied to the web 120, the tension force is transmitted to the

device **600** via the cross members **646a, b, c** and causes the side portions **642a, b** to generally straighten relative to their shape before the load was applied to the web **120**. Thus, in some embodiments, the device **600** has a greater length after the load is applied to the web **120**.

[0031] The foregoing description of embodiments of the technology is not intended to be exhaustive or to limit the disclosed technology to the precise embodiments disclosed. While specific embodiments of, and examples for, the present technology are described herein for illustrative purposes, various equivalent modifications are possible within the scope of the present technology, as those of ordinary skill in the relevant art will recognize. For example, although the energy absorbing devices illustrated in FIGS. 1A-6 are described in the context of webs used in child seats, those of ordinary skill in the art will understand that the energy absorbing devices described herein can be utilized in a wide variety of other applications utilizing webs as restraints or tethers. For example, the energy absorbing devices of the present technology could be advantageously used in fall-arrest harness systems (e.g., employed at a construction site), recreational utility vehicles (RUVs), automobiles, etc. Accordingly, the energy absorbing devices described herein are not limited to use in any particular restraint system, but can be used with a wide-variety of such systems without departing from the present disclosure. Further, various aspects of the technology described herein can be combined to provide yet other embodiments.

[0032] Unless the context clearly requires otherwise, throughout the description and the claims, the words “comprise,” “comprising,” and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of “including, but not limited to.” Words using the singular or plural number also include the plural or singular number respectively. Additionally, the words “herein,” “above,” “below,” and words of similar import, when used in this application, shall refer to this application as a whole and not to any particular portions of this application. When the claims use the word “or” in reference to a list of two or more items, that word covers all of the following interpretations of the word: any of the items in the list, all of the items in the list, and any combination of the items in the list.

[0033] From the foregoing, it will be appreciated that specific embodiments of the disclosed technology have been described herein for purposes of illustration, but that various modifications may be made without deviating from the present technology. Certain aspects of the disclosure described in the context of particular embodiments may be combined or eliminated in other embodiments. Further, while advantages associated with certain embodiments of the disclosed technology have been described in the context of those embodiments, other embodiments may also exhibit such advantages, and not all embodiments need necessarily exhibit such advantages to fall within the scope of the disclosed technology. Accordingly, the disclosure and associated technology can encompass other embodiments not expressly shown or described herein.

[0034] In general, the terms used in the following claims should not be construed to limit the present technology to the specific embodiments disclosed in the specification, unless the above-detailed description explicitly defines such terms. Accordingly, the actual scope of the present technology

encompasses the disclosed embodiments and all equivalent ways of practicing or implementing the disclosure under the claims.

I/We claim:

1. An energy absorbing device for use with an occupant restraint system having a restraint web, the energy absorbing device comprising:

a body having a first leg portion and a second leg portion spaced apart from the first leg portion,

wherein the first leg portion includes a first web aperture configured to receive the restraint web there-through,

wherein the second leg portion includes a second web aperture configured to receive the restraint web therethrough, and

wherein, when a tension load is applied to the restraint web, the first leg portion is configured to move relative to the second leg portion to absorb energy in the restraint web.

2. The energy absorbing device of claim 1 wherein the first leg portion is configured to move away from the second leg portion when the tension load is applied to the restraint web.

3. The energy absorbing device of claim 1 wherein the first leg portion is configured to move toward the second leg portion when the tension load is applied to the restraint web.

4. The energy absorbing device of claim 3 wherein the second leg portion further includes a third web aperture configured to receive the restraint web therethrough.

5. The energy absorbing device of claim 4 wherein the energy absorbing device is configured to receive the restraint web routed (a) through the first web aperture, (b) through the second web aperture, (c) through the third web aperture, and (d) back through the first web aperture.

6. The energy absorbing device of claim 1 wherein the leg portions define an angle therebetween, and wherein the angle increases when the tension load is applied to the restraint web.

7. The energy absorbing device of claim 1 wherein the leg portions define an angle therebetween, and wherein the angle decreases when the tension load is applied to the restraint web.

8. The energy absorbing device of claim 1 wherein the leg portions are configured to move from a first position to a second position different than the first position when the tension load is applied to the restraint web, and wherein the leg portions are configured to elastically return to the first position from the second position after the tension load is applied to the restraint web.

9. The energy absorbing device of claim 1 wherein the leg portions are configured to move from a first position to a second position different than the first position when the tension load is applied to the restraint web, and wherein the leg portions are configured to at least partially deform and not fully return to the first position after the tension load is applied to the restraint web.

10. The energy absorbing device of claim 1 wherein the first web aperture is a generally rectangular opening that extends generally lengthwise across the first leg portion proximate to a distal end portion of the first leg portion, and wherein the second web aperture is a generally rectangular opening that extends generally lengthwise across the second leg portion proximate to a distal end portion of the second leg portion.

11. The energy absorbing device of claim **1**, further comprising the restraint web.

12. An energy absorbing device for use with an occupant restraint system having a restraint web, the energy absorbing device comprising:

a body including a first side portion, a second side portion, and a plurality of cross members extending between the first and second side portions,

wherein the first and second side portions and the cross members together define (a) a first web aperture configured to receive the restraint web therethrough and (b) a second web aperture configured to receive the restraint web therethrough, and

wherein, when a tension load is applied to the restraint web, at least two of the cross members are configured to move inwardly toward each other to absorb energy in the restraint web.

13. The energy absorbing device of claim **12** wherein the first and second side portions are generally coplanar along a plane, and wherein the cross members are configured to move inwardly toward the plane when the tension load is applied to the restraint web.

14. The energy absorbing device of claim **12** wherein the plurality of cross members include—

a first cross member extending between the first and second side portions and offset from the first and second side portions in a first direction;

a second cross member extending between the first and second side portions and offset from the first and second side portions in the first direction; and

a third cross member extending between the first and second side portions and offset from the first and second side portions in a second direction, opposite to the first direction.

15. The energy absorbing device of claim **14** wherein the first and second cross members are configured to receive the restraint web thereover, and wherein the third cross member is configured to receive the restraint web thereunder.

16. The energy absorbing device of claim **12** wherein the plurality of cross members includes at least three cross members.

17. The energy absorbing device of claim **12**, further comprising the restraint web.

18. An energy absorbing device for use with an occupant restraint system having a restraint web, the energy absorbing device comprising:

a body including a first side portion, a second side portion, and a plurality of cross members extending between the first and second side portions,

wherein the first and second side portions and the cross members together define (a) a first web aperture configured to receive the restraint web therethrough and (b) a second web aperture configured to receive the restraint web therethrough,

wherein the first and second side portions each have a generally curved shape, and

wherein, when a tension load is applied to the restraint web, the first and second side portions are configured to deflect from the generally curved shape to a flatter shape to absorb energy in the restraint web.

19. The energy absorbing device of claim **18** wherein each of the cross members are generally planar.

20. The energy absorbing device of claim **18** wherein the first and second side portions are configured to at least partially deform and not fully return to the generally curved shape after the tension load is applied to the restraint web.

* * * * *