



(19) **United States**

(12) **Patent Application Publication**

Droppo et al.

(10) **Pub. No.: US 2003/0201674 A1**

(43) **Pub. Date: Oct. 30, 2003**

(54) **DC TO DC CONVERTER AND POWER MANAGEMENT SYSTEM**

(60) Provisional application No. 60/221,596, filed on Jul. 28, 2000.

(75) Inventors: **Gerald W. Droppo**, Richland, WA (US); **Lawrence A. Schienbein**, Kennewick, WA (US); **Brent Earle Harris**, Calgary (CA); **Donald J. Hammerstrom**, W. Richland, WA (US)

Publication Classification

(51) **Int. Cl.⁷** **H02J 1/00; H02J 3/00**
(52) **U.S. Cl.** **307/82**

Correspondence Address:
MARGER JOHNSON & McCOLLOM, P.C.
1030 S.W. Morrison Street
Portland, OR 97205 (US)

(57) **ABSTRACT**

A DC to DC Converter includes an electrical circuit that allows batteries and other electrical energy storage devices to be charged from or to discharge to a variable voltage DC bus. This electrical circuit also enables seamless integration with other energy storage devices and/or DC power sources, such as fuel cells, to provide DC power for a Power Management System. A Power Management System preferably provides both full power source management and power conditioning. The Power Management System is able to manage power flow to and from multiple, isolated power sources and energy storage devices to deliver high quality alternating current ("AC") power to a load.


(73) Assignee: **International Power System, Inc.**, Calgary (CA)

(21) Appl. No.: **10/447,168**

(22) Filed: **May 27, 2003**

Related U.S. Application Data

(63) Continuation of application No. 09/917,256, filed on Jul. 27, 2001.

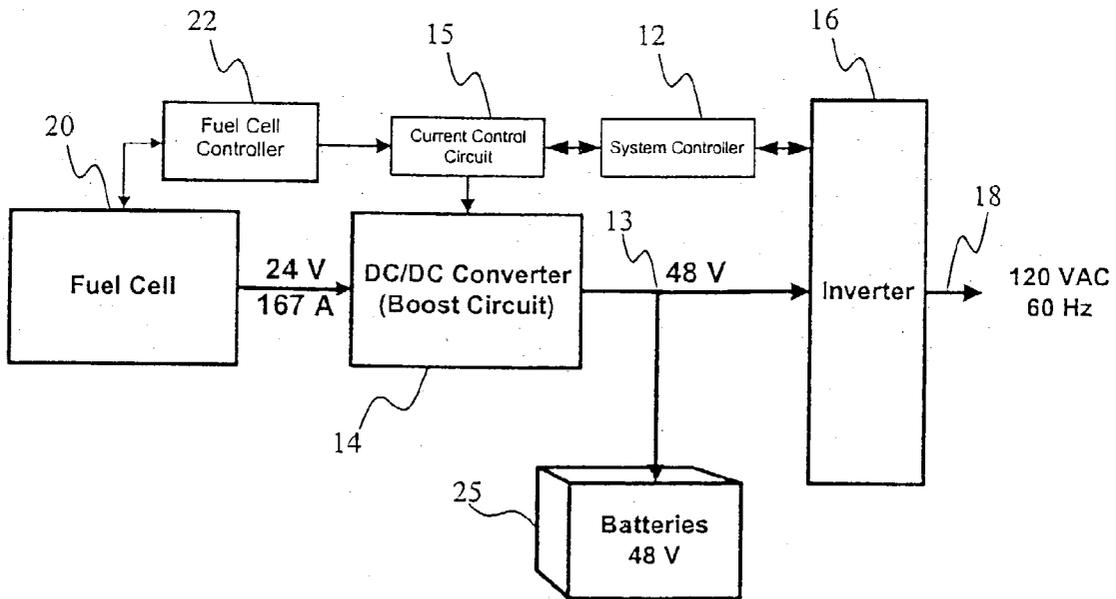

Series Power Manager Configuration

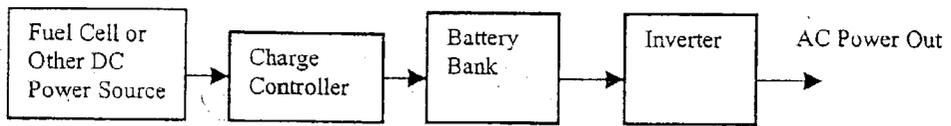


FIG. 1

(Prior Art)

Typical "Battery Node" Hybrid Power Configuration

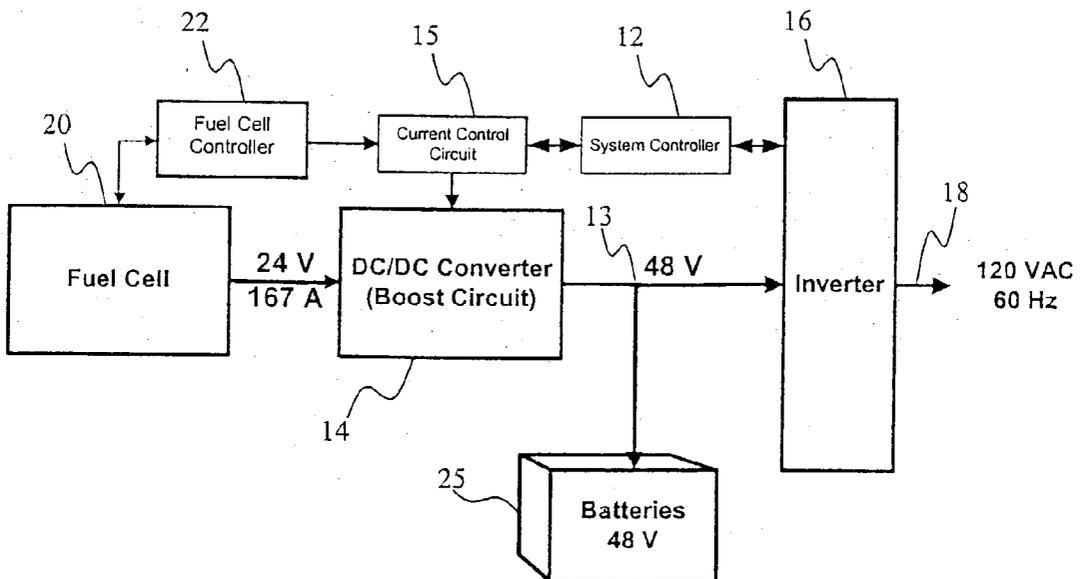


FIG. 2

Series Power Manager Configuration

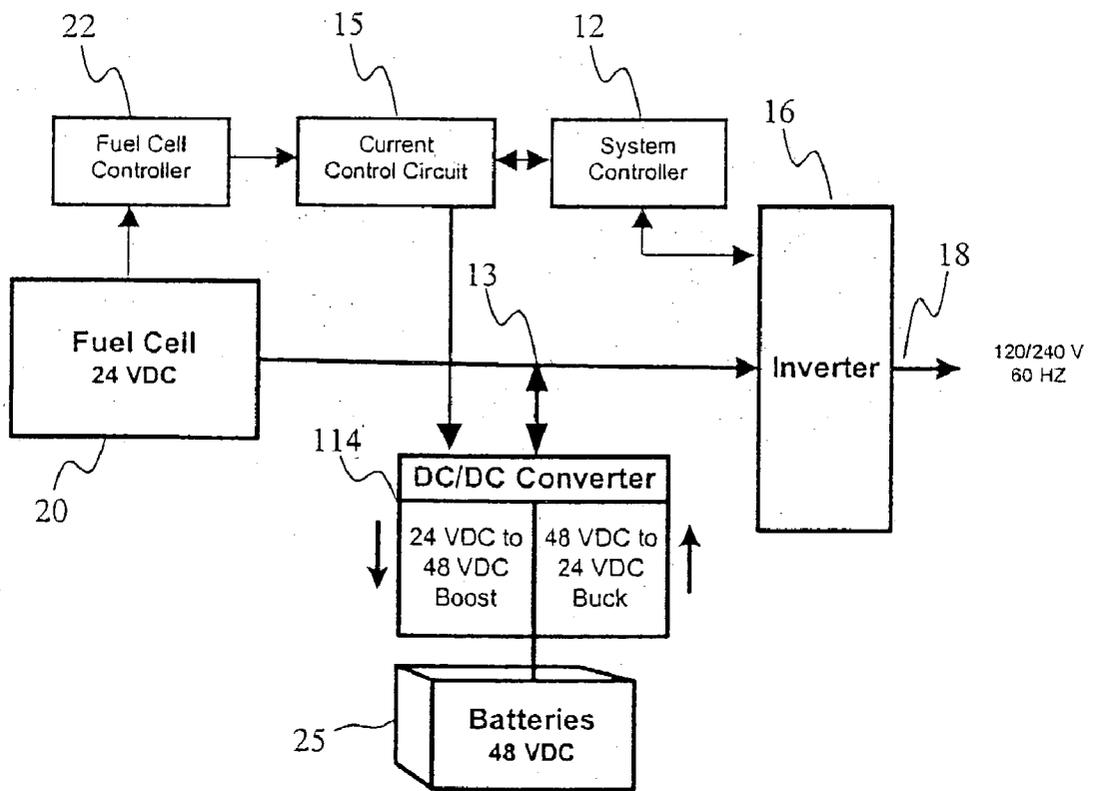


FIG. 3

Parallel Power Manager Configuration

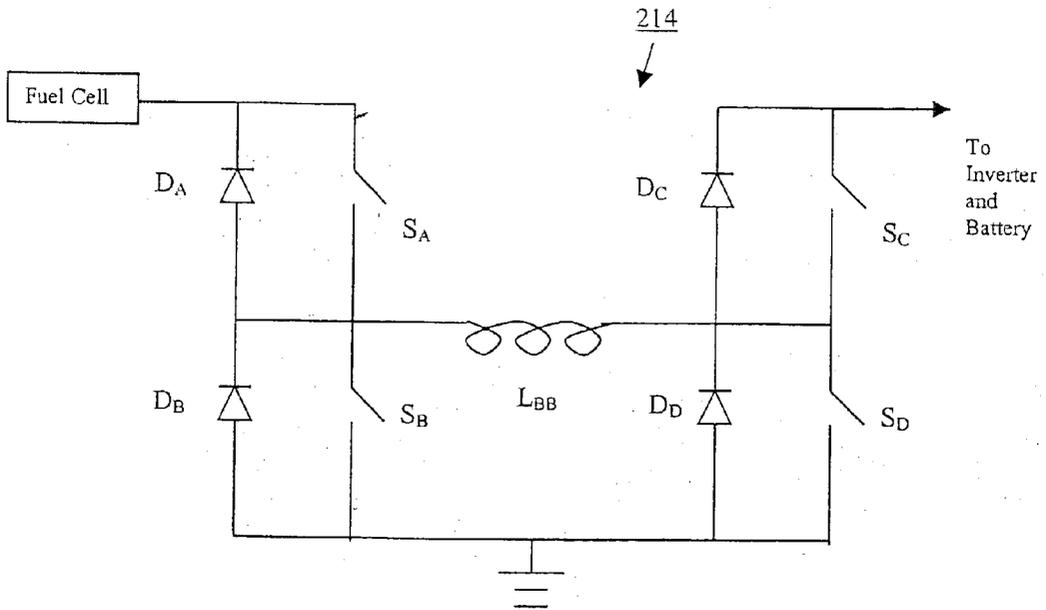


FIG. 4

Circuit A - Buck and Boost DC to DC Converter

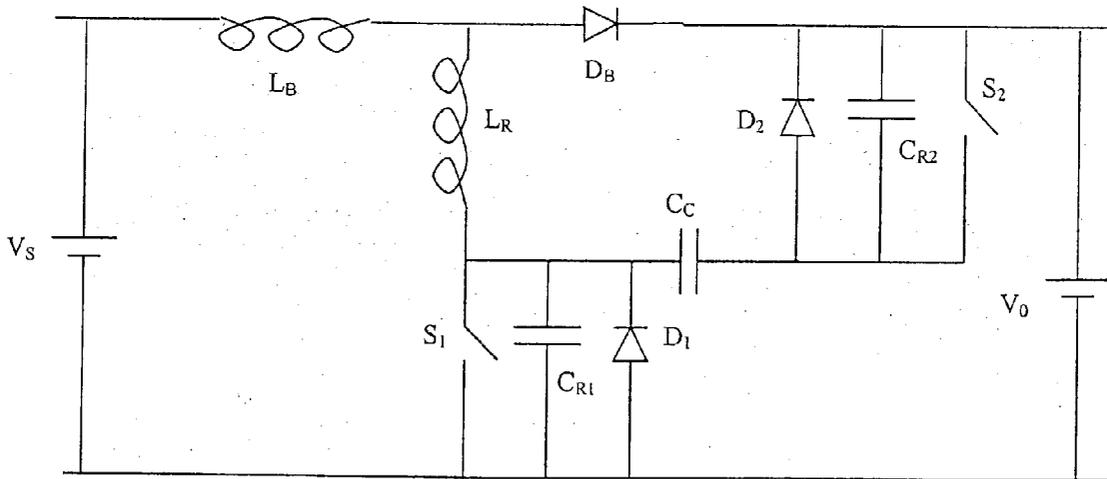


FIG. 5A

Circuit B - Boost DC to DC Converter with Capacitor C_{R2}

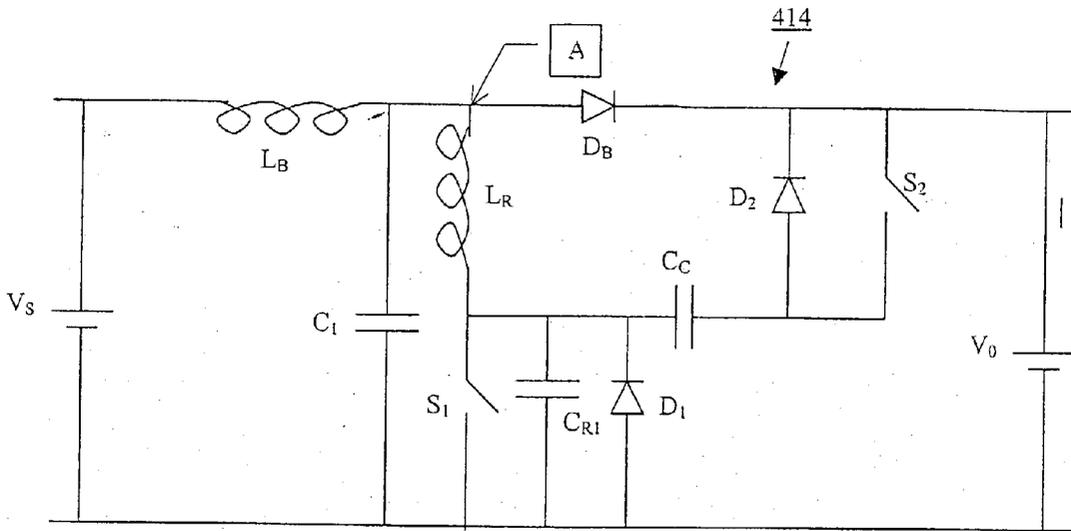


FIG. 5B

Circuit C - Boost DC to DC Converter with Capacitor C_1

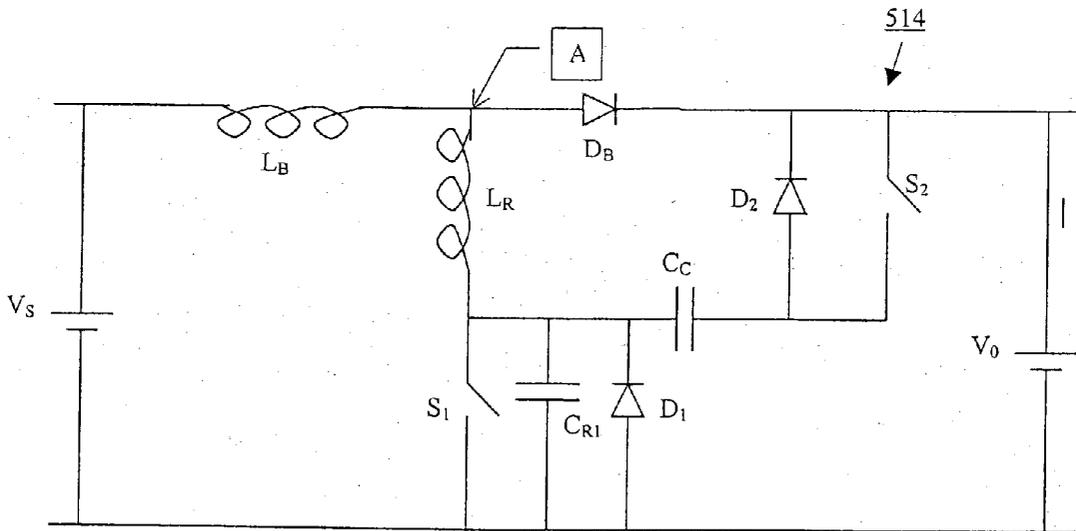


FIG. 5C

(Prior Art)

Duarte and Barbi - Boost DC to DC Converter

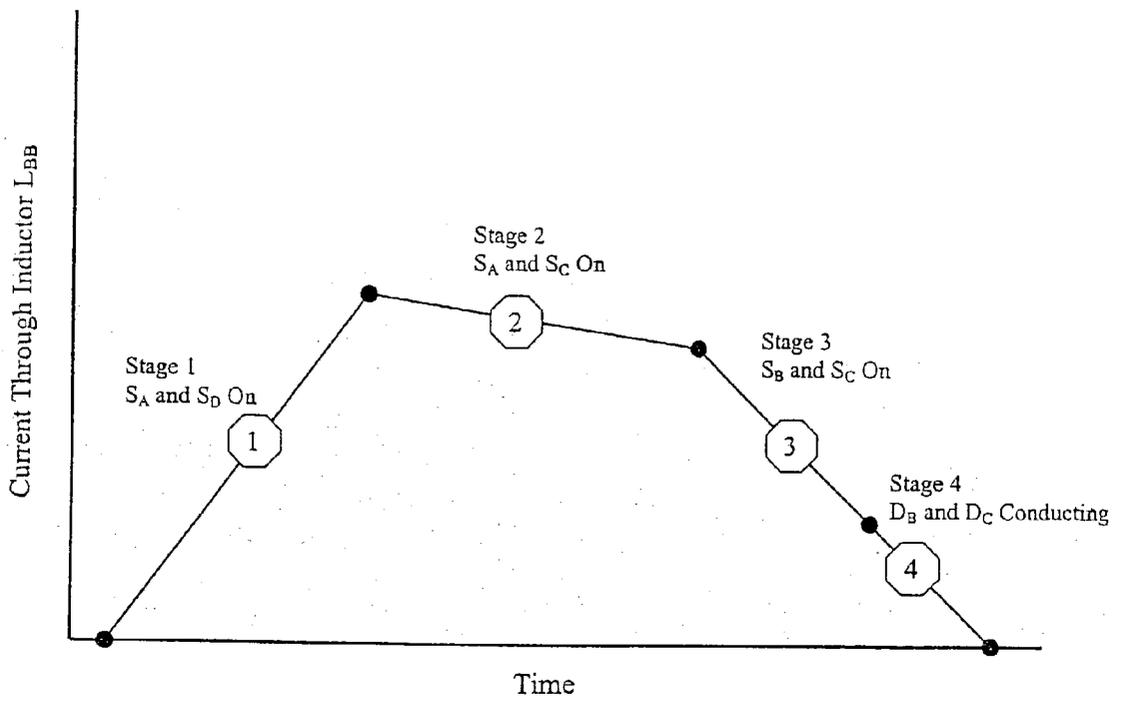


FIG. 6

Current Through Inductor L_{BB} Versus Time for One Cycle of Operation of Circuit A

DC TO DC CONVERTER AND POWER MANAGEMENT SYSTEM

[0001] This application is a continuation of U.S. patent application Ser. No. 09/917,256, filed on Jul. 27, 2001, which is incorporated herein in its entirety by reference.

BACKGROUND OF THE INVENTION

[0002] This invention relates generally to systems and methods for managing direct current ("DC") power. More specifically, this invention relates to DC to DC converters and power management systems and methods.

[0003] Today, most hybrid fuel cell/battery power systems, and other systems having multiple DC power sources and batteries, are arranged as shown in FIG. 1. The arrangement shown in FIG. 1 is referred to as the "battery node" approach because the power must pass through the battery output node at the battery voltage. This configuration therefore uses battery charge controller and inverter ratings that match the capacity of the fuel cell.

[0004] Conventional DC to DC converters and their associated inverter designs and products have several deficiencies that make it difficult for them to adequately meet the functional requirements of modern hybrid power systems. These conventional converters are therefore unable to satisfy the needs of a typical energy user. Among other problems, conventional DC to DC converters typically generate electrical noise and high frequency ripple currents on the input (source) and output (load) busses. They are also poorly adapted to the regulation of input current. Furthermore, they typically exhibit energy conversion efficiencies of only around 80-90%.

SUMMARY OF THE INVENTION

[0005] According to one aspect of this invention, a DC to DC Buck and Boost Converter is provided. "Buck" power conversion refers to a reduction in voltage from an input side of the converter to an output side. "Boost" power conversion refers to an increase in voltage from the input side to the output side of the converter. According to one embodiment of this invention, the Buck and Boost DC to DC Converter includes an electrical circuit that allows batteries and other electrical energy storage devices to be charged from or to discharge to a variable voltage DC bus. This electrical circuit can also be configured to enable seamless integration with other energy storage devices and/or DC power sources, such as fuel cells, to provide DC power for a Power Management System.

[0006] Improved Boost DC to DC Converters are also provided which reduce noise and ripple currents in low voltage/high current applications. According to one embodiment, a resonant capacitance is provided by two resonant capacitors which store voltage using switches that permit zero voltage switching. According to another embodiment, an input capacitor is provided to maintain a constant voltage input to a resonant circuit. The addition of the input capacitor reduces voltage stress in a switching circuit.

[0007] A DC to DC Converter is provided in a module of a Power Management System. The Power Management System preferably provides both full power source management and power conditioning. In other words, the Power Management System preferably manages power flow to and

from multiple, isolated DC power sources and energy storage devices, while delivering high quality alternating current ("AC") power to a load.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The foregoing features and advantages of the present invention will become more readily apparent from the following detailed description, made with reference to the following figures, in which:

[0009] FIG. 1 is a schematic block diagram of a conventional "battery node" hybrid power configuration according to the prior art.

[0010] FIG. 2 is a schematic block diagram of a series power management system configuration according to one embodiment of the present invention.

[0011] FIG. 3 is a schematic block diagram of a parallel power management system according to another embodiment of the present invention.

[0012] FIG. 4 is a schematic circuit diagram of a Buck and Boost DC to DC Converter according to another aspect of this invention.

[0013] FIG. 5A is a schematic circuit diagram of a Boost DC to DC Converter according to a further aspect of this invention.

[0014] FIG. 5B is a schematic circuit diagram of a Boost DC to DC Converter according to a still further aspect of this invention.

[0015] FIG. 5C is a schematic circuit diagram of a Boost DC to DC Converter according to the prior art.

[0016] FIG. 6 is a graph illustrating the current flow over time through an inductor of the Buck and Boost DC to DC converter of FIG. 4.

DETAILED DESCRIPTION

[0017] There are presently two preferred Power Management System configurations according to this invention, including a series converter configuration, illustrated in FIG. 2, and a parallel converter configuration, shown in FIG. 3. In FIGS. 2 and 3, the hybrid power systems 10, 110 of these two embodiments are shown having only a fuel cell 20 and a battery bank 25. It should be noted, however, that the fuel cell 20 could easily be replaced by any other DC power source, by a rectified AC source, or by an energy storage unit, as desired. Similarly, the battery bank 25 could be replaced by a flywheel energy storage unit or other energy storage device that is charged with and discharges direct current. It should also be noted that any number of fuel cells 20 and DC to DC Converters 14 can be arranged in parallel to supply current to the inverter. And furthermore, the single battery bank 25 could be replaced by any number of parallel battery banks or strings connecting to the common bus.

[0018] As noted above, the schematic block diagrams in FIGS. 2 and 3 illustrate a series and a parallel Power Management System 10, 110, respectively, according to preferred embodiments of the present invention. Referring to FIGS. 2 and 3, each of the Power Management Systems 10, 110 includes three main modules: the Controller Module 12; the DC to DC Converter Module (including the current control circuit) 14, 114; and the Inverter Module 16. Any

number of independent power sources, such as fuel cell **20** and battery bank **25**, are also included.

[0019] The independent power sources **20**, **25** can operate over different voltage ranges. The Controller Module **12** senses and analyzes the operating output of the power sources **20**, **25**. The DC to DC Converter Module **14**, **114** in conjunction with the Controller Module **12**, manages and consolidates the power from these sources **20**, **25** into a DC bus **13** for processing by the Inverter Module **16**. The system **10**, **110** delivers AC electrical power to a load through an output **18** of the Inverter Module **16**. The system **10**, **110** also automatically controls the charging and discharging of the battery bank **25**.

[0020] The DC to DC converter **14**, **114** operates with its own current control circuit **15**. It also communicates with the system controller **12** and receives input signals from the fuel cell controller **22**. Therefore, the terms "DC to DC Converter" and "DC to DC Buck and Boost Converter" can be used to refer to not only the actual DC to DC Converter switch related hardware, but also to the current control circuit **15** and the integration of these subsystems with the system controller **12** and the fuel cell (or photovoltaic array, or rectified AC, etc.) controller **22**.

[0021] In both the series and parallel configurations, each DC bus **13** can operate at its optimum voltage. In the relatively low voltage and high current examples shown in **FIGS. 2 and 3**, the converter circuits **14**, **114** use power MOSFETs to charge and discharge inductors to transfer power to and from the DC power sources. Both the series and parallel power management configurations **10**, **110** are preferably configured to operate fully automatically between zero and full power throughput in any of their various operating modes. The transition between these modes can be seamless. Various possible modes include a first mode (e.g., Startup/Shutdown Mode) in which the battery **25** is supplying all of the power to the DC bus **13** and inverter **16**; a second mode (e.g., Normal Operation Mode) in which the fuel cell **20** is supplying all of the power to the inverter **16**; a third mode (e.g., Recharge Mode) in which the fuel cell **20** is supplying all of the power to the inverter **16** and is also charging the battery **25**; and a fourth mode (e.g., Transient Mode) in which the fuel cell **20** is supplying less than the total amount of desired power to the inverter **16** and the battery **25** is supplying the balance of the power.

[0022] The series configured Power Management System **10**, shown in **FIG. 2**, will now be described in more detail. Referring specifically to **FIG. 2**, the term "series" refers to the fact that the DC to DC Converter **14** is located in series with the Fuel Cell **20** and the Inverter **16**. The series configuration illustrated in **FIG. 1** has an input to the inverter that is at the battery output node voltage. Unlike the conventional Hybrid Power configuration, the series Power Manager **10** includes a Controller Module **12** in addition to the DC to DC Converter Module **14** and the Inverter Module **16**. The combination of these modules can be referred to as a Power Manager or Power Management System **10**.

[0023] The Controller Module (or System Controller) **12** manages both the Inverter Module **16** and the Converter Module **14** to provide an integrated control system. The primary functions of the Controller Module **12** are to control the current drawn out of the fuel cell and to operate the Inverter Module **16**. The Controller **12** (in combination with

the DC to DC Converter **14**) controls the voltage of the variable voltage DC bus. The Control Module **12** thereby provides coordinated control of the Power Management System **10**. All of the modules, or subsystems, of the Power Management System **10** can be physically integrated together into a single hardware package.

[0024] **FIG. 3** shows one possible embodiment of a parallel Power Management System configuration **110**. Referring to **FIG. 3**, in this parallel system embodiment **110**, the current control circuit **15** detects and controls the DC voltage on the buses for both the battery **25** and the power converter **114**. As shown, one of the primary advantages of the parallel system **110** shown is that the voltage output from the fuel cell **20** goes directly into the inverter **16**. Because only a relatively small amount of the power is required to travel through the DC to DC converter (i.e., during battery charging or transient conditions), this configuration significantly reduces losses (such as switching losses) and improves efficiency. This configuration also reduces noise and ripple currents.

[0025] Referring now to **FIGS. 4, 5A, and 5B**, three DC to DC Converter circuits **114**, **214**, **314**, respectively, have been developed to perform the functions of the invention. Of course, many other circuit arrangements could be developed to perform the same functions and the invention is therefore not limited to any particular circuit arrangement. Circuit A, shown schematically in **FIG. 4**, provides a fully bi-directional buck and boost (and buck-boost) converter **114**. Circuits B and C, illustrated in **FIGS. 5A and 5B**, respectively, are DC to DC converters **214**, **314** with a boost capability only.

[0026] Referring to **FIG. 4**, Circuit A consists of an "H" switch bridge having four switch and diode pairs S_A and D_A , S_B and D_B , S_C and D_C , and S_D and D_D , coupled to the buck/boost inductor L_{BB} . In this arrangement, the DC to DC converter **114** circuit allows both buck and boost current in both directions. This converter **114** provides a current-controlled type of converter that follows the current demanded from the fuel cell by the inverter (or other load). This circuit provides excellent control of both bucking and boosting voltages with a minimum number of components.

[0027] Although **FIG. 4** shows the DC to DC Converter **114** installed in series with a fuel cell **20** and inverter **16**, such as in the Power Management System configuration shown in **FIG. 2**, because the converter can transfer power in either direction, the Circuit A converter **114** can also operate in the parallel configuration of **FIG. 3**. In the parallel Power Management System configuration **110** shown in **FIG. 3**, bi-directional buck and boost capabilities, such as those provided by this converter **114**, are required. In the series configuration **10** illustrated in **FIG. 2**, however, only a single direction boost capability is required. Of course, many other multi-source power systems are possible which would require the fully bi-directional buck and boost capabilities of the Circuit A converter **114** or a similar converter.

[0028] **FIG. 6** is a graph illustrating the current flow over time through the inductor L_{BB} of Circuit A of **FIG. 4**. Referring to **FIGS. 4 and 6**, Circuit A operates as follows. When switch S_A is closed (on) and switch S_D is closed (on), current flows from the fuel cell **20** through the inductor L_{BB} to ground. The circuit remains in this state until the inductor L_{BB} is charged to a threshold voltage. This state is shown as

stage 1 in FIG. 6. A voltage (or current) monitoring circuit (not shown) monitors the voltage across (or current through) the inductor L_{BB} .

[0029] Once the inductor L_{BB} has been charged to the threshold voltage, switch S_D is opened (off) and switch S_C is closed (on), while switch S_A remains closed (on). This state is shown as stage 2 in FIG. 6. During this stage, current is flowing from the fuel cell 20 to the inverter 16 and battery 25. If the voltage at the output of the converter 114 (i.e., the input to the inverter 16) is raised (or boosted) above the voltage at the input of the converter 114 (i.e., the output terminal of the fuel cell 20), then the circuit is in the boost configuration. In the boost configuration, the slope of the line in FIG. 6 representing stage 2 is downward and is proportional to the voltage delta across the inductor L_{BB} (i.e., the difference between the input and output voltages), and the current through the inductor L_{BB} is being dissipated.

[0030] If the voltage at the output of the converter 114 is lower than the voltage at its input, then the circuit is in the buck configuration (i.e., voltage at the inverter input is reduced below the voltage at the fuel cell output). Current and power are still flowing from the fuel cell 20 to the inverter 16 and battery 25, but the slope of the line in FIG. 6 representing stage 2 will be upwards, again in proportion to the voltage delta across the inductor L_{BB} . In this state, the current through the inductor continues to ramp up until switch S_A is opened. The converter 114 can be kept in the buck configuration simply by cycling switch S_A to allow the current to maintain a steady level.

[0031] In the boost configuration, after the energy in the inductor L_{BB} is substantially dissipated, switch S_A is opened (off) and switches S_B and S_C are closed (on). Closing switches S_B and S_C discharges the remaining energy in the inductor L_{BB} fast without stressing the two diodes D_B and D_C . At the same time, however, some current is also flowing through the diodes D_B and D_C . When the current through (or voltage across) the inductor L_{BB} drops below a threshold value (i.e., current less than 5A), switches S_B and S_C are opened (off), allowing the diodes D_B and D_C to complete the discharge of the inductor L_{BB} . Once the current through the inductor L_{BB} reaches zero, another cycle is started by closing switches S_A and S_D .

[0032] The inductor L_{BB} should be discharged after reaching the end of stage 2 before beginning a new cycle (stage 1). A current from right to left may still be passing through the inductor L_{BB} at the end of stage 2. In other words, a reverse current may still exist in the inductor L_{BB} at this point. If switches S_A and S_D were simply turned back on and switches S_C and S_B turned off, a large forward current would be generated from the fuel cell through the inductor L_{BB} to ground. These two oppositely directed currents could damage the diodes. Accordingly, the inductor L_{BB} is completely discharged before the next boost cycle is started.

[0033] It should also be noted that the converter 114 of Circuit A maintains a high current level during stage 2. This high current level increases the RMS current and eliminates the need for generating a large current peak. The bi-directional aspect of the converter 114 of Circuit A allows the inductor L_{BB} to be discharged faster (i.e., during stages 3 and 4) between boost cycles (stages 1 and 2).

[0034] Power flow to the fuel cell 20, although not wanted in practice, is also possible using the bi-directional converter

114 of FIG. 4, and is explained here for illustration. This reverse power flow is potentially desirable for rechargeable DC power sources. Power flow to the fuel cell 20 (from right to left) is enabled in the boost configuration by closing switch S_C and cycling S_B . It is enabled in the buck configuration by cycling switch S_C . A practical application of where power flow from the inverter/battery would be desirable is where the fuel cell is replaced by a second storage device such as a battery. For example, a battery bank operating at nominally 24VDC can be used to replace the fuel cell 20. In this circumstance, in the conventional direction (left to right), the DC to DC converter 114 boosts that voltage to nominally 48VDC, which is the operating voltage of the original battery bank. In the opposite direction (right to left), the DC to DC converter 114 bucks the voltage of the original battery bank to 24VDC, for instance, to recharge the battery that replaced the fuel cell.

[0035] As noted briefly above, a novel method of substantially decreasing the peak to RMS current ratio is also provided. This method is enabled, for instance, by using four parallel gate (or switch) and diode pairs. Again referring to FIGS. 4 and 6, the use of four parallel gate and diode pairs allows the converter 114 of Circuit A to reduce the current peak and tailor the shape of the current flowing through the inductor L_{BB} during each cycle. This is accomplished by operating pairs of switches for the first three stages of the cycle. During stage 1, the switches S_A and S_D are on. During stage 2, the switches S_A and S_C are on. And, during stage 3, switches S_B and S_C are on. During the fourth and final stage (stage 4), current is conducted through diodes D_B and D_C only. Alternatively, the cycle can be constructed of three stages rather than four, with the first two stages being the same as the first two stages described previously and with the third stage being that of conducting current through diodes D_B and D_C only. In other words, the third stage of the four stage process could be eliminated, if desired, to create a three stage process.

[0036] "Boost only" DC to DC Converter circuits 214, 314 are shown in FIGS. 5A and 5B, respectively. These converter circuits represent a significant improvement to the conventional converter circuit design described in the technical paper: Duarte, Claudio Manoel da Cunha and Ivo Barbi, "A New Family of ZVS-PSW Active-Clamping DC-to-DC Boost Converters: Analysis, Design, and Experimentation" *IEEE Transactions on Power Electronics*, Vol. 12, No. Sep. 5, 1997, pp 824-831 (the "Duarte paper") (see FIG. 5C).

[0037] Circuit B, shown in FIG. 5A, and Circuit C, shown in FIG. 5B, are designed to be zero-voltage switching (ZVS) pulse-width modulation (PWM) active-clamping DC to DC boost converters. The circuits are based on the "boost-buck-boost" circuit shown in FIG. 1(c) of the Duarte paper. The general circuit configuration shown in FIG. 1(c) of the Duarte paper is reproduced here as FIG. 5C. In each of the circuits shown in FIGS. 5A, 5B, and 5C, power is transferred to the load during a boost stage, while the clamping action is performed during a buck-boost stage. The converter circuits of FIGS. 5A, 5B, and 5C differ from earlier conventional boost pulse-width modulation (PWM) converters because of the incorporation of an additional auxiliary switch (S_2), a resonant inductor (L_R), a resonant capacitor (C_{R1}) (which includes the output capacitance of the power switches), and a clamping capacitor C_C . In each of these

circuits, switch S_1 is the main switch. Voltage V_S is the input voltage and voltage V_0 is the output voltage. Inductor L_R and capacitor C_{R1} are the resonant circuit inductor and capacitor, respectively. Inductor L_B is the boost inductor.

[0038] Despite the similarities between these converter circuits, the converters **214**, **314** of Circuits B and C, respectively, each offer an improved design over that of the prior art circuit **414**. More specifically, an additional capacitor is included in each of Circuits B and C to achieving soft switching and reliable current control for low voltage (e.g., less than about 100V) and high current (e.g., up to around 150 A) applications. The circuits developed and described by Duarte and Barbi are primarily aimed at high voltage (i.e., around 300V-400V), low current (i.e., around 5 A) applications, and because of the low current involved, do not contemplate the need for additional capacitors for satisfactory switching. By recognizing and addressing this need, the two converters **214**, **314** of FIGS. **5A** and **5B** are able to offer improved performance over prior art DC to DC converter circuits, such as the one **414** illustrated in FIG. **5C**, in low voltage/high current applications.

[0039] Referring to FIG. **5A**, the DC to DC converter **214** of Circuit B includes the addition of a capacitor C_{R2} on the output side of the resonant circuit across the auxiliary switch S_2 . The second resonant capacitor C_{R2} is beneficial in low voltage and high current applications such as fuel cell and battery systems because it substantially reduces output DC current ripple and switching losses and provides better control for combined low voltage/high current applications.

[0040] The principle of operation of Circuit B is as follows. The inductance in the boost inductor L_B is assumed to be large enough for the inductor to act as a current source (I_S). The clamping capacitor C_C is selected to have a large capacitance so that the voltage V_C across this capacitor can be considered a constant. The main and auxiliary switches S_1 and S_2 , respectively, are switched in a complementary way. The main switch S_1 is turned off at time $(t)=t_0$, when the switching period starts.

[0041] Before time t_0 , the main switch S_1 is on and the auxiliary switch S_2 is off. When S_1 is turned off at time t_0 , the resonant capacitor C_{R1} is linearly charged, by the boost inductor current I_S , to a base voltage V_0 . Due to the presence of the resonant capacitor C_{R1} , the main switch S_1 is turned off with no switching loss. When the voltage V_{CR1} reaches the voltage V_0 , the boost diode D_B begins conducting. The current through the resonant inductor L_R and the resonant capacitor C_{R1} then evolves in a resonant way, and the resonant capacitor voltage V_{CR1} rises from the base voltage V_0 up to an increased voltage equal to $V_{CC}+V_0$. At that point, the voltages are clamped. As the capacitor voltage V_{CR1} becomes equal to $V_{CC}+V_0$, the voltage across the auxiliary switch S_2 is zero, and the switch S_2 turns on with a no loss zero-voltage switching (ZVS). The resonant inductor L_R current then ramps down until it reaches zero, when it changes its direction and rises again.

[0042] This stage ends when the auxiliary switch S_2 is turned off with zero volts on the switch S_2 due to the presence of the added capacitor C_{R2} at time t_3 ($t=t_3$). The voltage across the resonant capacitor C_{R1} falls, due to resonance between inductor L_R and the first or second resonant capacitor C_{R1} or C_{R2} , until it reaches zero at time t_4 ($t=t_4$). In stage **5**, the main switch S_1 is turned on without

any switching losses (ZVS), because the first resonant capacitor voltage V_{CR1} became null. During this stage, the current through the resonant inductor L_R changes its polarity and ramps up to reach the boost inductor current I_S . At time t_5 ($t=t_5$), the diode D_B becomes reversibly biased and power is not transferred to the load. This stage ends when the main switch S_1 is turned off at the end of the first switching cycle to start the next switching cycle.

[0043] Circuit B offers an improvement over the prior art by splitting its resonant circuit capacitance between two capacitors C_{R1} and C_{R2} to allow zero or low voltage switching by both switches S_1 and S_2 . More particularly, the second resonant capacitor C_{R2} acts as part of the resonant control circuit that includes the resonant inductor L_R and the first resonant capacitor C_{R1} . The oscillation that occurs when the main switch S_1 is switched on and off can be neutralized using the second capacitor C_{R2} by selectively switching the auxiliary switch S_2 . When the second capacitor C_{R2} is substantially smaller than the first capacitor C_{R1} , oscillation control can be provided at low voltage. By dividing the capacitance between the two resonant circuit capacitors C_{R1} and C_{R2} , the voltage on switches S_1 and S_2 can be ramped down to allow zero voltage switching. Furthermore, because the capacitors store the voltages with no voltage losses, they provide efficient power transfer between the input and the output nodes of the converter **214**.

[0044] Referring now to FIG. **5B**, the DC to DC converter **314** of Circuit C is another boost converter embodiment capable of use in the Power Management System **10** of FIG. **2**. In this converter **314**, an input capacitor C_1 has been added to the input side of the resonant circuit of the prior art converter **414** of FIG. **5C**. Without the capacitor C_1 , the voltage at node A dips in high current applications, and large voltage swings occur at that node. These voltage swings cause a large voltage stress on switch S_1 and result in an inability to achieve reliable control of the current through the resonant inductor L_R .

[0045] With the addition of capacitor C_1 in the circuit, the voltage at node A can be held steady during switching. Because the input capacitor C_1 maintains a constant voltage at node A, the voltage stress on the main switch S_1 is reduced. Specifically, by dampening the voltage swings at node A, the input capacitor C_1 filters out high voltage swings and keeps them from affecting the switch S_1 . This steady voltage at node A helps achieve soft switching and good current control.

[0046] Having described and illustrated the principles of the invention in various preferred embodiments thereof, it should be apparent that the various implementations of the invention described above can be modified in arrangement and detail without departing from such principles. We claim all modifications and variations coming within the spirit and scope of the following claims.

What is claimed is:

1. A power management system, comprising:

a plurality of independent DC power sources connected to a DC bus; wherein at least one of the independent power sources comprises a rechargeable DC power source for supplying power to and receiving power

from the DC bus, and wherein at least one of the DC power sources is a fuel cell or a PhotoVoltaic (PV) array;

a DC to DC converter connected between an output of the rechargeable DC power sources and the DC bus in parallel with the fuel cell or the PV array; and

a system controller for managing power transfer between the multiple independent DC power sources and the DC bus.

2. A power management system according to claim 1, wherein the system controller is configured to control the current supplied from each of the power sources to the DC bus and from the DC bus to each of the power sources.

3. A power management system according to claim 1, further comprising an inverter for converting DC power from the independent DC power sources into AC power.

4. A power management system according to claim 1, wherein the fuel cell comprises a fuel cell controller.

5. A power management system according to claim 4, wherein the system controller communicates with the fuel cell controller to control the amount of power supplied by the fuel cell to the DC bus.

6. A power management system according to claim 1, wherein the DC to DC converter further comprises a converter control circuit that communicates with the system controller to control an amount of power transferred between the DC to DC converter and the DC bus.

7. A power management system according to claim 1, further comprising an inverter, wherein the DC to DC converter is arranged in series between the fuel cell or the PV array and the inverter.

8. A power management system according to claim 1, further comprising an inverter, wherein the DC to DC converter is arranged in parallel with the fuel cell or the PV array and the inverter.

9. A method for managing multiple independent DC power sources, comprising:

arranging a plurality of independent DC power sources in communication with a DC bus; wherein at least one of the DC power sources comprises a fuel cell or a PV array;

converting a voltage from one or more of the independent DC power sources to conform to a voltage of the DC bus; wherein converting a voltage from one or more of the independent DC power sources to conform to a voltage of the DC bus comprises arranging a DC to DC converter in series between one or more of the independent DC power sources and the DC bus and in parallel with the fuel cell or the PV array and the DC bus; and

controlling the amount of power that the DC bus supplies to or receives from one or more of the independent power sources.

10. A method of managing multiple independent DC power sources according to claim 9, wherein controlling the amount of power that the DC bus supplies to or receives from one or more of the independent power sources com-

prises integrating between a plurality of modes wherein each of the DC power sources is either supplying some or all of the required power, being recharged by one or more of the other DC power sources, or being isolated from the DC bus.

11. A method of managing multiple independent DC power sources according to claim 9, wherein converting a voltage from one or more of the independent DC power sources to conform to a voltage of the DC bus comprises arranging a DC to DC converter in series between a rechargeable DC power source and the DC bus.

12. A method of managing multiple independent DC power sources according to claim 11, wherein the DC to DC converter is arranged in parallel with the fuel cell or the PV array and an inverter.

13. A method of managing multiple independent DC power sources according to claim 9, further comprising supplying the DC power from the DC bus to an inverter for conversion into AC power to enable the provision of AC power to a load.

14. A DC to DC converter, comprising:

an input node for receiving power from a DC power source;

a plurality of switch-diode pairs arranged between the input node and an output node; and

an inductor arranged between two or more of the switch-diode pairs, wherein the inductor is configured to convert a voltage between the input node and the output node in response to actuation of the switches.

15. A DC to DC converter according to claim 14, wherein the plurality of switch-diode pairs comprises four switch-diode pairs, and wherein two switch-diode pairs are connected on each side of the inductor.

16. A DC to DC converter according to claim 14, wherein current through the inductor is fully bi-directional.

17. A DC to DC converter according to claim 14, wherein a first switch-diode pair is connected between the input node and a first end of the inductor, and wherein a second switch-diode pair is connected between the first end of the inductor and ground.

18. A DC to DC converter according to claim 14, wherein a third switch-diode pair is connected between a second end of the inductor and the output node, and wherein a fourth switch-diode pair is connected between the second end of the inductor and ground.

19. An improved DC to DC converter having a boosting inductor connected to an input node, a clamping capacitor, a plurality of diodes, and a resonant circuit comprising a resonant inductor and a resonant capacitor, wherein the improvement comprises an additional capacitor configured to stabilize a voltage.

20. An improved DC to DC converter according to claim 19, wherein the node comprises an input node to the resonant circuit.

21. An improved DC to DC converter according to claim 19, wherein the node comprises an output node from the resonant circuit.

* * * * *