



US 20190314834A1

(19) **United States**

(12) **Patent Application Publication**
McCarthy

(10) **Pub. No.: US 2019/0314834 A1**

(43) **Pub. Date: Oct. 17, 2019**

(54) **CUP LINER AND A FITTING FOR A SPRAY GUN**

Publication Classification

(71) Applicant: **Kevin McCarthy**, Affton, MO (US)

(51) **Int. Cl.**
B05B 7/04 (2006.01)

(72) Inventor: **Kevin McCarthy**, Affton, MO (US)

(52) **U.S. Cl.**
CPC **B05B 7/0408** (2013.01)

(21) Appl. No.: **16/382,456**


(57) **ABSTRACT**

(22) Filed: **Apr. 12, 2019**

A cup liner for a cup of a spray gun includes a fluid reservoir portion that defines a reservoir and includes a divider portion dividing the reservoir into two or more compartments. Each compartment contains a fluid to be dispensed by the spray gun and keeps the fluids separated from fluids held by other compartments. In addition, a fitting for a spray gun includes two or more inlet interfaces and an outlet interface. Each inlet interface couples to a fluid source and the outlet couples to the spray gun such that the fitting provides fluid communication between each fluid source and the spray gun. This permits the spray gun to spray a mixture of the fluids.

Related U.S. Application Data

(60) Provisional application No. 62/761,962, filed on Apr. 12, 2018, provisional application No. 62/763,964, filed on Jul. 12, 2018.

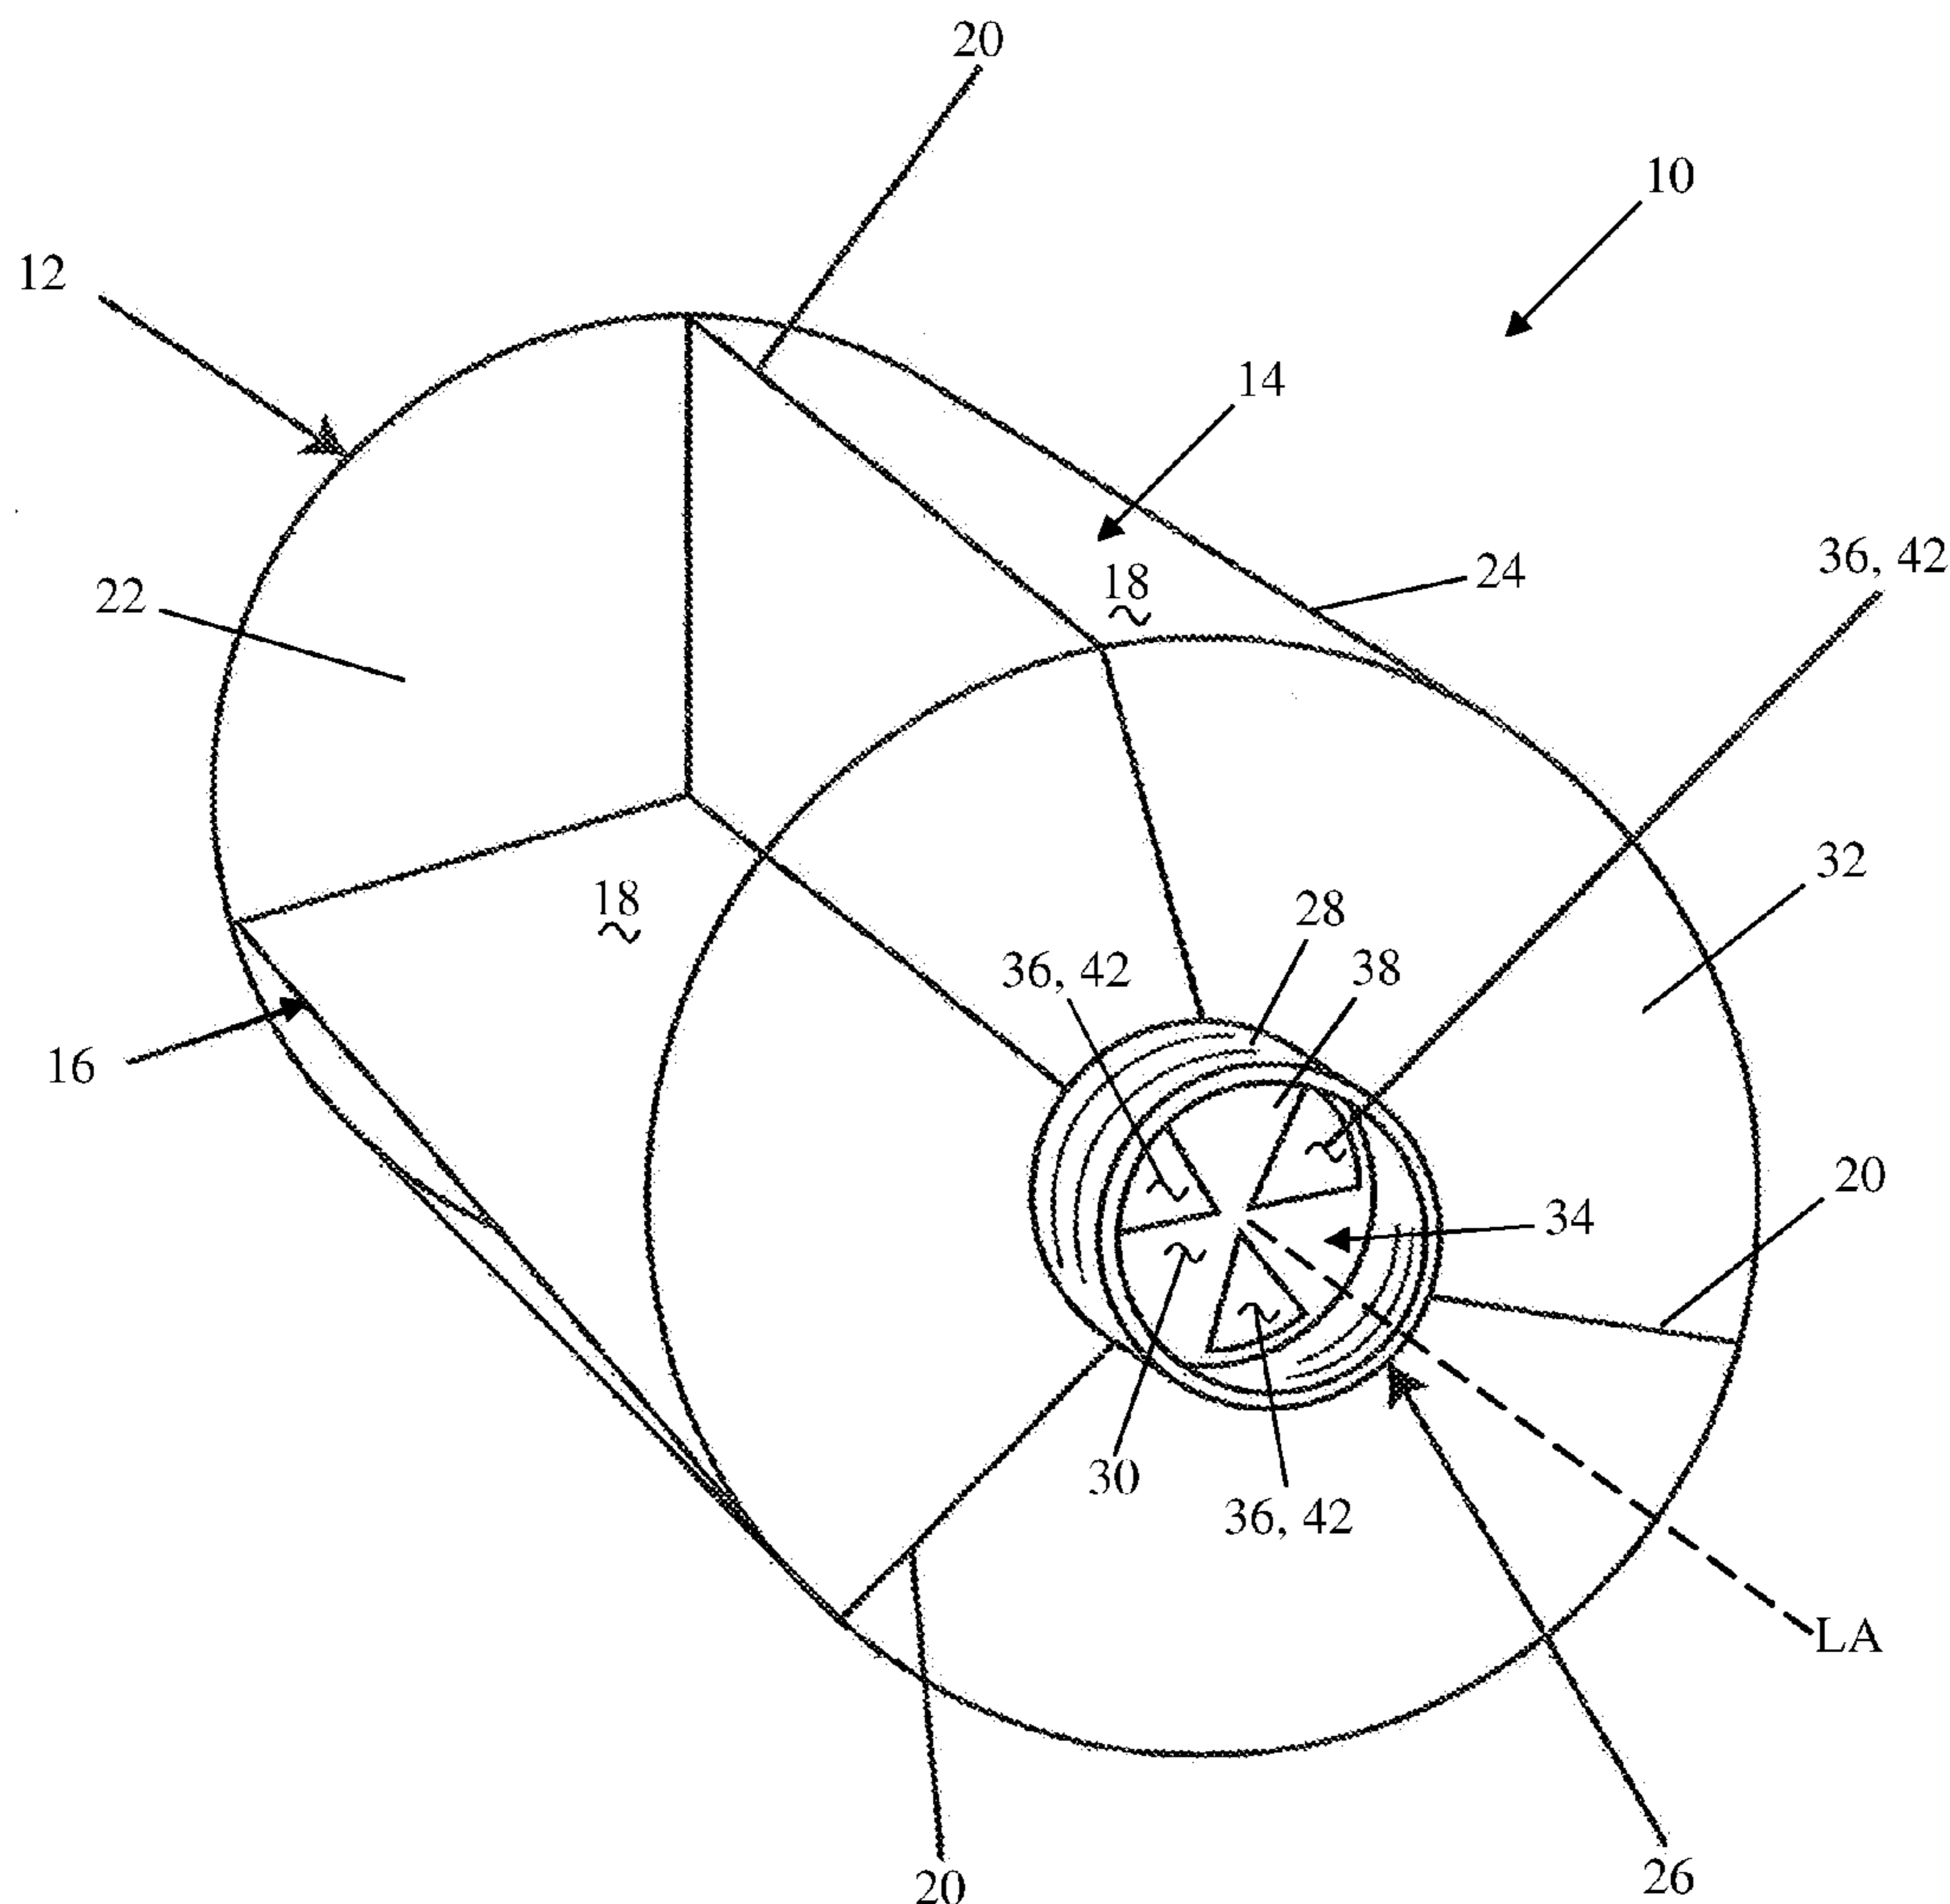

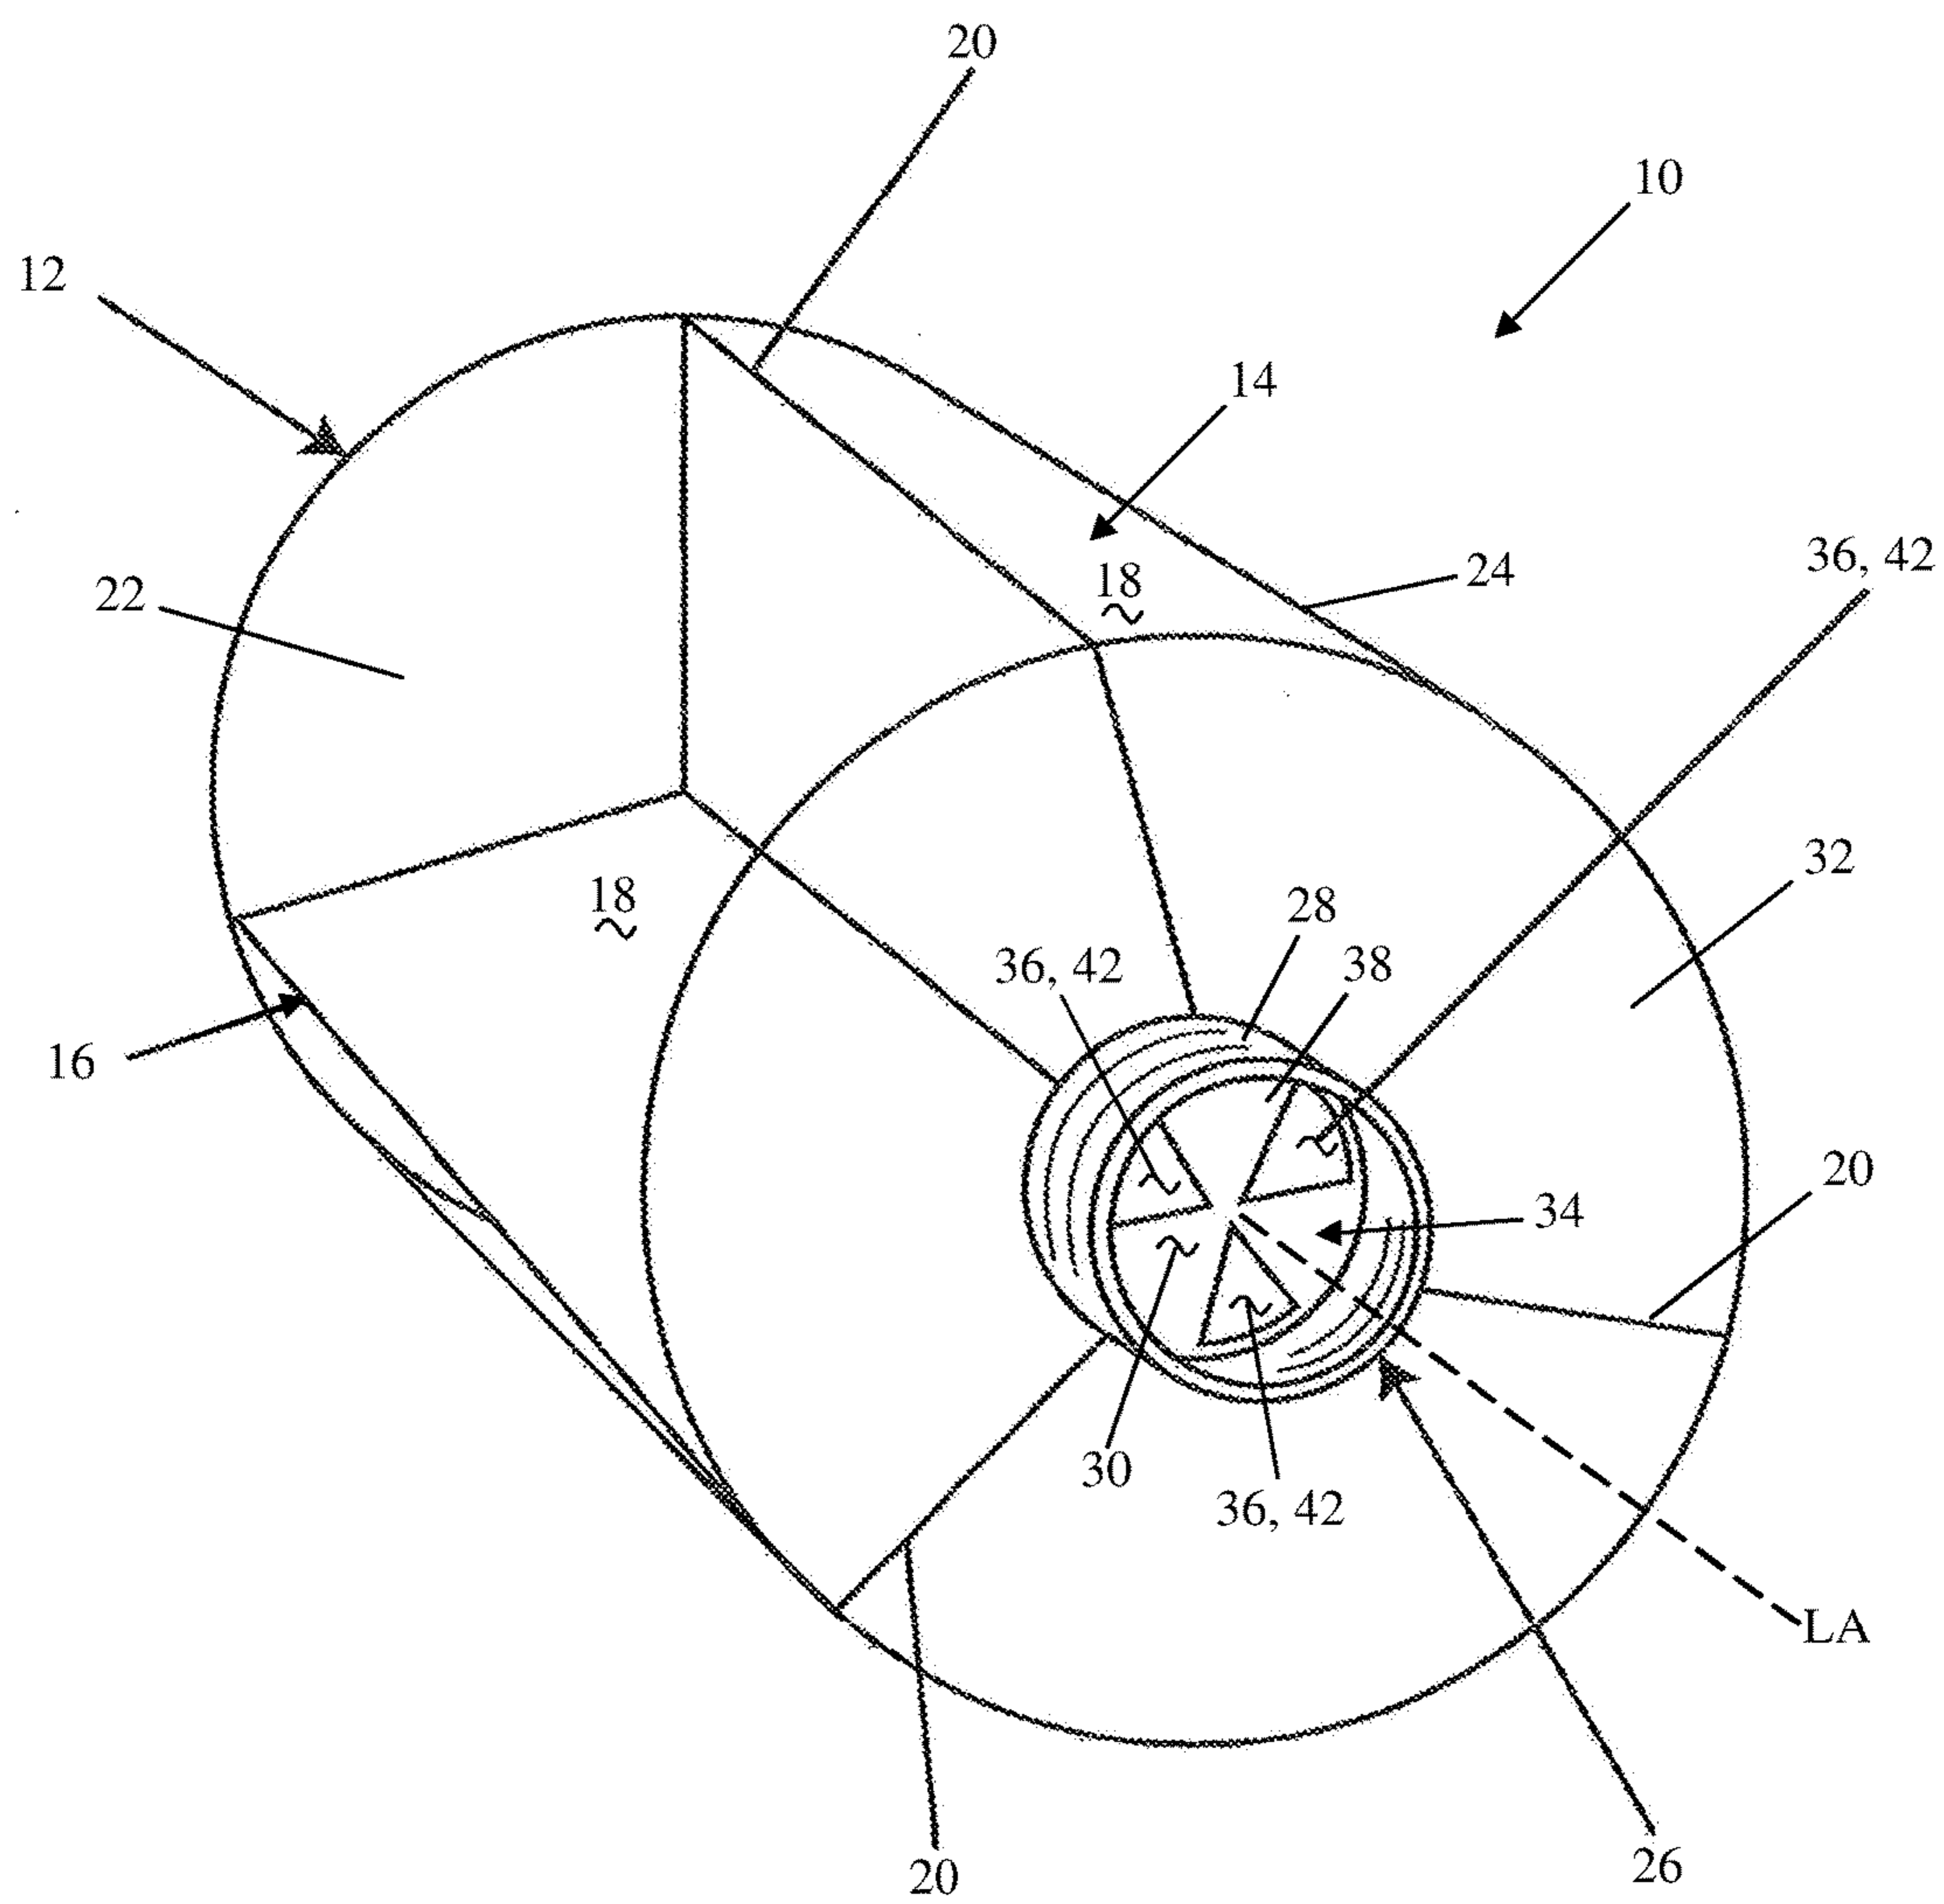


FIG. 1

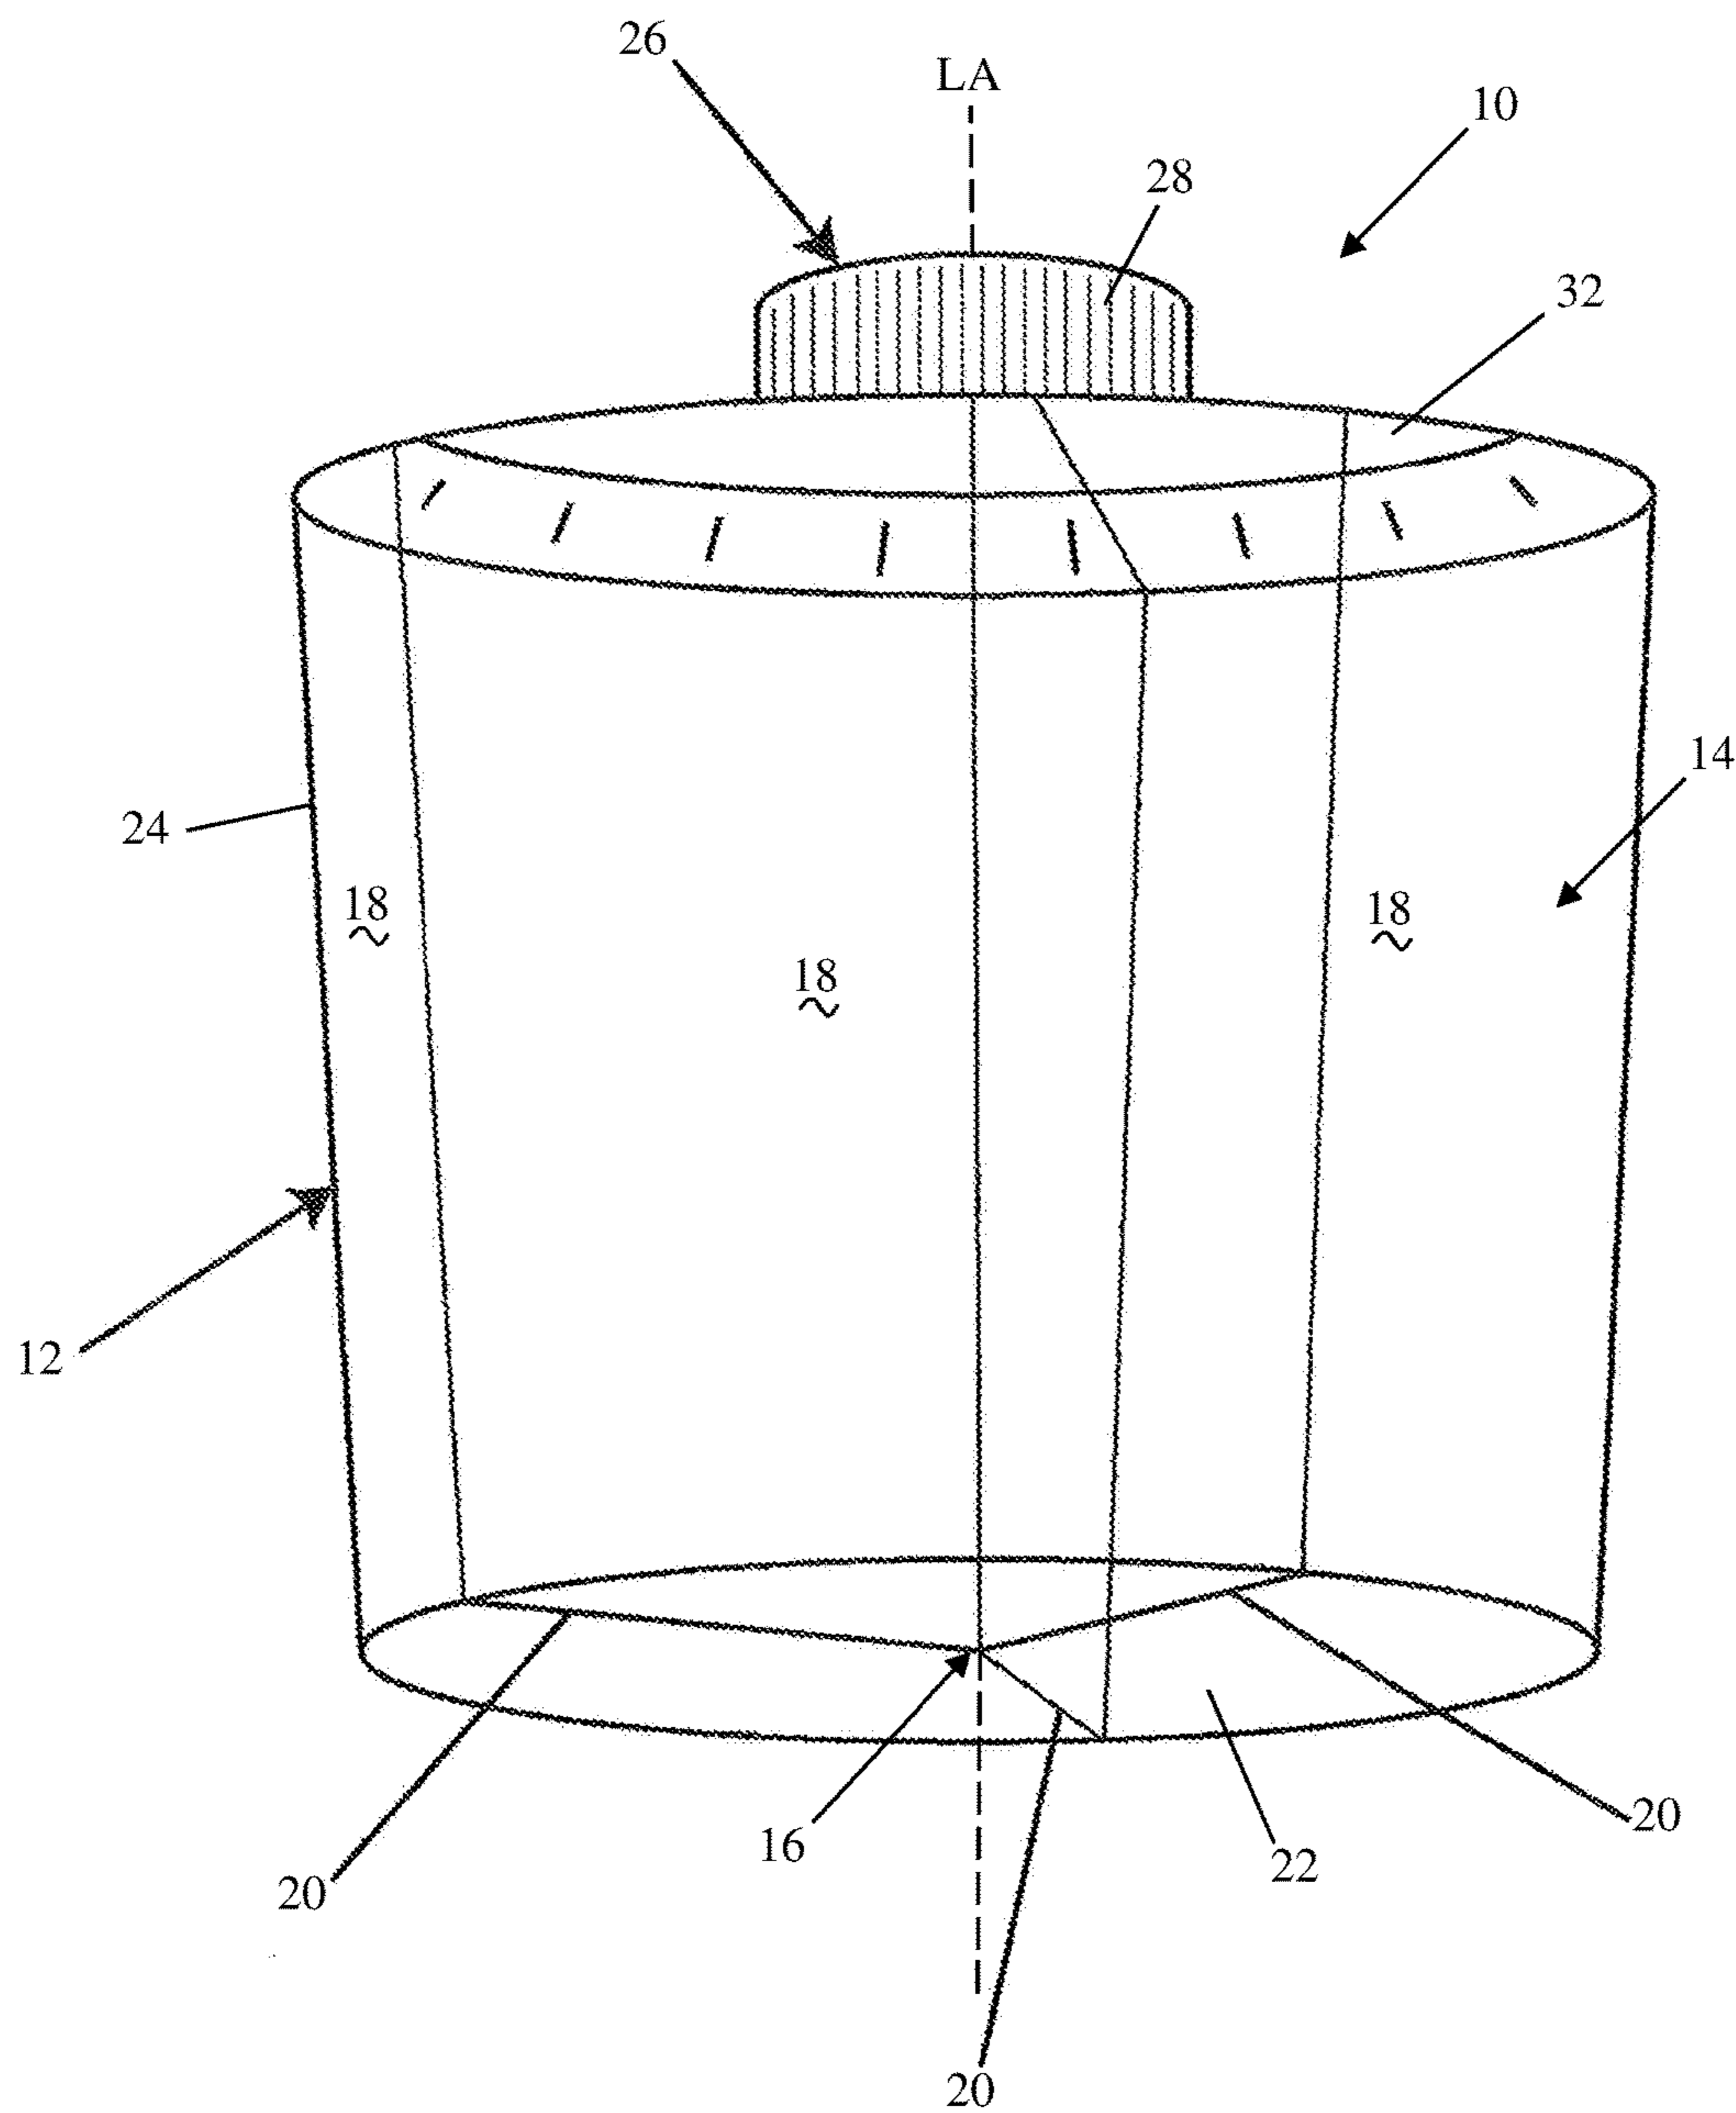


FIG. 2

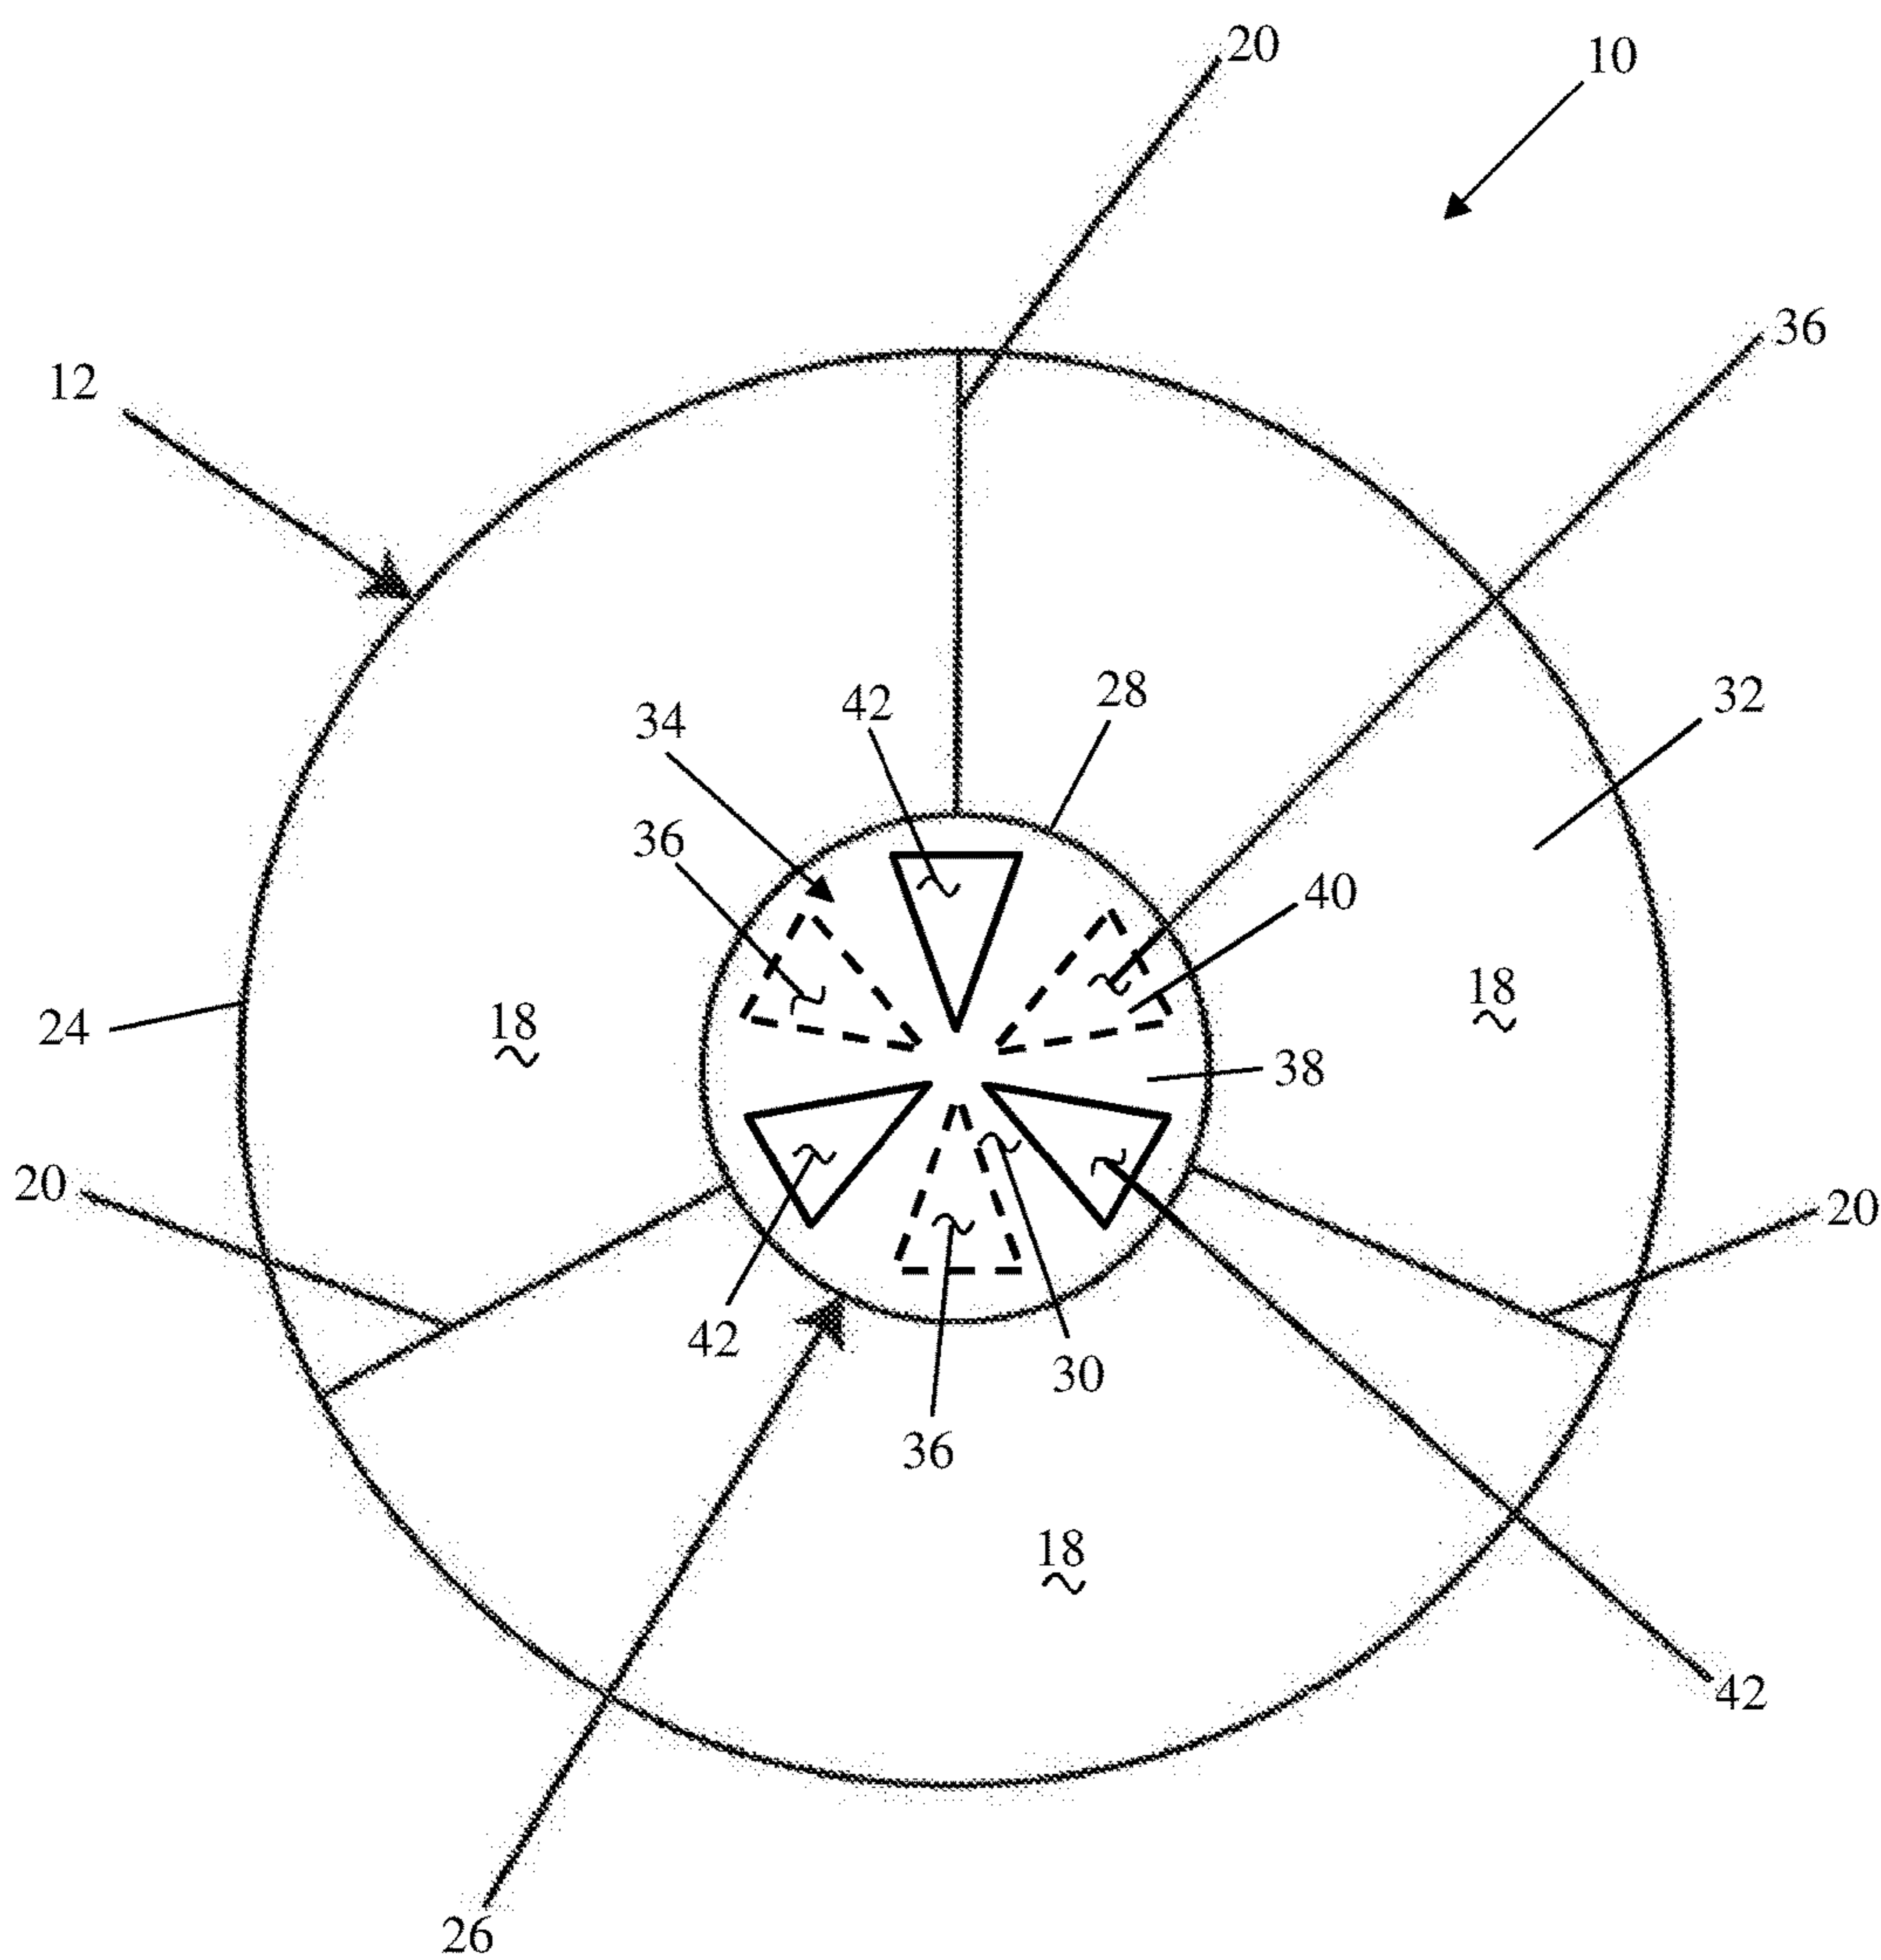


FIG. 3

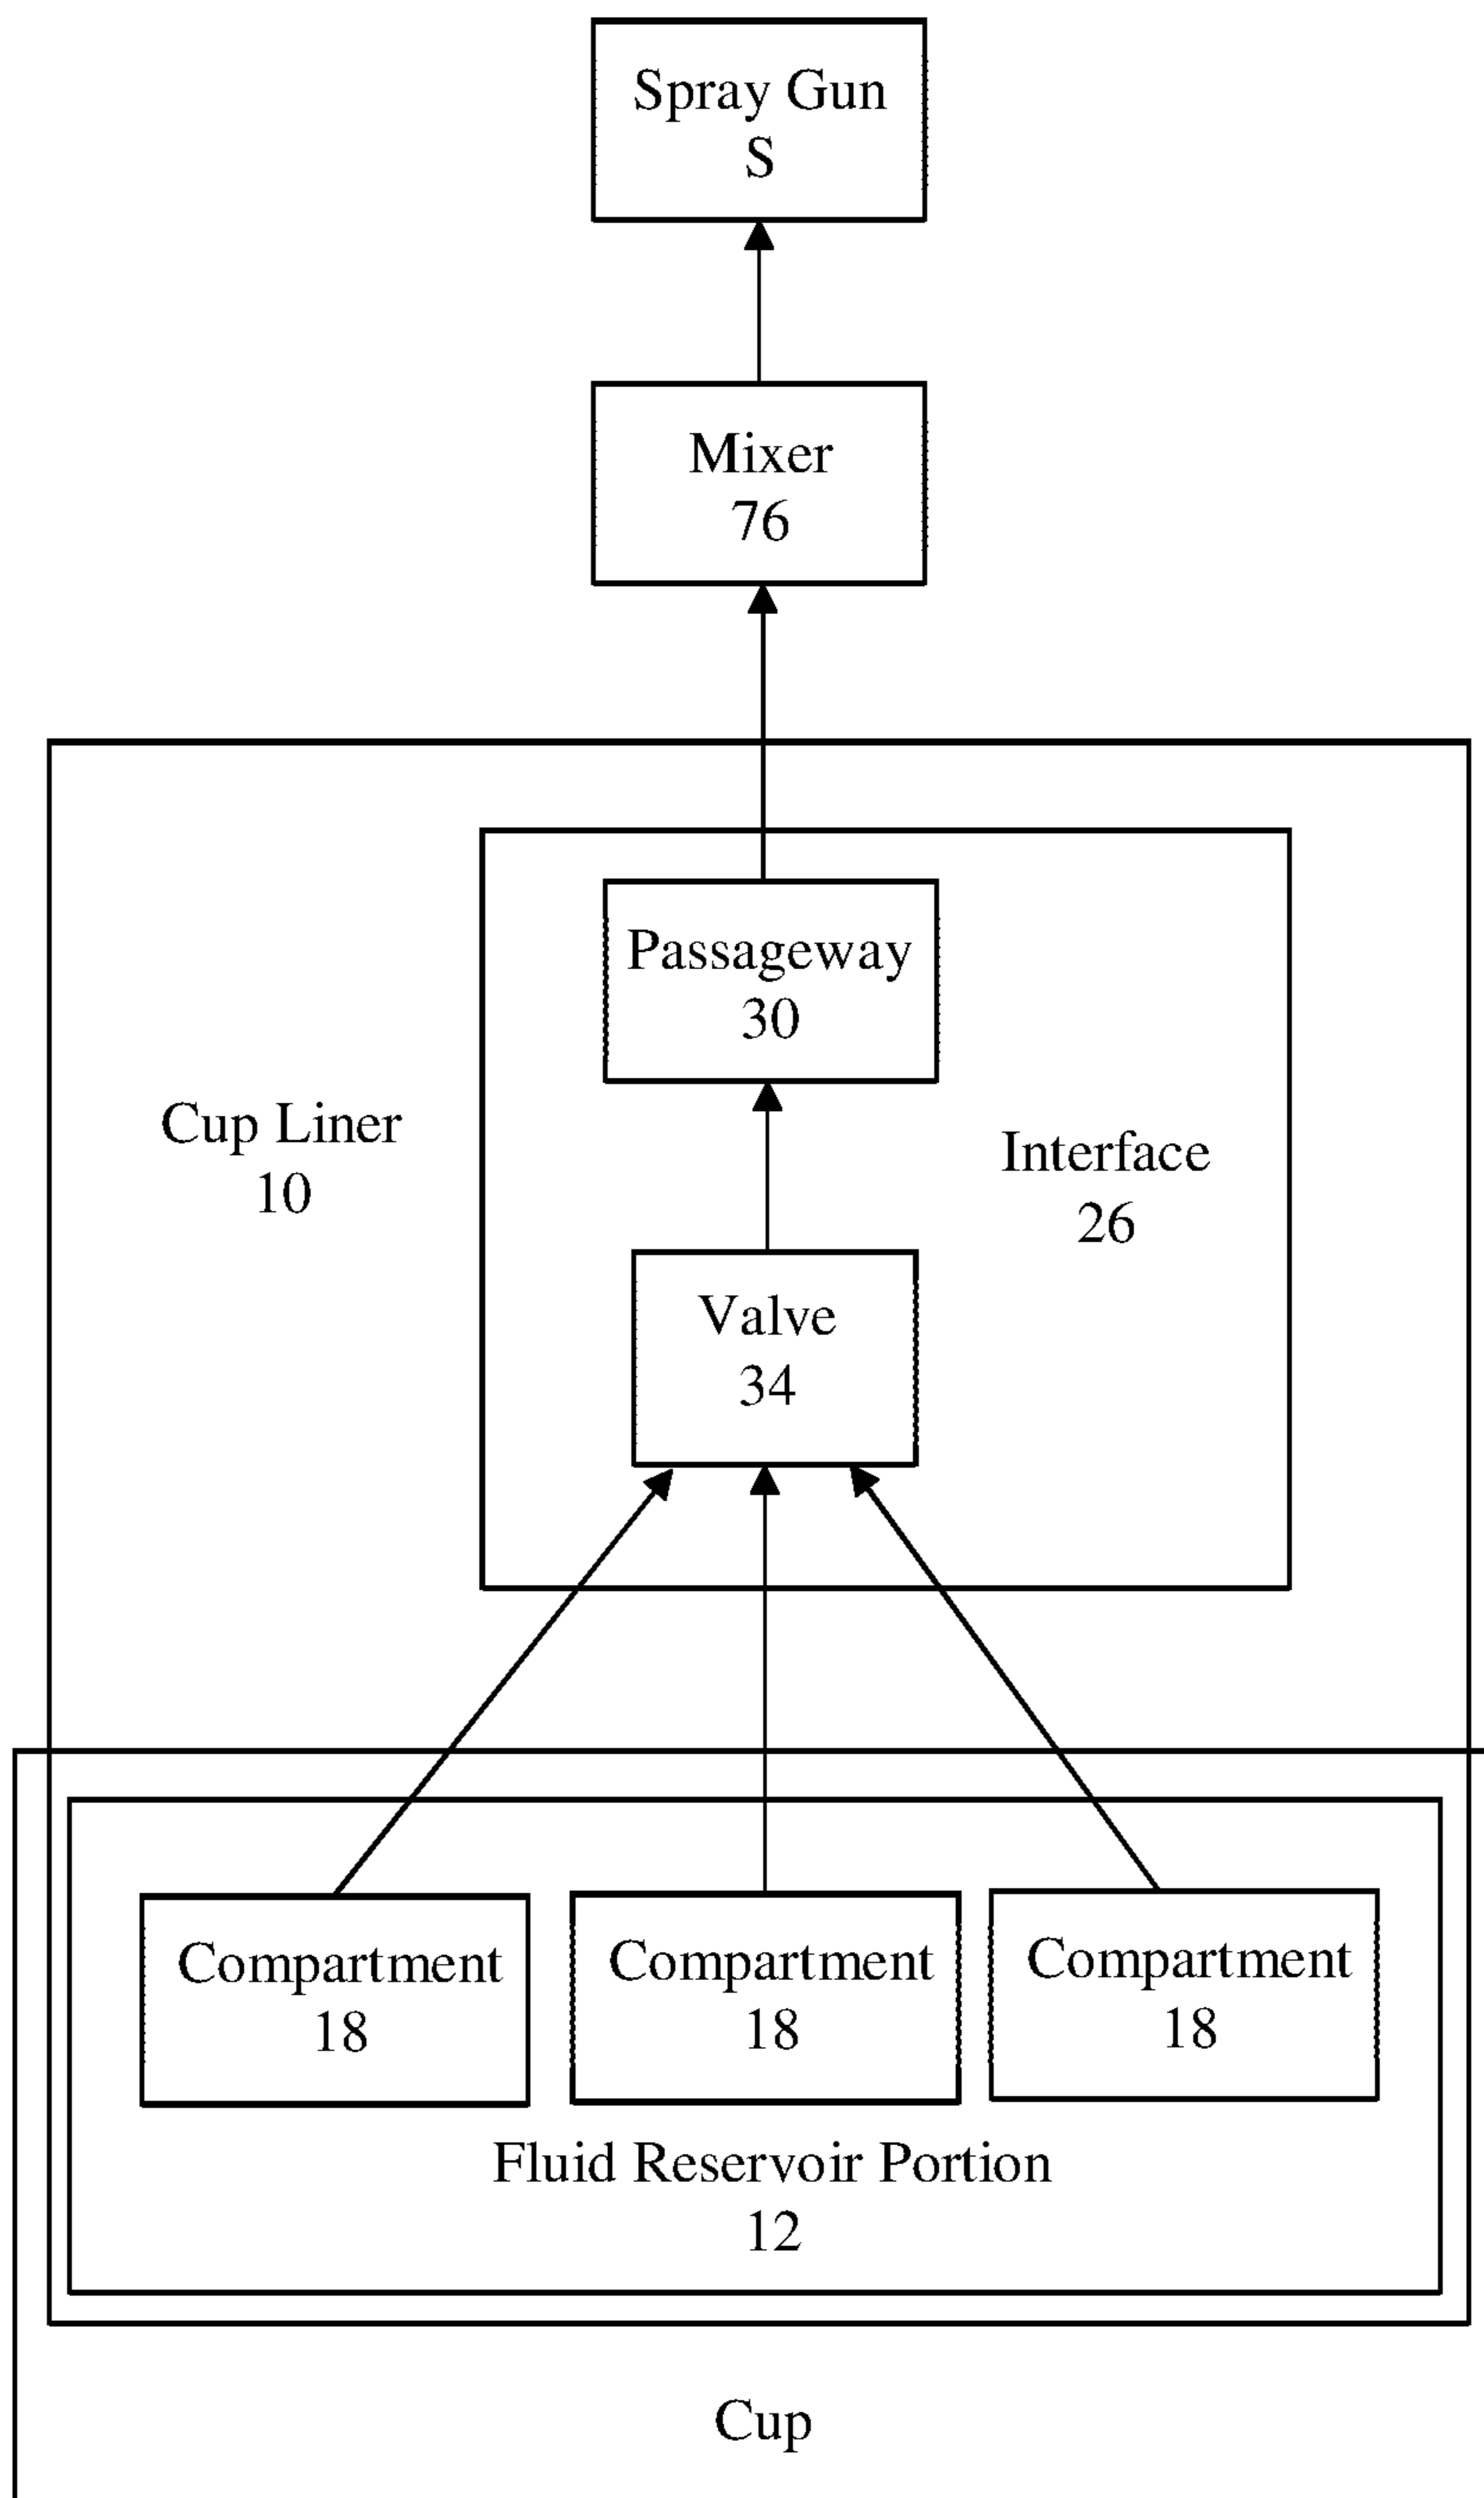


FIG. 4

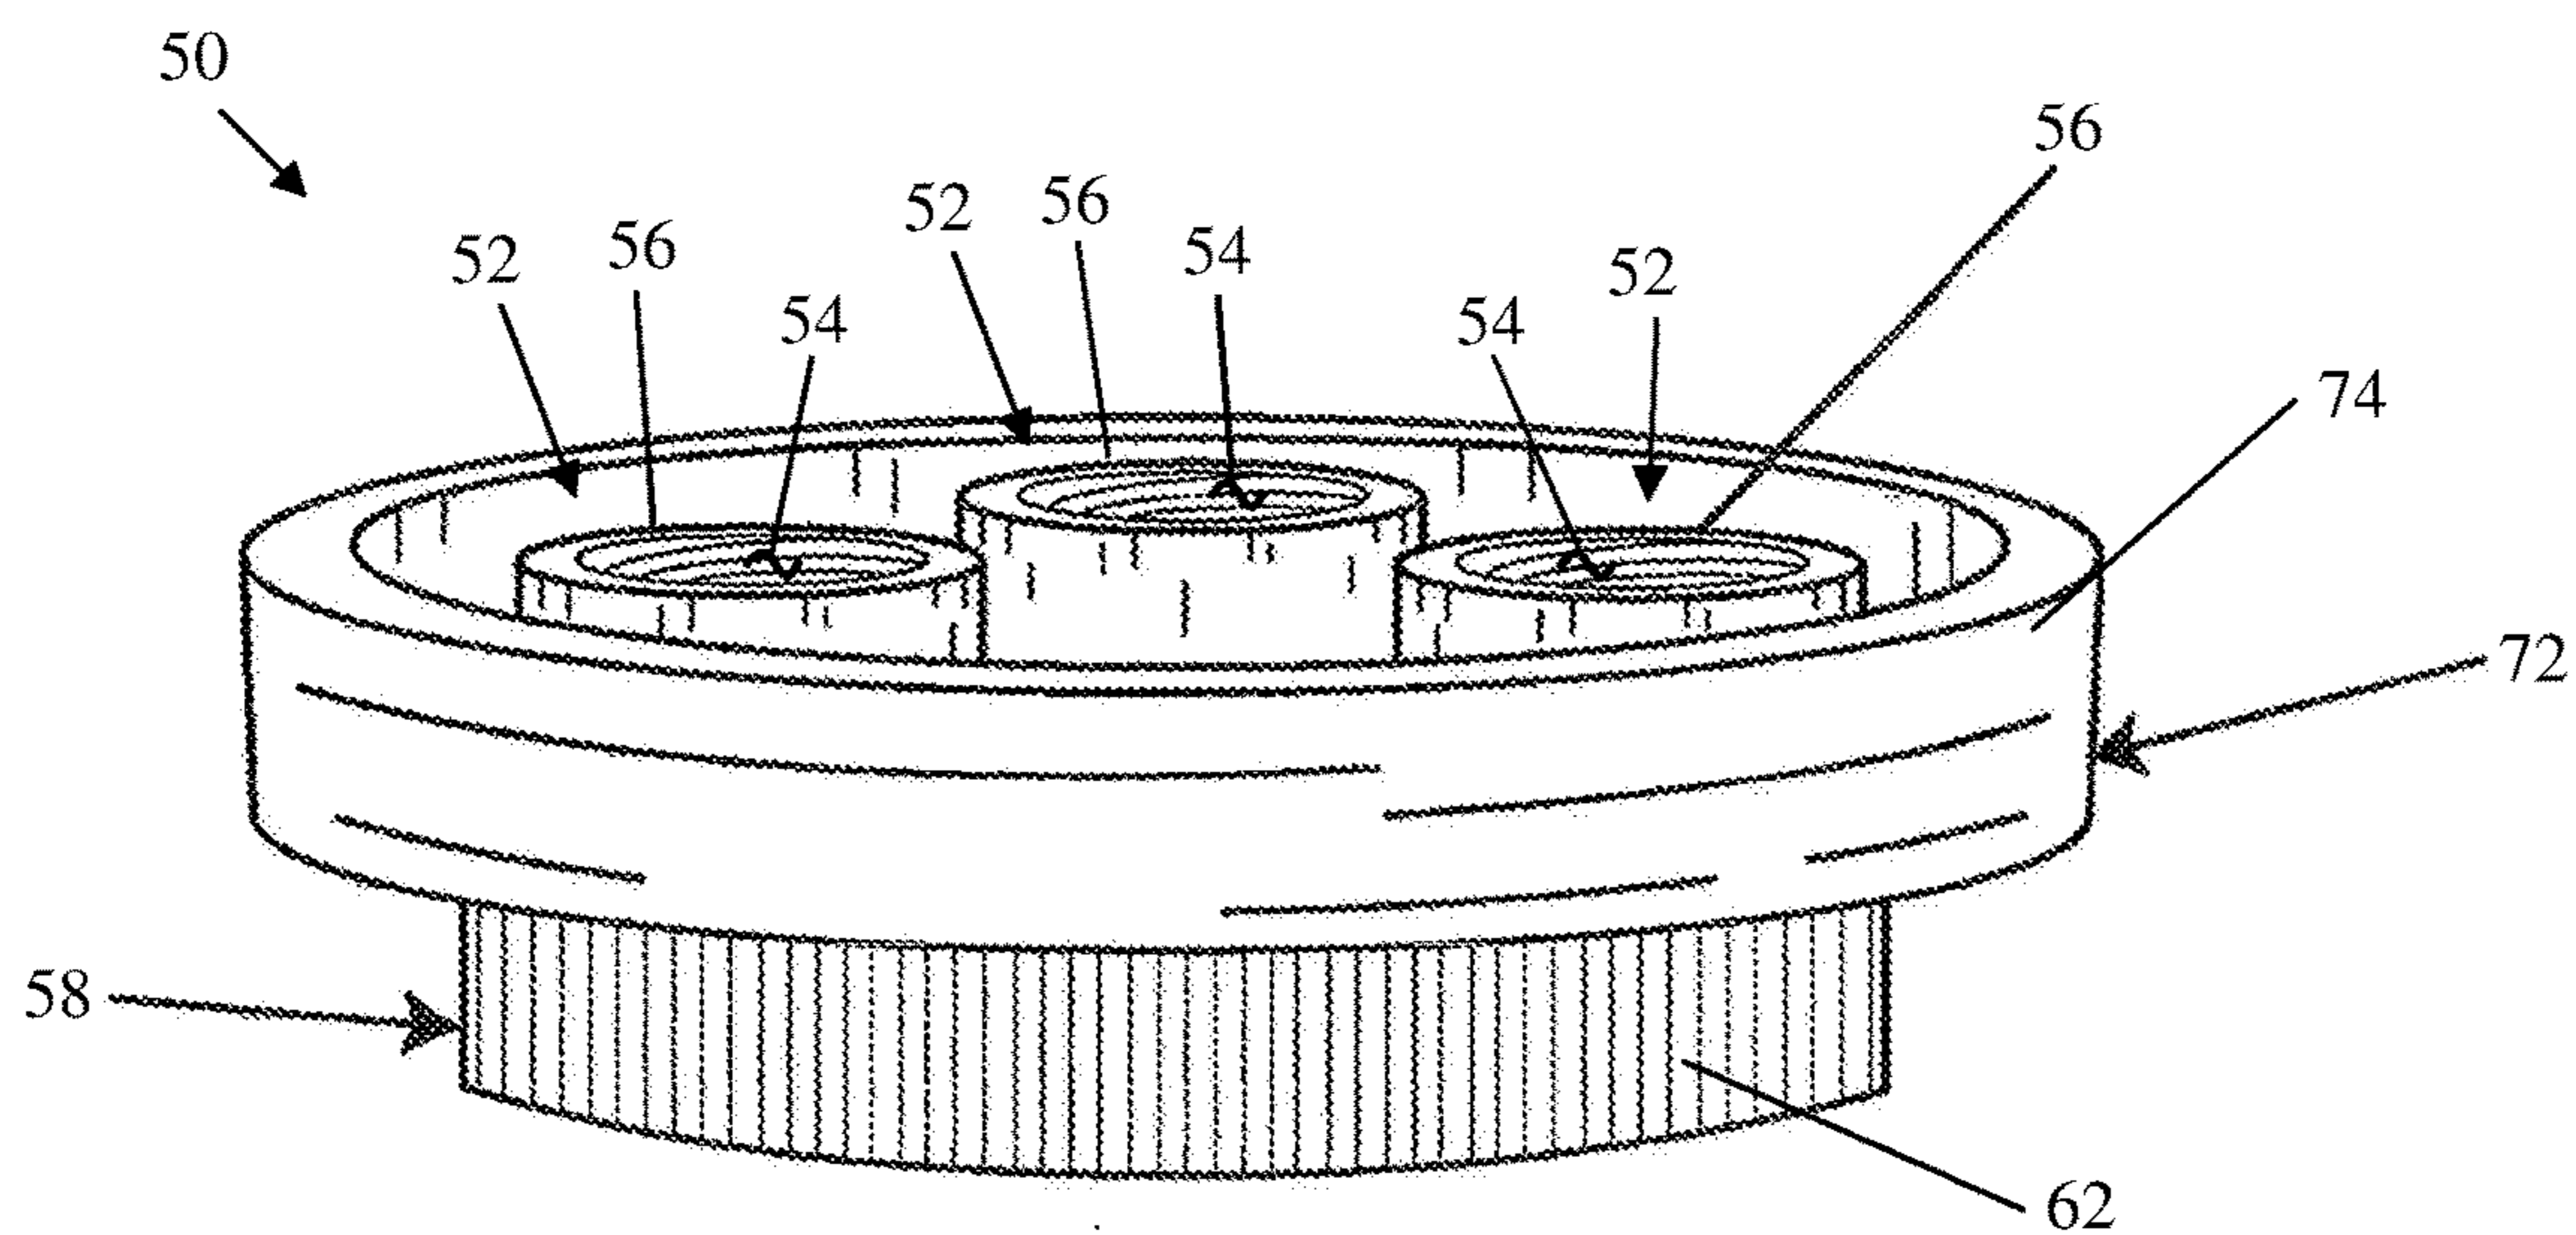


FIG. 5

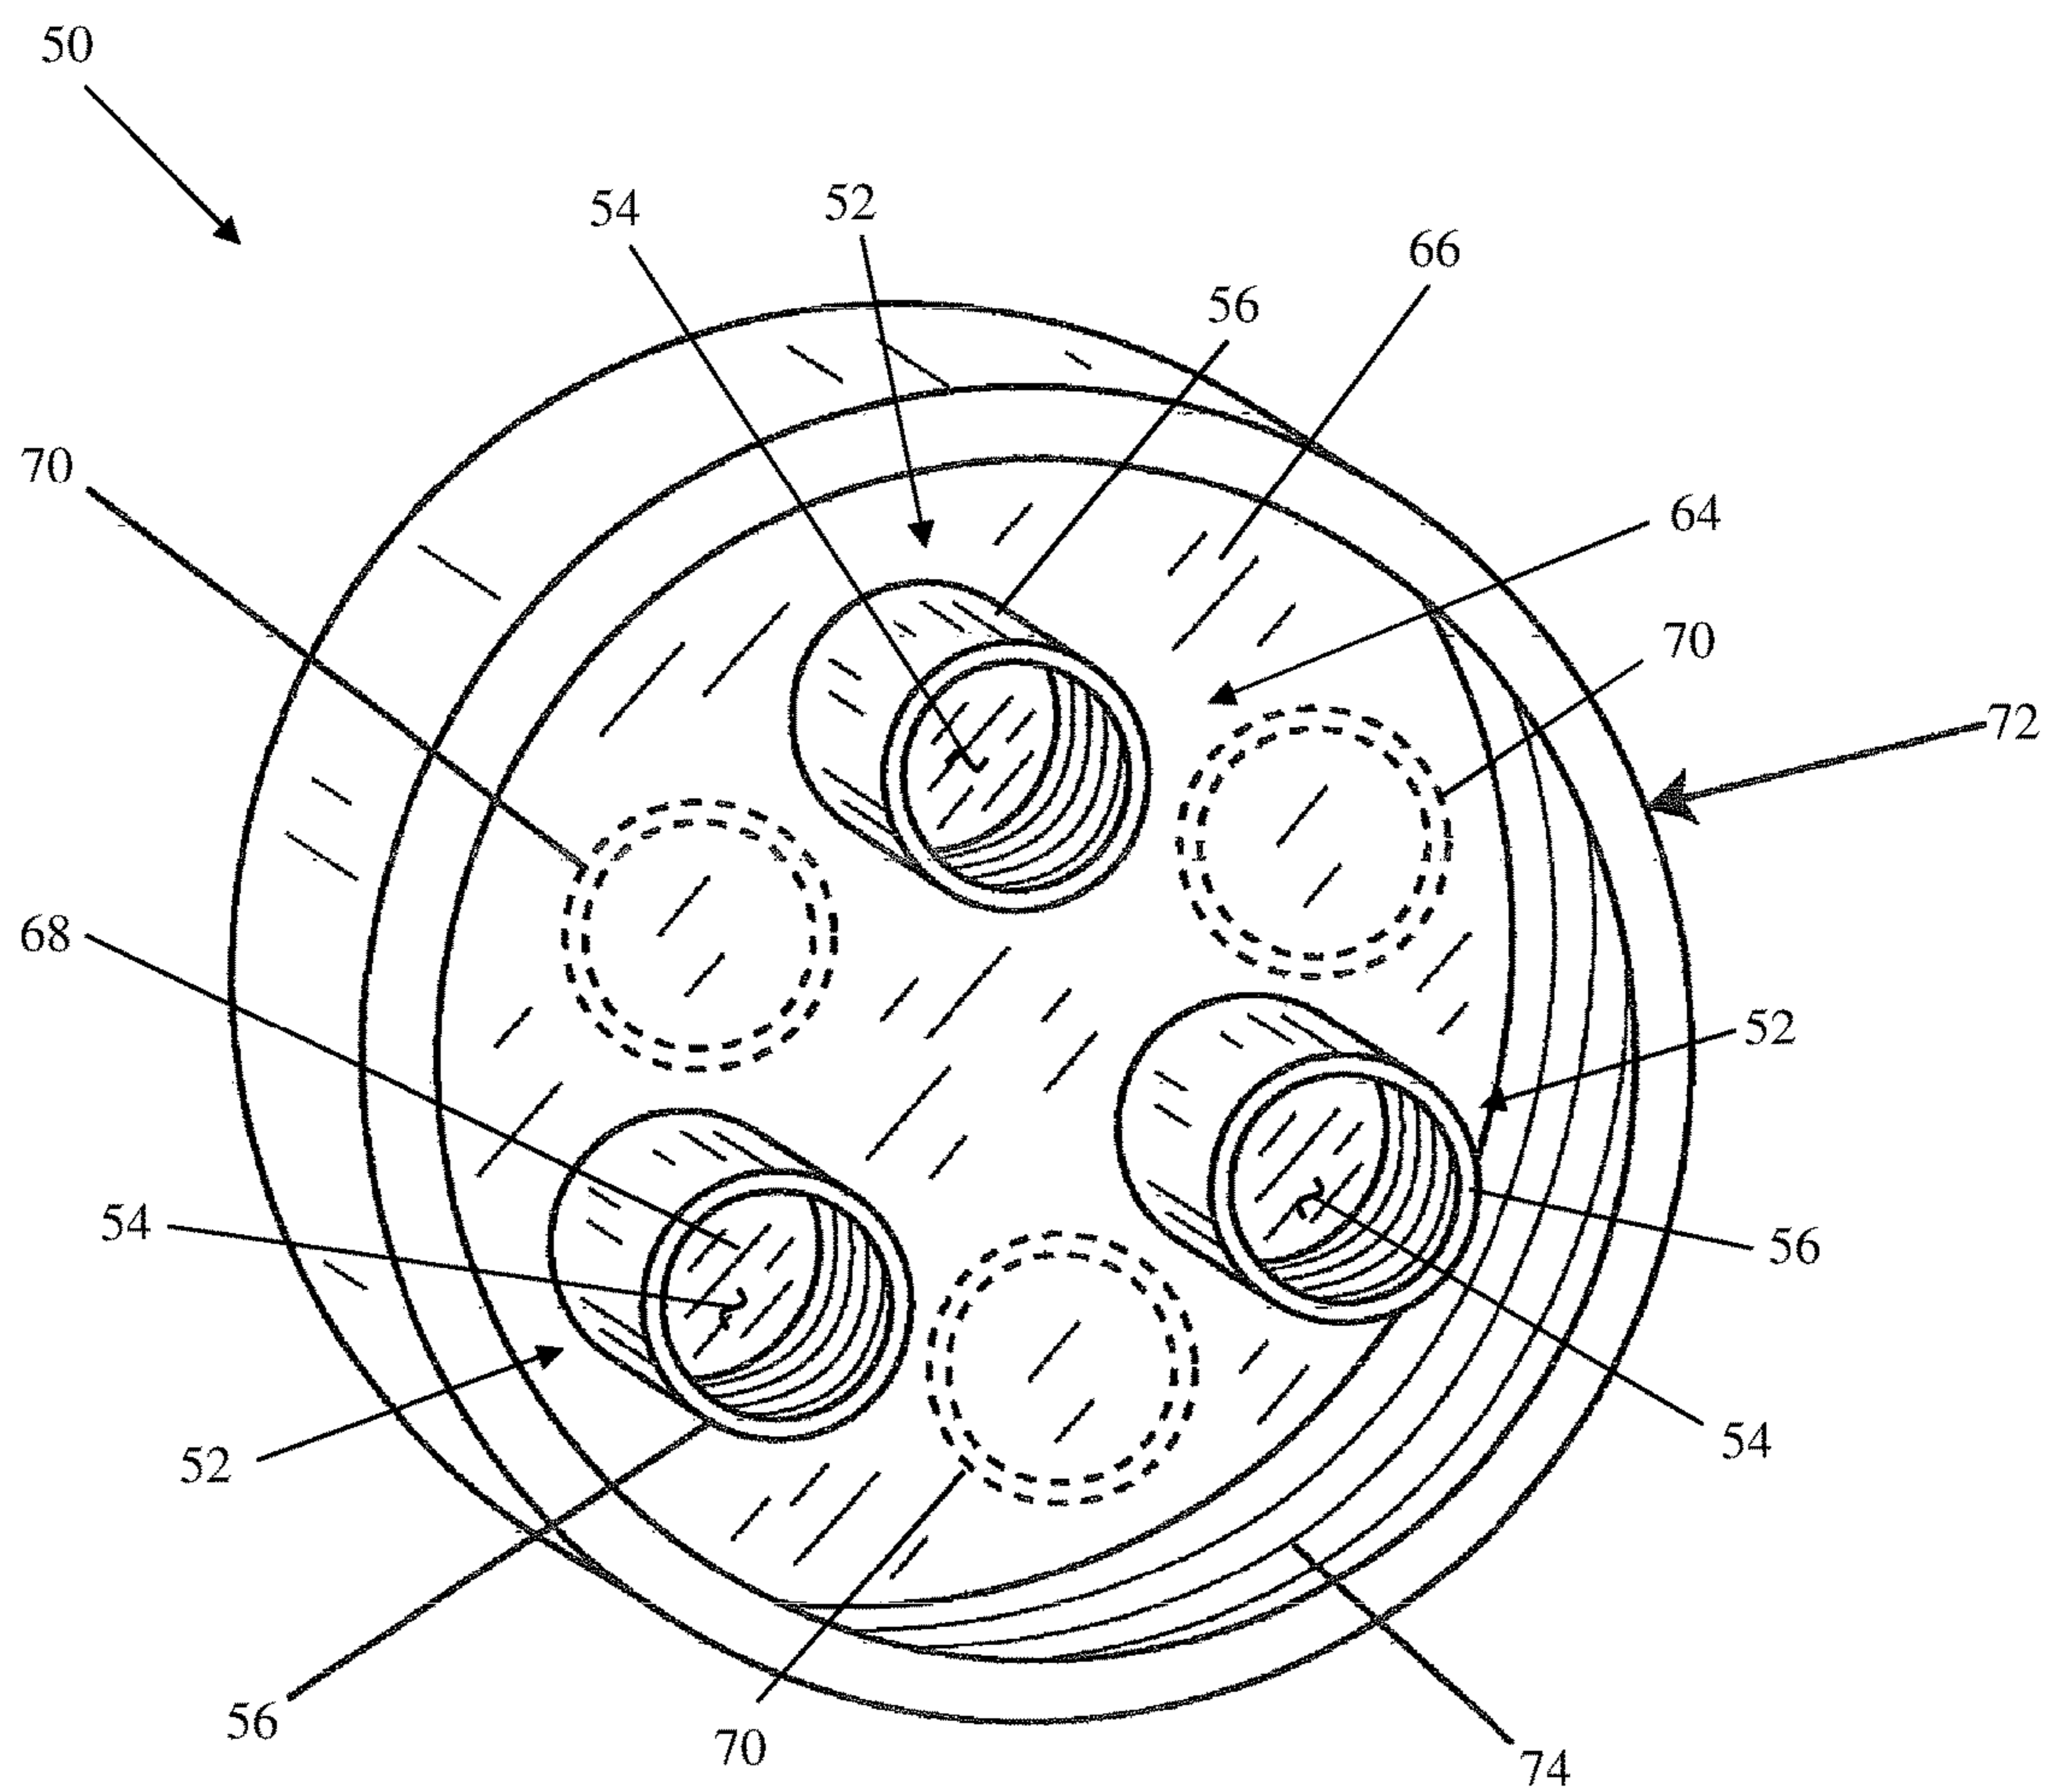


FIG. 6

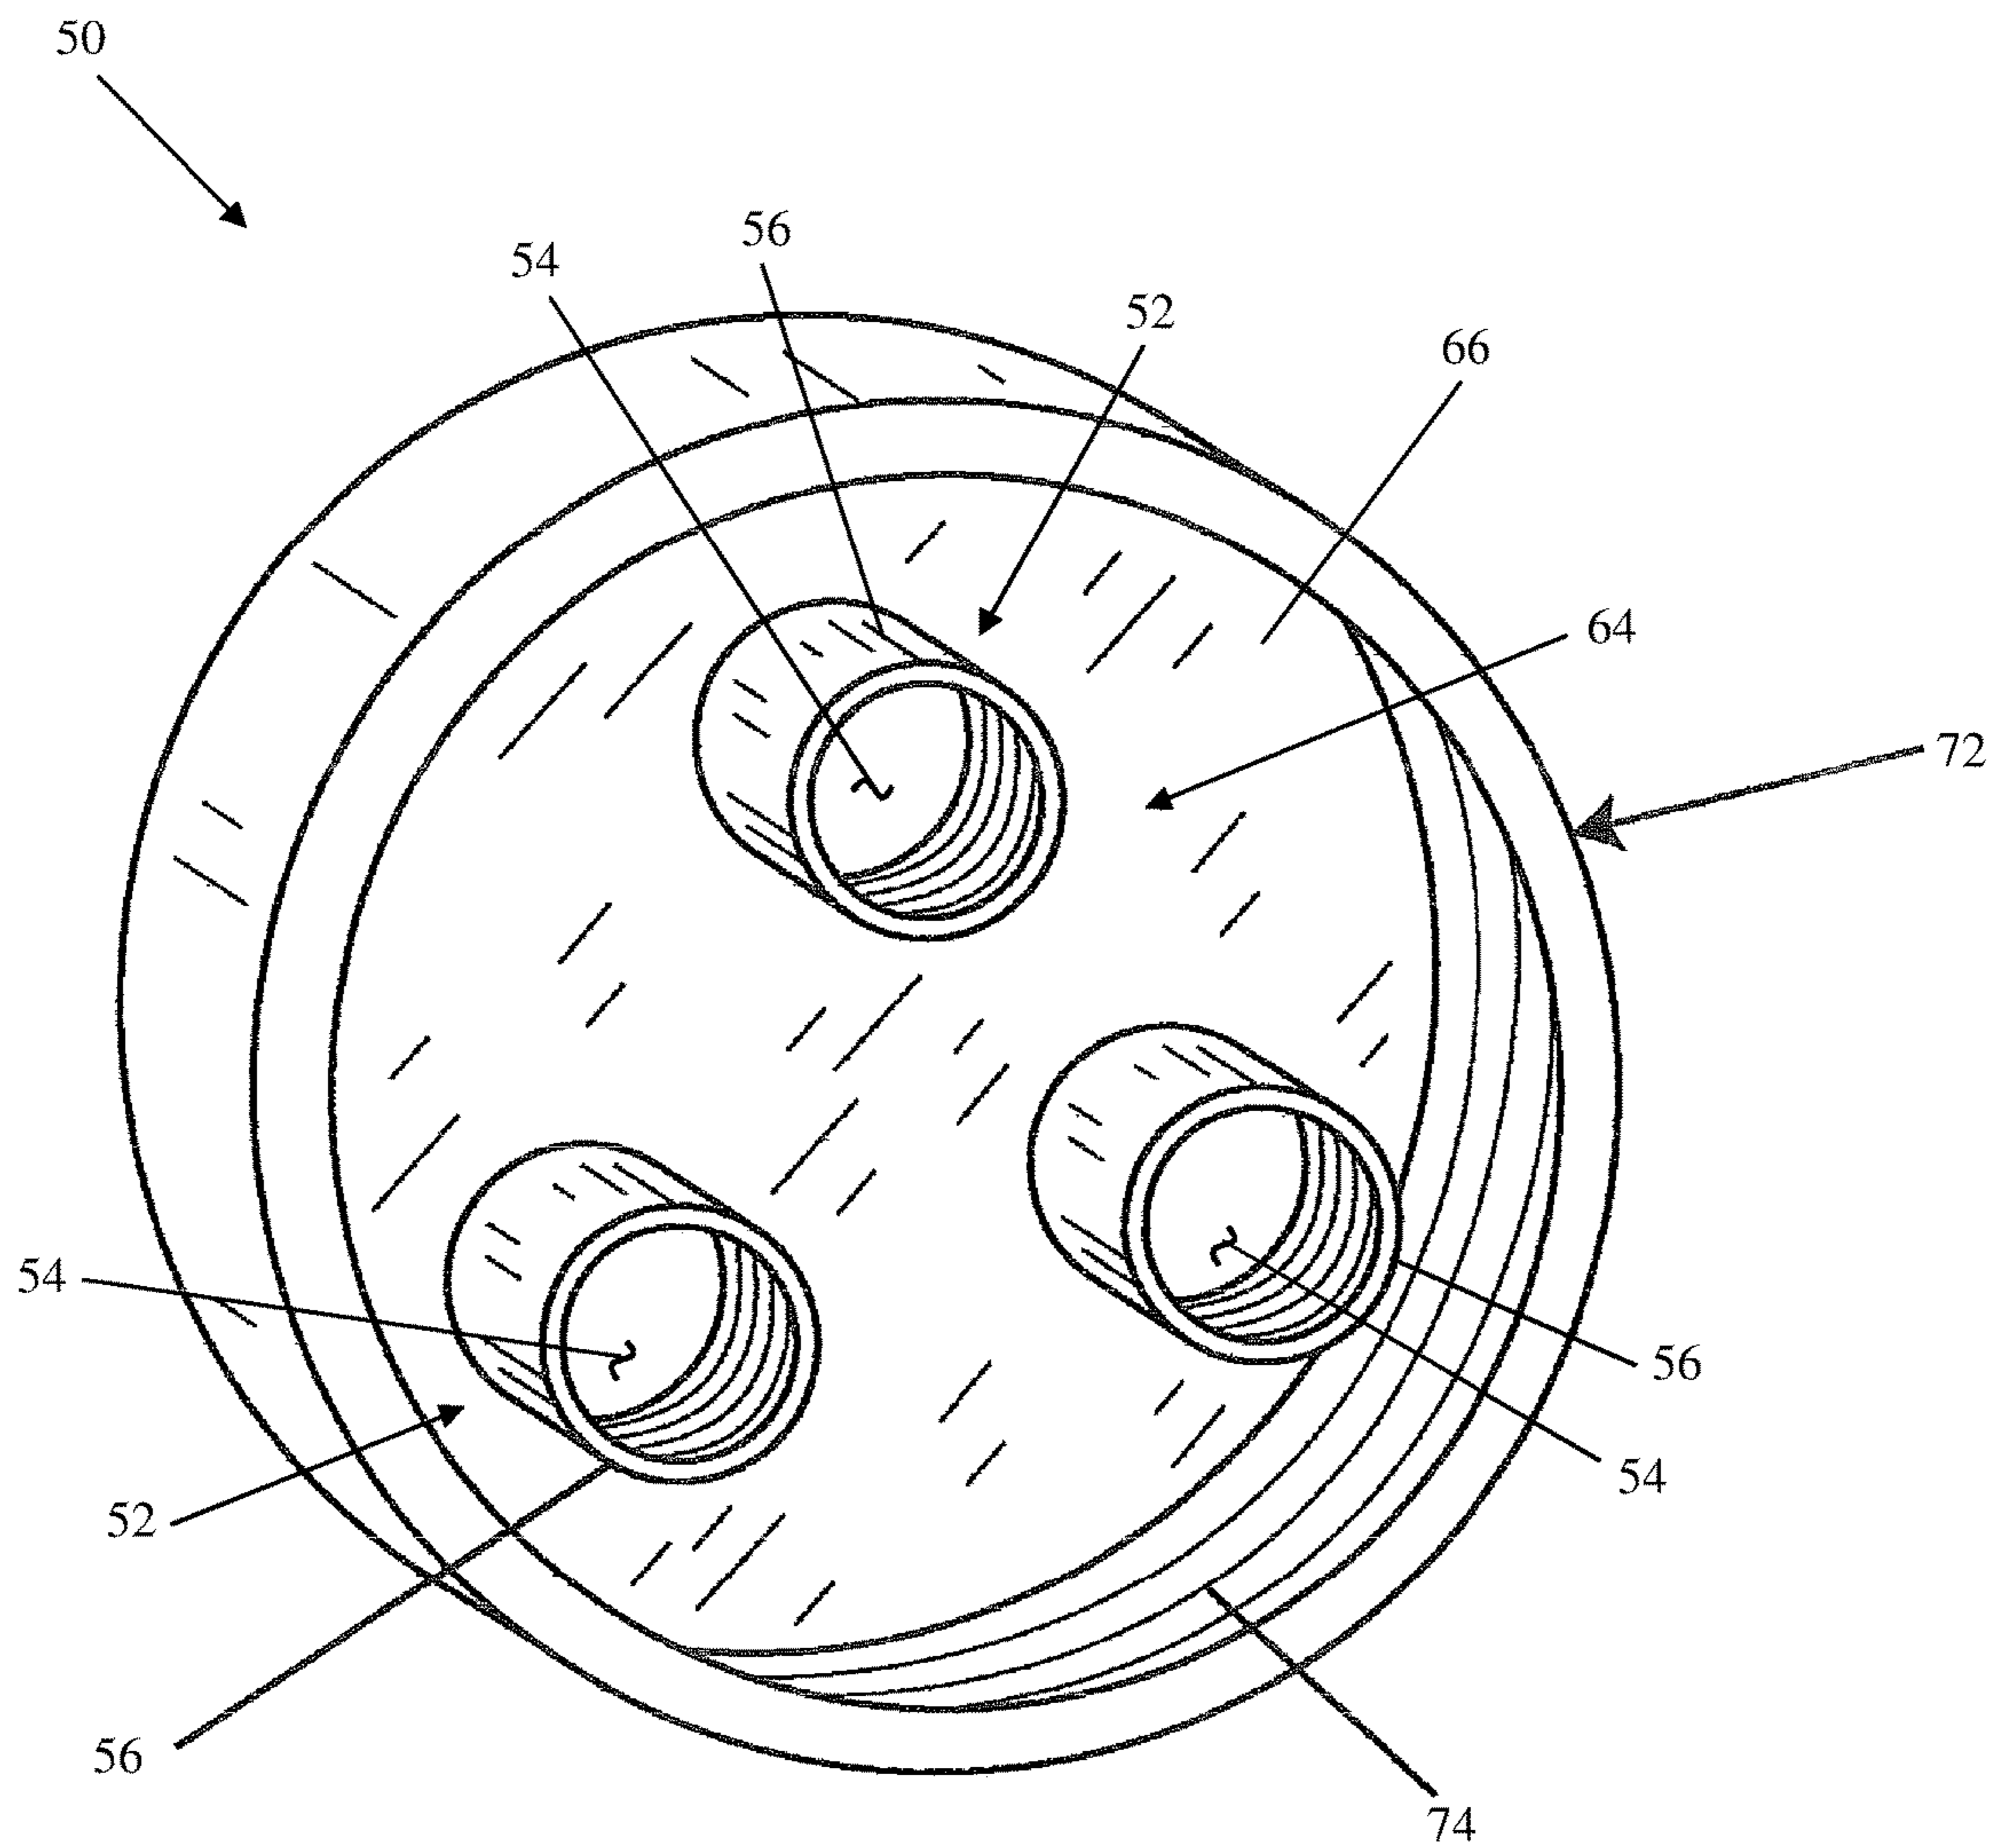


FIG. 7

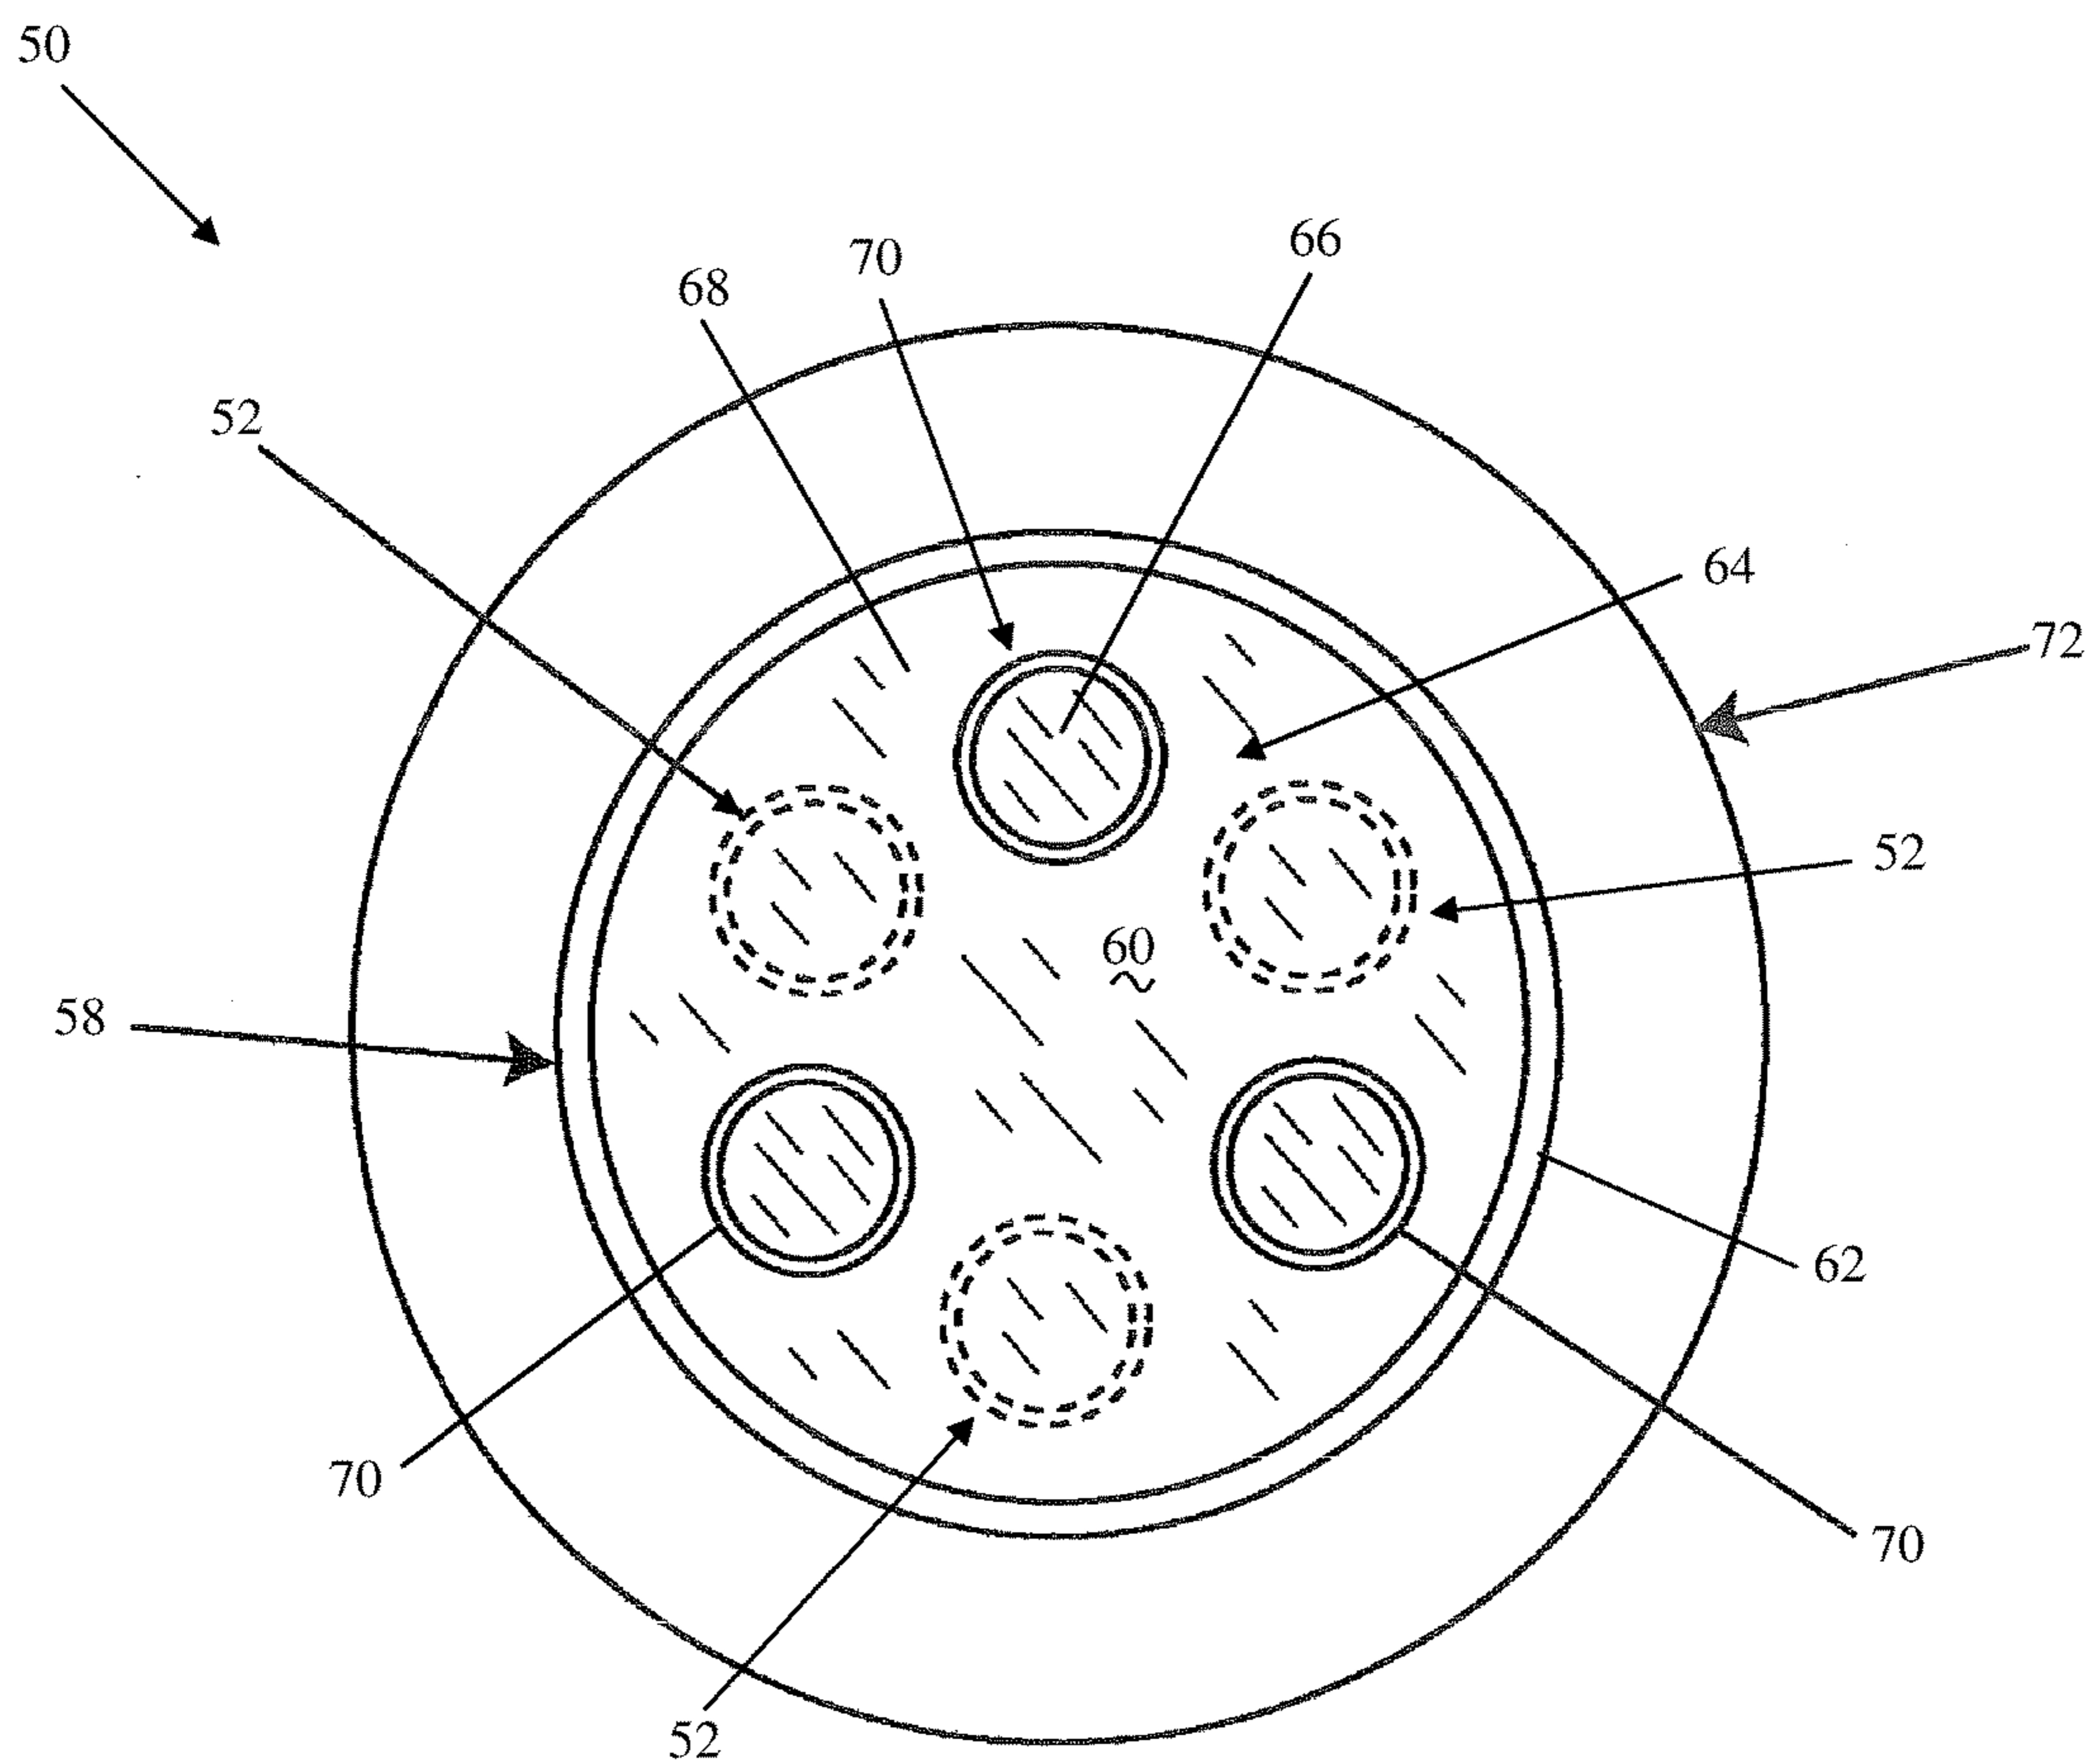


FIG. 8

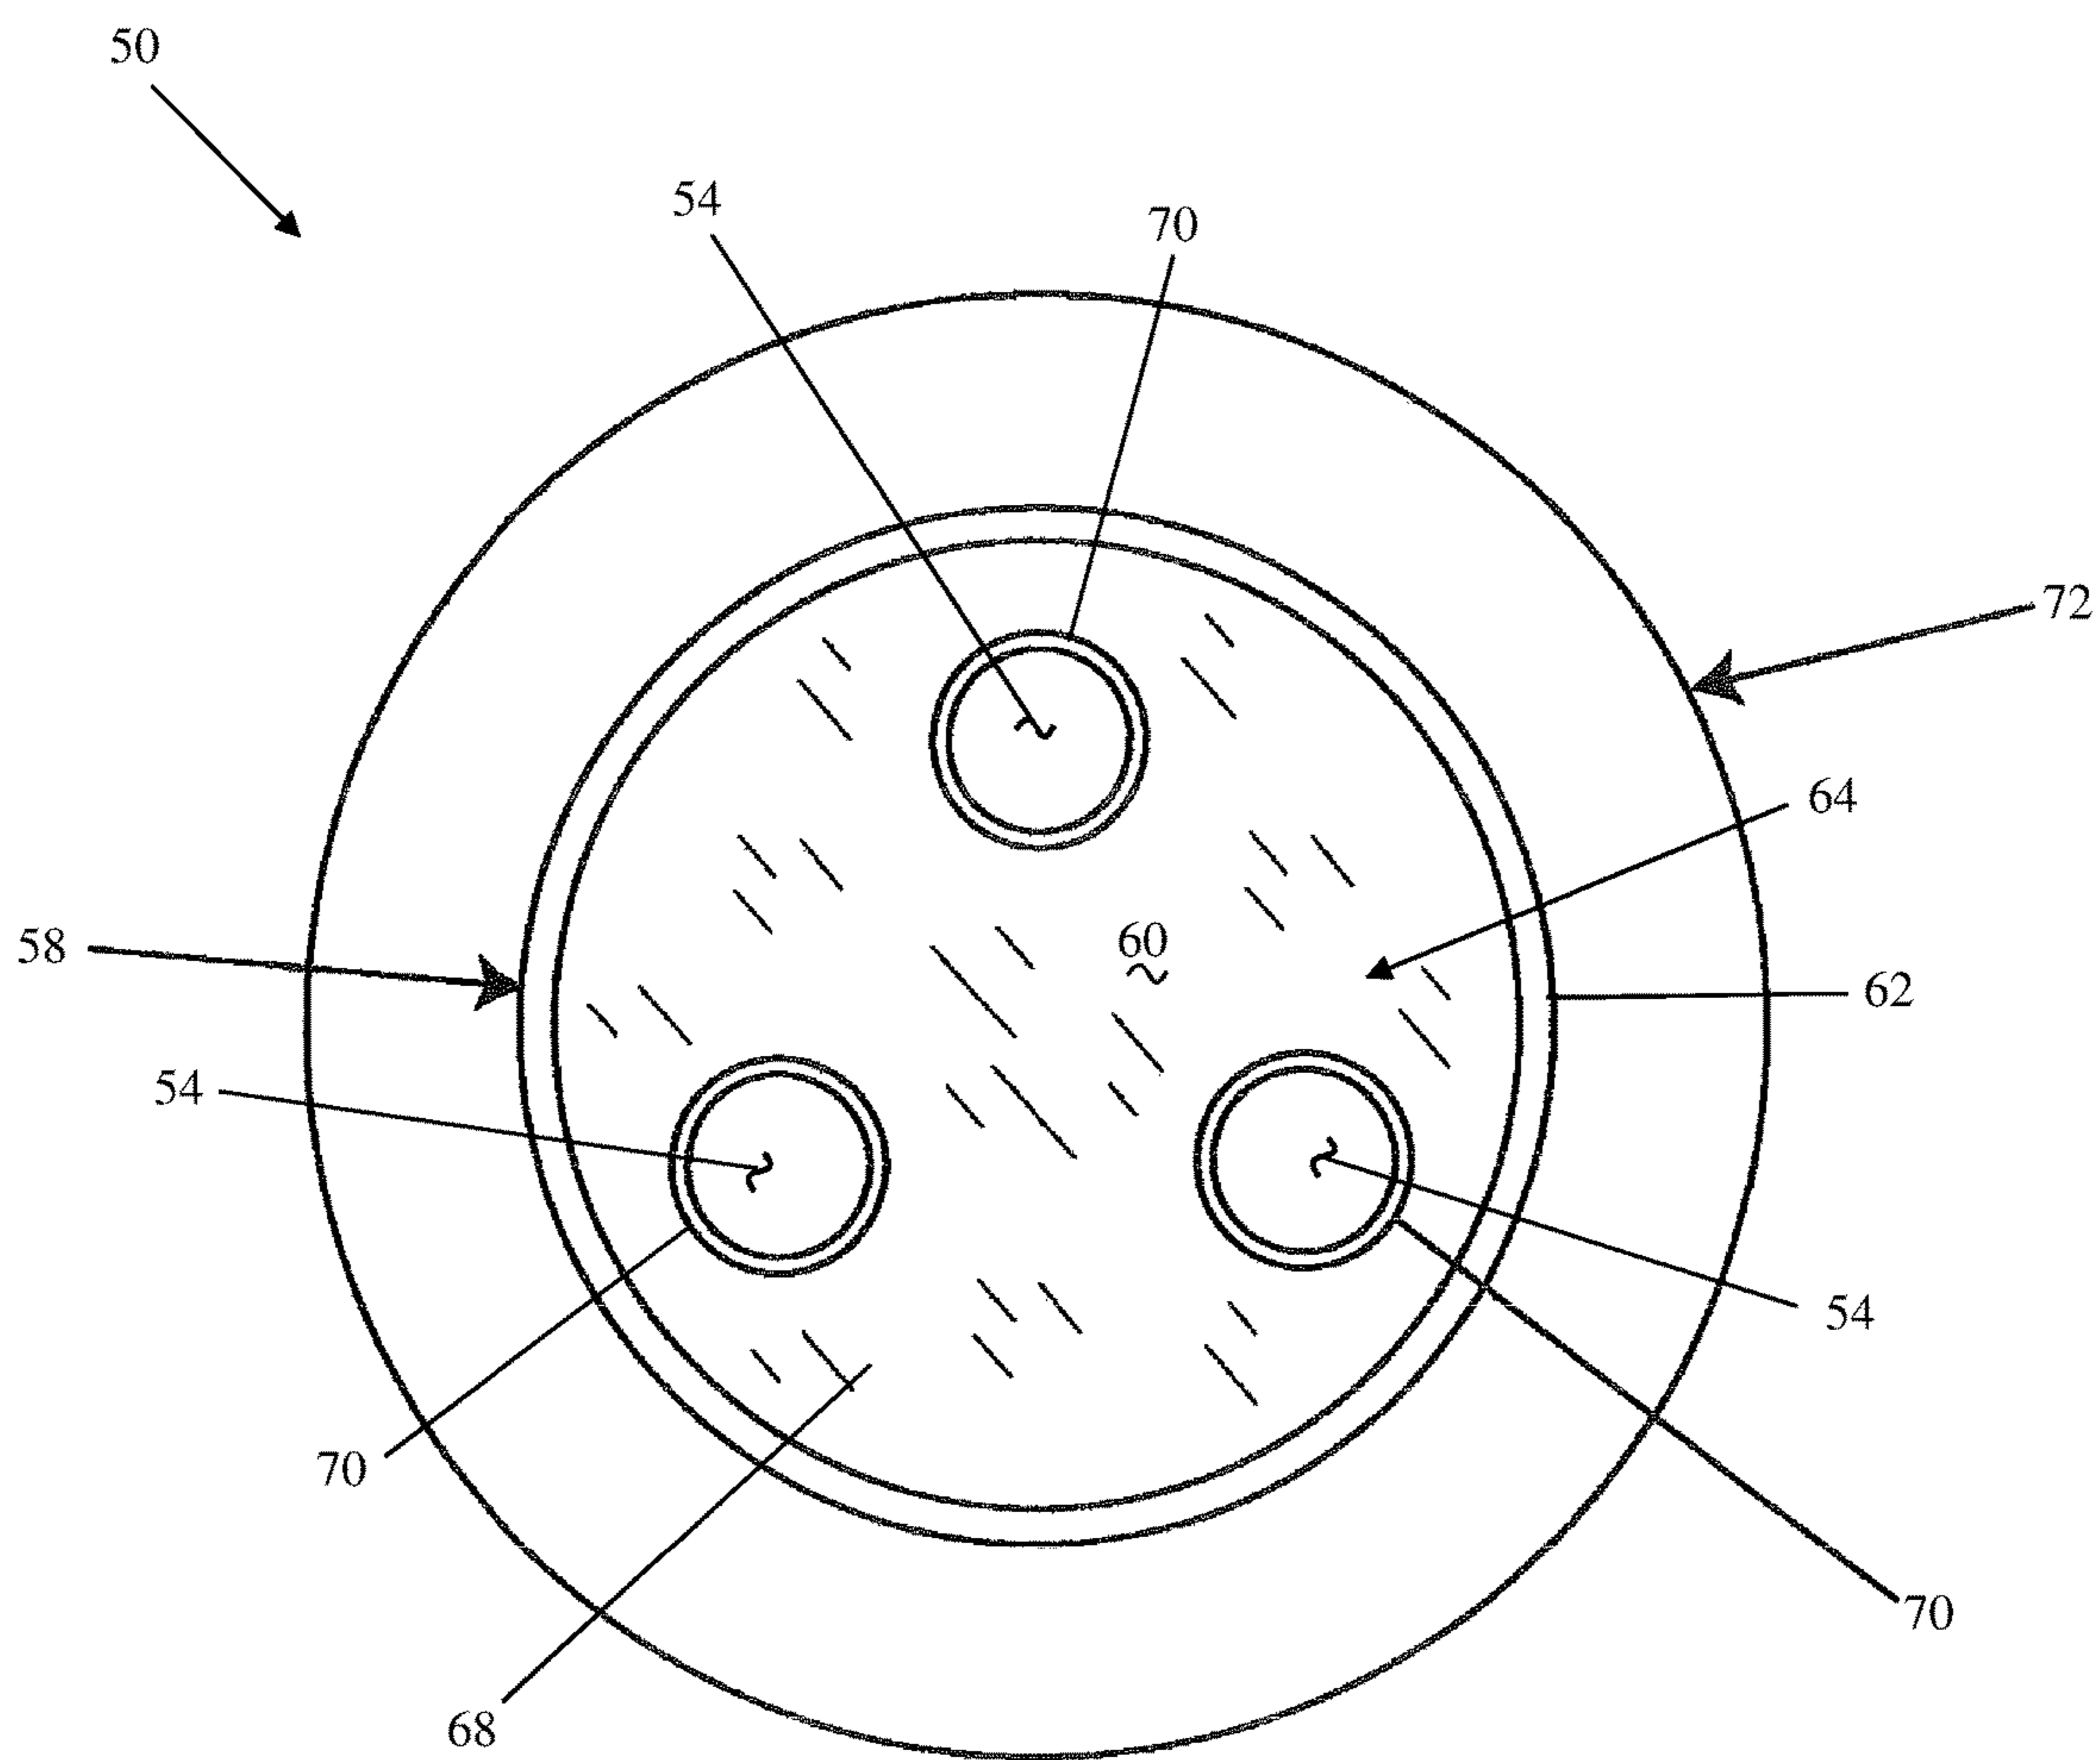


FIG. 9

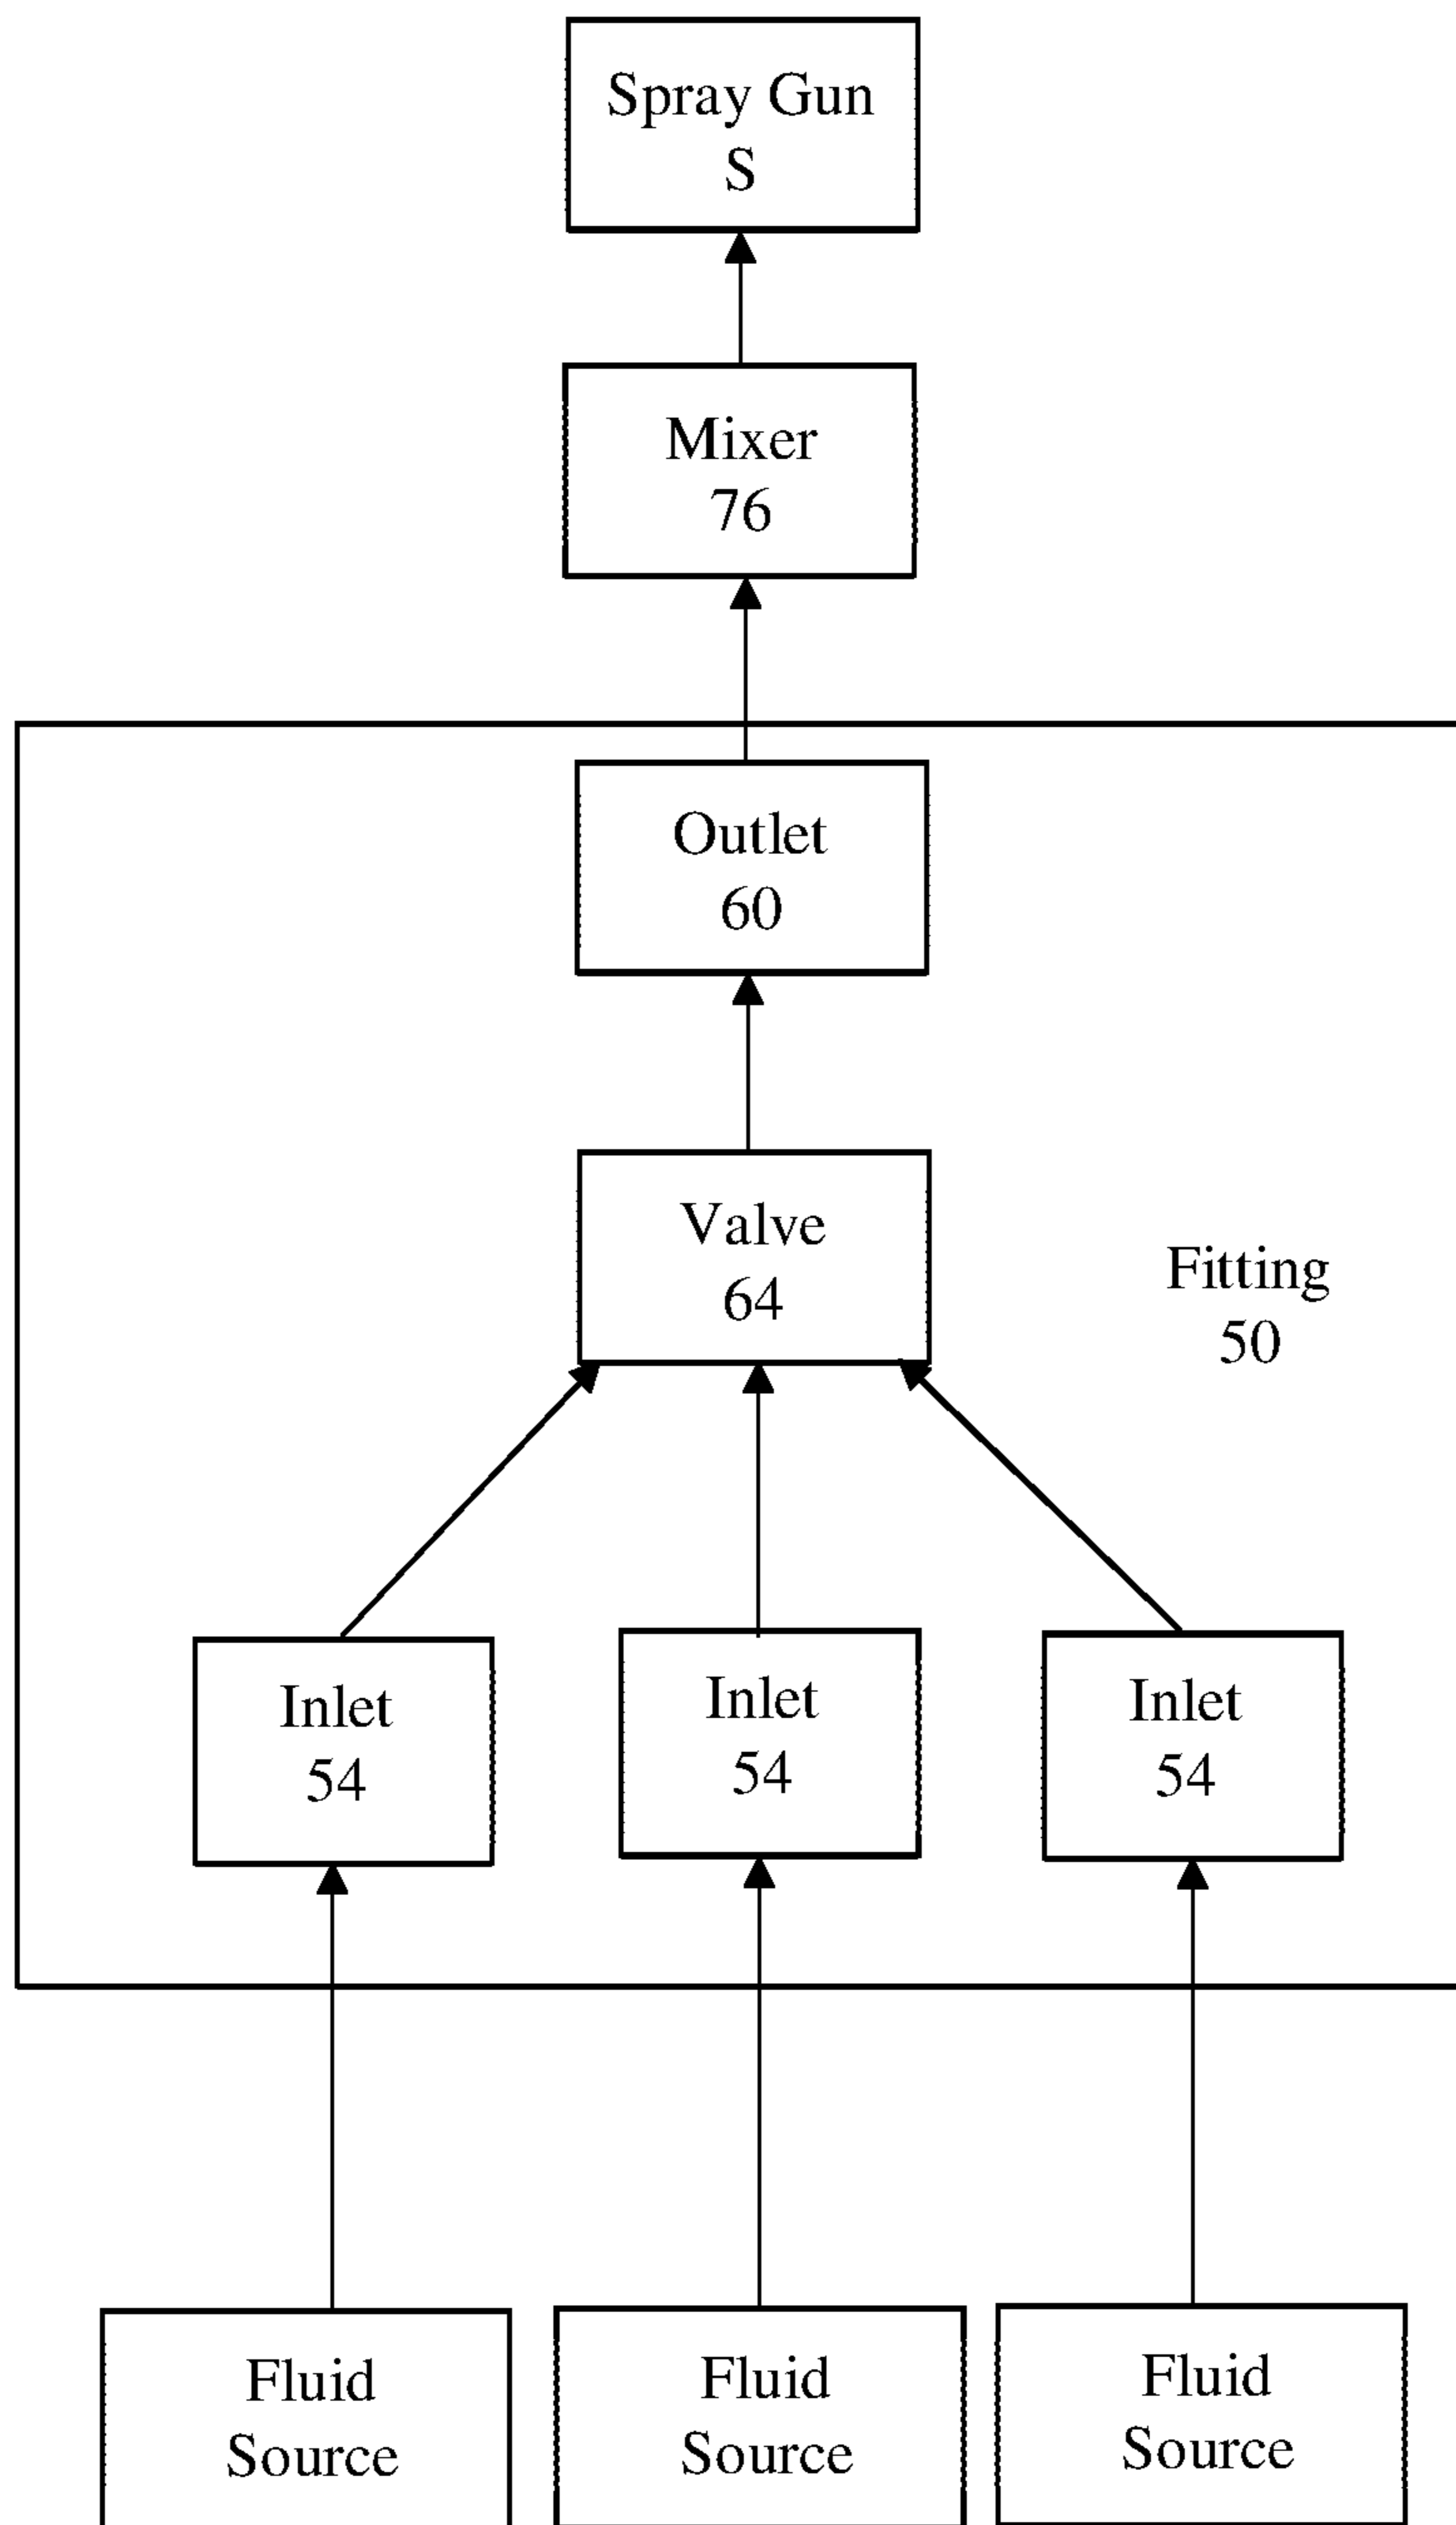


FIG. 10

CUP LINER AND A FITTING FOR A SPRAY GUN

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/763,964, filed Jul. 12, 2018, and U.S. Provisional Application No. 62/761,962, filed Apr. 12, 2018, the entireties of which are hereby incorporated by reference.

FIELD OF DISCLOSURE

[0002] The present disclosure generally relates to a spray gun for paint, and more specifically, a cup liner for a cup of the spray gun and a fitting for the spray gun.

BACKGROUND

[0003] People who spray paint cars generally pour the paint material into a spray paint cup. A lid covering the spray paint cup holds the paint material in the spray paint cup. The spray paint cup is attached to a spray paint gun and a painter applies the paint material contained within to the cup by using the spray gun. When the painter pulls the trigger on the spray gun, the paint material is fed or drawn into the spray gun from the cup and dispensed by the spray gun. Disposable paint cup liners are frequently used by painters to hold the paint material in the paint cup. Throwing away the paint cup liner allows for easier cleanup by eliminating the need to clean the paint cup. Sometimes, a painter needs to mix separate liquid components to initiate a chemical reaction there-between before the spraying the combination with the spray gun. Generally, the mixing of these paint materials happens before the materials are placed within the cup or in the cup itself. After mixing the separate paint materials, the combined mixture has to be used within a limited time frame, before the mixture starts to harden and become unusable. Moreover, painters generally mix more paint materials than required for a given project in order to ensure they have enough mixture to paint the project. As a result, any portion of the mixture left over after the painting is completed is thrown away as it is not possible to store the mixture for later use due to the hardening.

SUMMARY

[0004] In one aspect, a cup liner for a cup of a spray gun, the cup supporting two or more fluids to be dispensed by the spray gun, includes a fluid reservoir portion configured to be received in an interior of the cup. The fluid reservoir portion is configured to contain the two or more fluids. The fluid reservoir portion defines a reservoir configured to hold the two or more fluids. The fluid reservoir portion includes a divider portion disposed in the reservoir. The divider portion has one or more divider walls that divide the reservoir into two or more compartments. Each compartment is configured to contain one of the two or more fluids. The one or more divider walls separates each compartment such that each compartment is configured to separate the fluid contained therein from the fluids contained in the other compartments when the reservoir is filled with the two or more fluids. The fluid reservoir portion is configured to be fluidly connected to the spray gun when the fluid reservoir portion is received in the cup such that the spray gun can draw at least a portion

of each fluid from each of the two or more compartments to spray a mixture of the two or more fluids.

[0005] In another aspect, a fitting for a spray gun to connect the spray gun to two or more fluid sources, each fluid source having a fluid to be dispensed by the spray gun, includes two or more inlet interfaces. Each inlet interface defines an inlet to the fitting. Each inlet interface is configured to be coupled to a respective one of the two or more fluid sources such that the fluid of each fluid source is in fluid communication with the inlet defined by the respective inlet interface. The fitting also includes an outlet interface defining an outlet in fluid communication with each inlet. The outlet interface is configured to be coupled to the spray gun. The outlet interface is configured to provide fluid communication between the spray gun and the two or more fluid sources when the outlet interface is coupled to the spray gun and the two or more inlet interfaces are coupled to the two or more fluid sources such that the spray gun can draw at least a portion of each fluid from each of the two or more fluid sources to spray a mixture of the two or more fluids.

[0006] Other objects and features of the present disclosure will be in part apparent and in part pointed out hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a perspective of one embodiment of a cup liner for a cup of a spray gun according to the present disclosure;

[0008] FIG. 2 is a front perspective view thereof;

[0009] FIG. 3 is a top view thereof;

[0010] FIG. 4 is an exemplary schematic diagram of the flow of fluids from the cup liner to the spray gun.

[0011] FIG. 5 is a perspective of one embodiment of fitting for a spray gun according to the present disclosure that connects two or more fluid sources to the spray gun;

[0012] FIG. 6 is a top perspective of the fitting with a valve of the fitting in a closed configuration;

[0013] FIG. 7 is similar to FIG. 6, with the valve in an open configuration;

[0014] FIG. 8 is bottom view of the fitting with the valve in the closed configuration;

[0015] FIG. 9 is similar to FIG. 8, with the valve in the open configuration; and

[0016] FIG. 10 is an exemplary schematic diagram of the flow of fluids from the fluid sources to the spray gun via the fitting.

[0017] Corresponding reference characters indicate corresponding parts throughout the drawings.

DETAILED DESCRIPTION

[0018] Referring to FIGS. 1-4, one embodiment of a cup liner for a cup of a spray gun is generally indicated at reference numeral 10. The cup liner 10 is used to contain or hold two or more paint materials or fluids (not shown) to be dispensed by the spray gun S in the cup (not shown). Generally, the cup supports the two or more fluids that are dispensed by the spray gun S. Specifically, the cup liner 10 holds the two or more fluids in the cup. As will be explained in more detail below, the cup liner 10 separates each of the fluids from one another (e.g., keeps the fluids separate), preventing the fluids from prematurely mixing before being drawn into the spray gun S. Keeping the fluids separate, prevents the initiation of the chemical reaction and the

hardening of the resulting fluid mixture, allowing the fluids to be stored and used after the painting by the spray gun S is completed.

[0019] The cup liner 10 includes a fluid reservoir portion 12 configured to contain the two or more fluids. The fluid reservoir portion 12 defines a reservoir 14 configured to hold the two or more fluids. The fluid reservoir portion 12 is configured to be received in or inserted into an interior of the cup. In particular, the fluid reservoir portion 12 is sized and shaped to substantially conform to the walls of the cup (e.g., correspond to the size and shape of the cup's interior). As shown in FIGS. 1 and 2, the fluid reservoir portion 12 is generally cylindrical. This allows the fluid reservoir portion 12 to conform to the generally cylindrical shape of the cup's interior. The illustrated fluid reservoir portion 12 is also slightly tapered to conform to the slight taper typical in most cups. The fluid reservoir portion 12 includes a lower wall 22 and a cylindrical outer wall 24 extending upward from the lower wall. The lower and outer walls 22, 24 at least partially define the reservoir 14. When the cup liner 10 is received in the cup, the lower wall 22 is generally adjacent to and/or abuts or engages a lower wall of the cup and the outer wall 24 is generally adjacent to and/or abuts or engages an interior wall of the cup that defines the cup's interior. The outer wall 24 has a longitudinal axis LA extending between the upper and lower ends of the fluid reservoir portion 12 (FIG. 2). In the illustrated embodiment, the longitudinal axis LA defined by the outer wall 24 extends through the center of the fluid reservoir portion 12.

[0020] The fluid reservoir portion 12 includes a divider portion 16 disposed in the reservoir 14. The divider portion 16 divides the reservoir 14 into two or more compartments 18. The divider portion 16 has one or more divider walls 20 dividing the reservoir 14 into the two or more compartments 18. Each compartment 18 is configured to contain one of the two or more fluids. In the illustrated embodiment, the fluid reservoir portion 12 includes three (broadly, at least two) compartments 18, although more or less compartments are within the scope of the present disclosure. The compartments 18 may all be of generally equal size (e.g., volume) or at least two, including all, of the compartments may be of different or unequal size. For example, the size of the compartments may correspond to the ratio of components used in the spray mixture in one or more embodiments. In the illustrated embodiment, each divider wall 20 is connected to the lower and outer walls 22, 24. Each divider wall 20 extends upward from lower wall 22 toward the upper end of the fluid reservoir portion 12. In one embodiment, an upper edge margin of each divider wall 20 is coplanar with an upper edge margin of the outer wall 24. In another embodiment, the upper edge margin of each divider wall 20 may be disposed either above or below the upper edge margin of the outer wall 24. The illustrated divider portion 16 includes three divider walls 20, although more or less divider walls are within the scope of the present disclosure. The three divider walls 20 each have a lower edge margin connected to the lower wall 22, a first side edge margin connected to the outer wall 24 and an opposite second side edge margin connected to the other divider walls. As shown in FIGS. 1 and 2, the three divider walls 20 are all connected together along the longitudinal axis LA. The three divider walls 20 divide the reservoir 14 into the three compartments 18.

[0021] The divider portion 16 separates the compartments 18 from one another to prevent the fluids contained in each compartment from mixing. The one or more divider walls 20 separate each compartment 18 from one another such that each compartment is configured to separate the fluid contained therein from the fluids contained in the other compartments when the reservoir 14 is filled with the two or more fluids. In this manner, the cup liner 10 separates the fluids contained in each compartment 18 from one another to prevent the fluids from mixing. The fluid reservoir portion 12 is configured to be fluidly connected to the spray gun S when the fluid reservoir portion is received in the cup such that the spray gun can draw at least a portion of each fluid from each of the two or more compartments 18 to spray a mixture of the two or more fluids.

[0022] In one embodiment, the fluid reservoir portion 12 may include a lip (not shown) connected to the upper edge margin of the outer wall 24 and extending radially outward (e.g., extending in a direction generally perpendicular to the longitudinal axis LA) therefrom. The lip extends circumferentially around the fluid reservoir portion 12 and is configured to engage a rim of the cup when the fluid reservoir portion is received in the interior of the cup. As generally understood in the art, the lip of the fluid reservoir portion 12 is sandwiched between a collar threadably secured to the cup and the rim of the cup to secure the fluid reservoir portion 12 to the cup.

[0023] The cup liner 10 may also include an interface 26 coupled to the fluid reservoir portion 12. The interface 26 provides fluid communication between the spray gun S and the reservoir 14 of the fluid reservoir portion 12 such that the spray gun can draw at least a portion of each fluid from each of the two or more compartments 18 to spray (e.g., dispense) a mixture of the two or more fluids. The interface 26 includes a circumferential wall 28 that defines a passageway 30. The passageway 30 defined by the interface 26 is in fluid communication with each of the two or more compartments 18 of the fluid reservoir portion 12. The passageway 30 is configured to be in fluid communication with the spray gun S when the interface 26 is coupled to the spray gun. Thus, the passageway 30 provides fluid communication between the spray gun S and each compartment 18 of the fluid reservoir portion 12 when the interface 26 is coupled to the spray gun. The interface 26 is configured to be coupled to the spray gun S. In one embodiment, the circumferential wall 28 may include interior or exterior threads to threadably connect to the spray gun S. In another embodiment, the circumferential wall 28 may include protrusions and/or detents to connect the interface 26 to the spray gun S. Other ways of connecting the interface 26 to the spray gun S are within the scope of the present disclosure.

[0024] In one embodiment, the interface 26 is fixed to the fluid reservoir portion 12. For example, in the illustrated embodiment, the fluid reservoir portion 12 includes an upper wall 32 (that defines a portion of the reservoir 14 and each compartment 18) and the interface 26 is fixed to the upper wall. In this embodiment, the upper wall 32 is connected to the divider walls 20 and the outer wall 24 (at the upper edge margins thereof) and generally closes the upper end of the each compartment 18. In another embodiment, the interface 26 (or a portion thereof) is releasably coupled to the fluid reservoir portion 12. For example, the interface 26 may be releasably coupled to the upper wall 32. In another example, the interface 26 includes the upper wall 32 and the upper

wall is releasably coupled to the fluid reservoir portion 12 (broadly, the interface is releasably or removably coupled to the reservoir portion). In any of these embodiments, the interface 26 sealingly engages the fluid reservoir portion 12 to inhibit or prevent the two or more fluids contained in the reservoir from mixing. For example, if the fluid reservoir portion 12 includes the upper wall 32, the interface 26 sealingly engages (e.g., creates a fluid tight seal with) the upper wall to prevent any fluid from moving between the upper wall and interface. Similarly, if the interface 26 includes the upper wall 32, the upper wall sealingly engages the divider portion 16 (e.g., the one or more divider walls 20) and the outer wall 24 to prevent any fluid from moving there-between. In these embodiments, the upper wall 32 may include one or more openings aligned with each compartment 18 and the passageway 30 to fluidly connect each compartment with the passageway.

[0025] The interface 26 is configured to selectively close each compartment 18 of the fluid reservoir portion to inhibit the two or more fluids contained in the reservoir 14 from mixing and/or from being drawn into the spray gun S. The interface 26 is also configured to selectively open each compartment 18 of the fluid reservoir portion 12 to permit the spray gun S to draw at least a portion of each fluid from each of the two or more compartments to spray a mixture of the two or more fluids. Preferably, the interface 26 includes one or more valves 34 disposed between the passageway 30 and the two or more compartments 18. In the illustrated embodiment, a single valve 34 is disposed between and connected to each of the compartments 18 and the passageway 30. In other embodiments, the interface 26 may include a dedicated valve to each compartment 18 that can be operated independently of the other valves. The one or more valves 34 have an open configuration (FIG. 1) and a closed configuration (FIG. 3). The one or more valves 34 close the two or more compartments 18 of the fluid reservoir portion 12 (e.g., fluidly disconnect each compartment from the passageway 30 and, therefore, from one another) to inhibit the two or more fluids contained in the reservoir 14 from mixing and/or from being drawn by the spray gun S when the one or more valves are in the closed configuration. The one or more valves 34 open the two or more compartments 18 of the fluid reservoir portion 12 (e.g., fluidly connect each compartment with the passageway 30 and, therefore, with one another) to permit the spray gun S to draw at least a portion of each fluid from each of the two or more compartments to spray a mixture of the two or more fluids when the valve is in the open configuration.

[0026] In the illustrated embodiment, the valve 34 is selectively opens and closes the compartments 18 together. Referring to FIG. 3, the illustrated valve 34 includes a stationary plate 38 defining at least one opening 36 aligned with the openings in the top wall 32. Thus, each opening 36 is aligned with at least one of the openings in the top wall 32 for each compartment 18. The valve 34 includes a selectively rotatable plate 40, relative to the stationary plate 38, configured to move between open and closed positions to open and close the valve. The rotatable plate 40 defines openings 42 (broadly, two or more openings). The openings 36 are shown in phantom in FIG. 3. Each opening 42 is configured to align with one of the openings 36 of the stationary plate 38 when the rotatable plate is in the open position (e.g., the valve 34 is in the open configuration) so that the valve is open (FIG. 1) and each opening 42 is

configured to be misaligned with all of the openings 36 when the rotatable plate is in the closed position (e.g., the valve is in the closed configuration) so that the valve is closed (FIG. 3). Rotating the rotatable plate 40 relative to the stationary plate 38 selectively opens and closes the valve 34 (e.g., moves the openings 42 into and out of alignment with openings 36). The use of other types and styles of valves are within the scope of the present disclosure. In one embodiment, the interface 26 may include a mesh screen disposed between the compartments 18 and the valve 34 to filter each fluid before the fluids enter the valve. The one or more valves 34 may provide a visual indication if the valve is open or closed. For example, a painter can visually observe whether or not the openings 36, 42 are aligned or indicia may be provided on the valve to indicate if the valve is open or closed.

[0027] Referring to FIGS. 1-4, in operation, the fluid contained in each compartment 18 is drawn out of each compartment 18, through the valve 34 and into the passageway 30 before entering the spray gun S (FIG. 4). The fluids mix in the passageway 30 and continue to mix as the fluids (e.g., fluid mixture, fluid combination) move through and out of the spray gun S. In one embodiment, a mixer 76 may be connected to and between the interface 26 and the spray gun S to mix the two or more fluids before the fluids enter the spray gun (FIG. 4). The mixer 76 may be any suitable device configured to mix or agitate a flow of fluid there-through, such as by introducing or creating turbulence in the flow of fluids. For example, the mixer 76 may include one or more protrusions, guides, and/or projections that extend into the flow and/or redirect the flow of the fluids to effectuate mixing. The mixer 76 may be disposable (e.g., configured to be used once and then thrown away). In certain embodiments, the one or more valves 34 act as a proportional metering device, permitting a proportional amount of each fluid (relative to the amounts of the other fluids) to flow out of each compartment 18 in order to achieve the correct mixing ration of the two or more fluids. For example, in the illustrated embodiment, the openings 36 are generally equal in size (e.g., cross-sectional area taken relative to the direction of flow) resulting in generally equal proportions of each fluid flowing into the passageway 30 and into the spray gun S. Openings 36 of generally unequal size would result in unequal proportions of each fluid flowing into the passageway. Accordingly, by controlling the size of the opening the fluid from each compartment 38 flows through, the relative proportions of each fluid dispensed by the spray gun S can be controlled. In this manner, the desired mixing ratio of the two or more fluids can be obtained. In addition, the one or more valves 34 can be partially opened (e.g., partially closed) to control the mixing ratio of the two or more fluids. For example, in an embodiment where each compartment 18 has a dedicated, independently operatable valve 34, the mixing ratio of the two or more fluids can be established by selectively determining the extent each valve is opened. Other ways of metering the fluids from the compartments to the spray gun can also be used in one or more embodiments.

[0028] In one embodiment, the lower, outer, divider and upper walls 22, 24, 20, 32 are made of flexible and/or rigid plastic. The plastic may be opaque or transparent. The lower, outer, divider and upper walls 22, 24, 20, 32 are show as being transparent in FIGS. 1-3.

[0029] In one embodiment, the cup liner 10 is pre-filled with fluids in each of the compartments 18. In this embodi-

ment, a painter need only select the cup liner with the desired fluids already contained therein. For example, each of the two or more compartments can be pre-filled, by the manufacturer, with one of the two or more fluids (e.g., individual paint components). The exact fluids filling each compartment **18** and the number of compartments will vary based on the paint mixture being used. Accordingly, there may be any number of different pre-filled cup liner **10** options with different ratios, types and numbers of fluids. In this embodiment, the cup liner **10** may include a tamper-evident seal or closure (not shown) to provide a visual indication to the painter if the reservoir, which has been pre-filled with fluid, has been accessed. In one embodiment, a single tamper-evident seal closing all the compartments **18** may be provided. In another embodiment, separate tamper-evident seals may be used for each compartment. Each tamper-evident seal may close the compartment the tamper-evident seal is associated with or otherwise be operatively connected to the component closing each compartment. For example, the tamper-evident seal may close the opening to the compartment **18** or be operatively connected to (e.g., a part of) a component, such as a lid, that closes the opening to the compartment. In either case, the tamper-evident seal is configured to be at least one of deformed and/or removed (e.g., the tamper-evident seal is broken) in order to open the compartment **18**. In other words, the compartments **18** cannot be opened (e.g., accessed) without damaging the fluid reservoir portion **12** (e.g., lower wall **22**, outer wall **24**, upper wall **32**, etc.) and/or the tamper-evident seal such that the compartments having been opened is apparent. In this way, a painter can perform a quick visual inspection of the cup liner **10** to check for any damage or signs that one or more of the compartments **18** have been accessed. Once the tamper-evident seal is broken by opening the compartment **18**, the compartment can be fluidly connected to the spray gun S, via the interface **26**, as described herein.

[0030] In another embodiment, the cup liner **10** is empty and the painter fills each compartment **18** of the cup liner with the fluids. For example, the painter can fill each compartment **18** by opening the one or more valves **34** and pouring the fluid into the fluid reservoir portion **12**, by removing a releasable interface and then replacing it, etc.

[0031] The cup liner **10**, as disclosed herein, keeps the two or more fluids separate in each compartment **18**. In addition, the cup liner **10** is able to open and close each compartment **18** via the valve **34**. By keeping the fluids separate and having a valve **34** that can open and close (e.g., seal off) each compartment **18**, the cup liner **10** is able to reduce costs, time and waste. The cost savings is a result of having no substantial fluid waste. Mixing the fluids downstream of the divided cup liner **10** and having the ability to close each compartment **18** allows the fluids contained in the fluid reservoir portion **12** to be stored and used later, as opposed to being thrown away when the painting project is completed.

[0032] Referring to FIGS. 5-10, one embodiment of a fitting for a spray gun S is generally indicated at reference numeral **50**. The fitting **50** separately connects the spray gun S to two or more fluid sources (not shown), each fluid source having a paint material (paint or coating component) or fluid (not shown) to be dispensed by the spray gun. Generally, the fitting **50** fluidly connects two or more fluid sources to the spray gun S while keeping the fluids separate. Keeping the fluids separate, prevents the initiation of the chemical reac-

tion and the hardening of the resulting fluid mixture, allowing the fluids to be stored and used after the painting by the spray gun S is completed.

[0033] The fitting **50** is configured to be coupled to two or more fluid sources. The fitting **50** provides fluid communication between the spray gun S and the two or more fluid sources such that the spray gun can draw at least a portion of each fluid from each of the two or more fluid sources to spray (e.g., dispense) a mixture of the two or more fluids. The fitting **50** includes two or more inlet interfaces **52**. Each inlet interface **52** defines an inlet **54** to the fitting **50**. Each inlet interface **52** is configured to be coupled to a respective one of the two or more fluid sources such that the fluid of each fluid source is in fluid communication with the inlet defined by the respective inlet interface. In the illustrated embodiment, the fitting **50** includes three (broadly, at least two) inlet interfaces **52**, although more or less inlet interfaces **52** are within the scope of the present disclosure. In the illustrated embodiment, each inlet interface **52** includes a generally cylindrical wall **56** that defines at least a portion of the respective inlet **54** of each inlet interface. The cylindrical wall **56** is configured to couple to the fluid source. In the illustrated embodiment, each cylindrical wall **56** includes interior threads to threadably connect to one of the fluid sources. In other embodiments, the cylindrical wall **56** may include exterior threads or protrusions and/or detents to connect to one of the fluid sources. Other ways of connecting the fitting **50** to the fluid sources are within the scope of the present disclosure. Each inlet interface **52** sealingly engages (e.g., creates a fluid tight seal with) the fluid source to prevent any fluid from moving between the inlet interface and the fluid source. The inlets **54** may all be of generally equal size (e.g., cross-sectional area) or at least two, including all, of the inlets may be of different or unequal size. Because each fluid source is connected to its own inlet interface **52**, the fluids contained in (e.g., held by, supplied by) each fluid source are kept separate until the fluids are drawn into the spray gun S. In this manner, the fluids from each fluid source are prevented from mixing until the fluids flow into the fitting **50**.

[0034] The fitting **50** also includes an outlet interface **58** configured to be coupled to the spray gun S. The outlet interface **58** is configured to provide fluid communication between the spray gun S and the two or more fluid sources when the outlet interface is coupled to the spray gun and the two or more inlet interfaces **52** are coupled to the two or more fluid sources. The outlet interface **58** defines a passageway or outlet **60**. The outlet **60** is in fluid communication with each of the two or more inlets **54**. Internal passaging (not shown) fluidly connects each inlet **54** to the outlet **60**. The outlet **60** is configured to be in fluid communication with the spray gun S when the outlet interface **58** is coupled to the spray gun. Thus, the outlet **60** provides fluid communication between the spray gun S and each inlet **54** when the outlet interface **58** is coupled to the spray gun. In one embodiment, the outlet interface **58** includes a circumferential wall **62** that defines at least a portion of the outlet **60**. In one embodiment, the circumferential wall **62** may include interior or exterior threads to threadably connect to the spray gun S. In another embodiment, the circumferential wall **62** may include protrusions and/or detents to connect the outlet interface **58** to the spray gun S (e.g., by bayonet connections). Other ways of connecting the fitting **50** to the spray gun S are within the scope of the present disclosure.

The outlet interface **58** sealingly engages (e.g., creates a fluid tight seal with) the spray gun S to prevent any fluid from moving between the outlet interface and the spray gun.

[0035] The fitting **50** is configured to selectively close (e.g., fluidly disconnect) each inlet **54** of the inlet interfaces **52** to inhibit the two or more fluids from each of the two or more fluid sources from mixing and/or from being drawn into the spray gun S. The fitting **50** is also configured to selectively open (e.g., fluidly connect) each inlet **54** of the inlet interfaces **52** to permit the spray gun S to draw or receive at least a portion of each fluid from each of the two or more fluid sources to spray a mixture of the two or more fluids. Preferably, the fitting **50** includes one or more valves **64** disposed along the passaging between the outlet **60** and the two or more inlets **54** and fluidly connects the outlet to each inlet. In other words, the one or more valves **64** are disposed between the outlet interface **58** and the two or more inlet interfaces **52**. In the illustrated embodiment, a single valve **64** is disposed between and connected to each of the inlets **52** and the outlet **60**. In other embodiments, the fitting **50** may include a dedicated valve to each inlet **54** that can be operated independently of the other valves. The one or more valves **64** have an open configuration (FIGS. 7 and 9) and a closed configuration (FIGS. 6 and 8). The one or more valves **64** close the two or more inlets **54** (e.g., fluidly disconnect each inlet from the outlet **60** and, therefore, from one another) to inhibit the two or more fluids contained in the two or more fluid sources from mixing and/or from being drawn by the spray gun S when the one or more valves are in the closed configuration. The one or more valves **64** open the two or more inlets **54** to permit the spray gun S to draw at least a portion of each fluid from each of the two or more fluid sources to spray a mixture of the two or more fluids when the valve is in the open configuration.

[0036] In the illustrated embodiment, the valve **64** selectively opens and closes the inlets **54** together. The illustrated valve **64** includes a stationary plate **66** defining at least one opening coextensive or aligned with the inlet **54**. The inlet interfaces **52** and inlets **54** are shown in phantom in FIG. 8. In the illustrated embodiment, each circumferential wall **56** extends from the stationary plate **66** from each opening. The valve **64** includes a selectively rotatable plate **68**, relative to the stationary plate **66**, configured to move between open and closed positions to open and close the valve. In the illustrated embodiment, the circumferential wall **62** extends from the rotatable plate **68** in a direction generally opposite to the circumferential walls **56**. The rotatable plate **68** defines openings **70** (broadly, two or more openings). The openings **70** are shown in phantom in FIG. 6. Each opening **70** is configured to align with one of the openings (e.g., inlets **54**) of the stationary plate **66** when the rotatable plate **68** is in the open position (e.g., the valve **64** is in the open configuration) so that the valve is open (FIGS. 7 and 9) and each opening **70** is configured to be misaligned with all of the openings (e.g., inlets **54**) of the stationary plate when the rotatable plate is in the closed position (e.g., the valve is in the closed configuration) so that the valve is closed (FIGS. 6 and 8). Rotating the rotatable plate **68** relative to the stationary plate **66** selectively opens and closes the valve **64** (e.g., moves the openings **70** into and out of alignment with the inlets **54**). The use of other types and styles of valves are within the scope of the present disclosure. In one embodiment, the inlet interfaces **52** may include a mesh screen to filter each fluid before the fluids enter the valve **64**. The one

or more valves **64** may provide a visual indication if the valve is open or closed. For example, a painter can visually observe whether or not the openings **70** and inlets **54** are aligned or indicia may be provided on the valve to indicate if the valve is open or closed.

[0037] In one embodiment, the fitting **50** may include a cup connection portion **72** configured to couple to a cup (not shown) used with a spray gun S, as described herein, in order to couple the fitting to the cup. In this manner, the fitting **50** acts as a lid for the cup. In the illustrated embodiment, the cup connection portion **72** includes a circumferential wall **74** that is configured to connect with the cup. The circumferential wall **74** includes interior threads to threadably connect to the cup. Other ways of connecting the fitting **50** to the cup are within the scope of the present disclosure. The circumferential wall **74** extends from the stationary plate **66** in the same direction as circumferential walls **56**.

[0038] Referring to FIGS. 5-10, in operation, the fluid contained in or supplied by each fluid source is drawn or fed out of each fluid source into the inlets **54**, through the valve **64** and into the outlet **60** before entering the spray gun S. The fluids mix in the outlet **60** and continue to mix as the fluids (e.g., fluid mixture, fluid combination) move through and out of the spray gun S. In one embodiment, a mixer **76** (broadly, a mixing apparatus) may be connected to and between the outlet interface **58** and the spray gun S to mix the two or more fluids before the fluids enter the spray gun (FIG. 10). The mixer **76** may be any suitable device configured to mix or agitate a flow of fluid there-through, such as by introducing or creating turbulence in the flow of fluids. For example, the mixer **76** may include one or more protrusions, guides, and/or projections that extend into the flow and/or redirect the flow of the fluids to effectuate mixing. The mixer **76** may be disposable (e.g., configured to be used once and then thrown away). Similar to the valves **34**, the one or more valves **64** and/or inlets **54** act as a proportional metering device, permitting a proportional amount of each fluid (relative to the amounts of the other fluids) to flow out of each fluid source in order to achieve the correct mixing ratio of the two or more fluids. For example, in the illustrated embodiment, the inlets **54** are generally equal in size (e.g., cross-sectional area taken relative to the direction of flow) resulting in generally equal proportions of each fluid flowing into the outlet **60** and into the spray gun S. Inlets **54** of generally unequal size would result in unequal proportions of each fluid flowing into the passageway. Accordingly, by controlling the size of the inlet **54** and/or valve **64** the fluid from each fluid source flows through, the relative proportions of each fluid dispensed by the spray gun S can be controlled. In this manner, the desired mixing ratio of the two or more fluids can be obtained. In addition, the one or more valves **64** can be partially opened (e.g., partially closed) to control the mixing ratio of the two or more fluids. For example, in an embodiment where each inlet interface **52** has a dedicated, independently operatable valve **64**, the mixing ratio of the two or more fluids can be established by selectively determining the extent each valve is opened.

[0039] In one embodiment, the two or more fluid sources are two or more bags (not shown) that are supported by the cup used with the spray gun S. In this embodiment, each bag contains one of the fluids therein and each inlet interface **52** is configured to couple to one of the two or more bags. For example, each bag may have a bag outlet having threads so that the bag outlet can threadably connect to one of the inlet

interfaces **52**. In operation, the two or more bags are connected to the fitting **50** and positioned in the cup. The fitting **50** is then secured to the cup, using the cup connection portion **72**. In this embodiment, the fitting **50** is a lid for the cup and secures the two or more bags in the interior of the cup. The outlet interface **50** is then used to connect the fitting **50** to the spray gun S. The bags may be bought pre-filled with fluid or empty and filled with fluid by the painter.

[0040] For example, each of the two or more bags can be pre-filled, by the manufacturer, with one of the two or more fluids. In this embodiment, each bag may include a tamper-evident seal or closure (not shown) to provide a visual indication to the painter if each bag, which has been pre-filled with fluid, has been accessed. The tamper-evident seal may close the bag or otherwise be operatively connected to the component closing the bag. For example, the tamper-evident seal may close the bag outlet or be operatively connected to (e.g., a part of) a component, such as a lid, that closes the bag outlet. In either case, the tamper-evident seal is configured to be at least one of deformed and/or removed (e.g., the tamper-evident seal is broken) in order to open the bag. In other words, the bags cannot be opened (e.g., accessed) without damaging the bag and/or the tamper-evident seal such that the bags cannot be reclosed and/or such that the bags having been opened is apparent. In this way, a painter can perform a quick visual inspection of each bag to check for any damage or signs that one or more of the bags have been accessed. Once the tamper-evident seal is broken by opening the bag (e.g., opening the bag outlet), the bag can be fluidly connected to the spray gun S, via the fitting **50**, as described herein.

[0041] The fitting **50**, as disclosed herein, keeps the separately contained two or more fluids from being mixed before being used in the painting process. This allows a painter to only use the amount of fluid required for a project, reducing material waste. In addition, the fitting **50** is able to open and close each inlet **54** via the valve **64**. By keeping the fluids separate and having a valve **64** that can open and close (e.g., seal off) each inlet **54**, the fitting **50** is able to reduce costs, time and waste. The cost savings is a result of having no substantial fluid waste. Any unused portion of a fluid (e.g., paint component) is retained in its separate fluid source vessel so that it can be saved for later use.

[0042] In view of the above, it will be seen that several advantageous results are obtained.

[0043] Having described the invention in detail, it will be apparent that modifications and variations are possible without departing from the scope of the invention defined in the appended claims.

[0044] When introducing elements of the present invention or the preferred embodiment(s) thereof, the articles “a”, “an”, “the” and “said” are intended to mean that there are one or more of the elements. The terms “comprising”, “including” and “having” are intended to be inclusive and mean that there may be additional elements other than the listed elements.

[0045] In view of the above, it will be seen that the several objects of the invention are achieved and other advantageous results attained. As various changes could be made in the above constructions and methods without departing from the scope of the invention, it is intended that all matter contained in the above description and shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

1. A cup liner for a cup of a spray gun, the cup supporting two or more fluids to be dispensed by the spray gun, the cup liner comprising:

a fluid reservoir portion configured to be received in an interior of the cup, the fluid reservoir portion configured to contain the two or more fluids, the fluid reservoir portion defining a reservoir configured to hold the two or more fluids, the fluid reservoir portion including a divider portion having one or more divider walls dividing the reservoir into two or more compartments, each compartment configured to contain one of the two or more fluids, the one or more divider walls separating each compartment such that each compartment is configured to separate the fluid contained therein from the fluids contained in the other compartments when the reservoir is filled with the two or more fluids, wherein the fluid reservoir portion is configured to be fluidly connected to the spray gun when the fluid reservoir portion is received in the cup such that the spray gun can draw at least a portion of each fluid from each of the two or more compartments to spray a mixture of the two or more fluids.

2. The cup liner of claim 1, wherein the fluid reservoir portion includes at least three compartments.

3. The cup liner of claim 1, further comprising a liquid paint component in each of the two or more compartments.

4. The cup liner of claim 3, further comprising a tamper-evident seal that must be broken to access the liquid paint components in each of the two or more compartments without damaging the fluid reservoir portion of the liner.

5. The cup liner of claim 4, wherein the fluid reservoir portion includes a lower wall and a cylindrical outer wall extending upward from the lower wall, the lower and outer walls defining the reservoir, and wherein the one or more divider walls are connected to the lower and outer walls.

6. The cup liner of claim 5, wherein the outer wall has a longitudinal axis and the at least one divider wall includes three divider walls, the three divider walls all connected together along the longitudinal axis, the three divider walls dividing the reservoir into three compartments.

7. The cup liner of claim 1, further comprising an interface coupled to the fluid reservoir portion, the interface configured to be coupled to the spray gun, the interface configured to selectively close each compartment of the fluid reservoir portion to inhibit the two or more fluids contained in the reservoir from mixing and from being drawn by the spray gun and the interface configured to selectively open each compartment of the fluid reservoir portion to permit the spray gun to draw at least a portion of each fluid from each of the two or more compartments to spray the mixture of the two or more fluids.

8. The cup liner of claim 7, wherein the interface is releasably coupled to the fluid reservoir portion.

9. The cup liner of claim 7, wherein the interface defines a passageway in fluid communication with each of the two or more compartments, the passageway providing fluid communication between the spray gun and each compartment of the fluid reservoir portion when the interface is coupled to the spray gun.

10. The cup liner of claim 9, wherein the interface includes a valve disposed between the passageway and the two or more compartments, the valve having an open configuration and a closed configuration, the valve closing the two or more compartments of the fluid reservoir portion

to inhibit the two or more fluids contained in the reservoir from mixing and from being drawn by the spray gun when the valve is in the closed configuration and the valve opening the two or more compartments of the fluid reservoir portion to permit the spray gun to draw at least a portion of each fluid from each of the two or more compartments to spray a mixture of the two or more fluids when the valve is in the open configuration.

11. The cup liner of claim **7**, wherein the interface sealingly engages the fluid reservoir portion to inhibit the two or more fluids contained in the reservoir from mixing.

12. The cup liner of claim **1**, in combination with at least one of the cup and the spray gun.

13. A fitting for a spray gun to connect the spray gun to two or more fluid sources, each fluid source having a fluid to be dispensed by the spray gun, the fitting comprising:

two or more inlet interfaces, each inlet interface defining an inlet to the fitting, each inlet interface configured to be coupled to a respective one of the two or more fluid sources such that the fluid of each fluid source is in fluid communication with the inlet defined by the respective inlet interface; and

an outlet interface defining an outlet in fluid communication with each inlet, the outlet interface configured to be coupled to the spray gun, wherein the outlet interface is configured to provide fluid communication between the spray gun and the two or more fluid sources when the outlet interface is coupled to the spray gun and the two or more inlet interfaces are coupled to the two or more fluid sources such that the spray gun can draw at least a portion of each fluid from each of the two or more fluid sources to spray a mixture of the two or more fluids.

14. The fitting of claim **13**, further comprising a valve disposed between the two or more inlet interfaces and the outlet interface, the valve fluidly connecting each inlet with the outlet when the valve is in the open position and closing

each inlet to inhibit the fluids from the two or more fluid sources from mixing and being drawn in the spray gun when the valve is in the closed position.

15. The fitting of claim **13**, wherein each inlet interface includes threads to threadably connect to one of the two or more fluid sources.

16. The fitting of claim **13**, further comprising a cup connection portion configured to couple the fitting to the cup.

17. The fitting of claim **16**, wherein the cup connection portion includes threads to threadably connect to the cup.

18. The fitting of claim **17**, wherein the two or more fluid sources are two or more bags that are supported by the cup, each bag containing one of the fluids therein, wherein each inlet interface is configured to couple to one of the two or more bags.

19. The fitting of claim **13**, in combination with at least one of the two or more fluid sources, the cup and the spray gun.

20. A method of spraying two or more fluids from two or more fluid sources with a spray gun, each fluid source having one of the two or more fluids, the method comprising:

accessing the two or more fluids from the two or more fluid sources, wherein accessing the two or more fluids comprises breaking a tamper-evident seal associated with each fluid source;

coupling each of the two or more fluid sources directly to a single fitting;

coupling the fitting to the spray gun, wherein the fitting provides fluid communication between each fluid source and the spray gun after each of the two or more fluid sources is coupled to the fitting and the fitting is coupled to the spray gun; and

spraying a mixture of the two or more fluids with the spray gun.

* * * * *