



US006700052B2

(12) **United States Patent**
Bell

(10) **Patent No.:** **US 6,700,052 B2**
(45) **Date of Patent:** **Mar. 2, 2004**

(54) **FLEXIBLE THERMOELECTRIC CIRCUIT**

6,347,521 B1 2/2002 Kadotani et al. 62/3.7
6,410,971 B1 * 6/2002 Otey 257/467

(75) Inventor: **Lon E. Bell**, Altadena, CA (US)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Amerigon Incorporated**, Irwindale, CA (US)

WO WO 02/13282 * 2/2002

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 83 days.

A New Concept of Porous Thermoelectric Module Using a Reciprocating Flow for Cooling/Heating System (Numerical Analysis for Heating System), Shigeru Tada, Ryozo Echigo and Hideo Yoshida, 16th International Conference on Thermoelectrics (1997).

(21) Appl. No.: **09/987,804**

International Search Report for PCT/US 02/03654 dated Jun. 12, 2002.

(22) Filed: **Nov. 5, 2001**

H. J. Goldsmid, *Electronic Refrigeration*, Pion Ltd, 207 Brondesbury Park, London (1986).

(65) **Prior Publication Data**

US 2003/0084935 A1 May 8, 2003

Stanley W. Angrist, *Direct Energy Conversion*, 32 Ed. Allyn & Bacon (1976).

(51) **Int. Cl.**⁷ **H01L 35/34**

International Search Report for PCT/US 02/06285 dated Jun. 12, 2002.

(52) **U.S. Cl.** **136/201**; 136/203; 136/205; 136/211; 136/212

(58) **Field of Search** 136/203, 205, 136/208, 211, 212; 62/3.3, 3.4

A New Concept for Improving Thermoelectric Heat Pump Efficiency, R.J. Buist, J.W. Fenton and J.S. Lee, Borg-Warner Thermoelectrics Wolf and Algonquin Road.

(56) **References Cited**

* cited by examiner

U.S. PATENT DOCUMENTS

Primary Examiner—Patrick Ryan

3,554,815 A	*	1/1971	Osborn	136/203
3,635,037 A		1/1972	Hubert	62/3
3,681,929 A		8/1972	Schering	62/3
3,779,814 A		12/1973	Miles et al.	136/236
4,065,936 A		1/1978	Fenton et al.	62/3
4,730,459 A		3/1988	Schlicklin et al.	62/3.3
5,092,129 A		3/1992	Bayes et al.	62/3.3
5,228,923 A		7/1993	Hed	136/208
5,232,516 A		8/1993	Hed	136/204
5,802,856 A		9/1998	Schaper et al.	62/3.7
6,084,172 A		7/2000	Kishi et al.	136/200
6,097,088 A	*	8/2000	Sakuragi	257/712
6,334,311 B1		1/2002	Kim et al.	62/3.2
6,346,668 B1		2/2002	McGrew	136/200


Assistant Examiner—Thomas H. Parsons



(74) *Attorney, Agent, or Firm*—Knobbe, Martens, Olson & Bear, LLP

(57) **ABSTRACT**

A flexible thermoelectric circuit is disclosed. Thermoelectric circuits have traditionally been of the rigid or substantially rigid form. Several different embodiments of thermoelectric circuits are disclosed which permit flexion in one or more directions to permit applications where flexible thermoelectric circuits are advantageous.

57 Claims, 7 Drawing Sheets

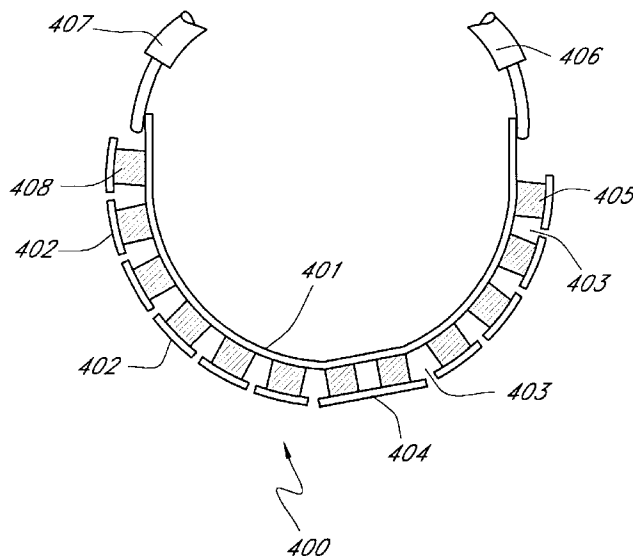

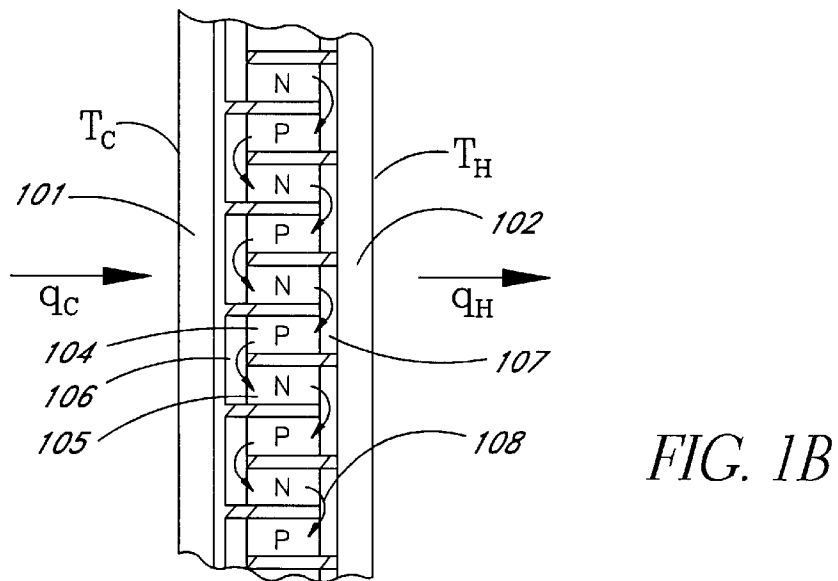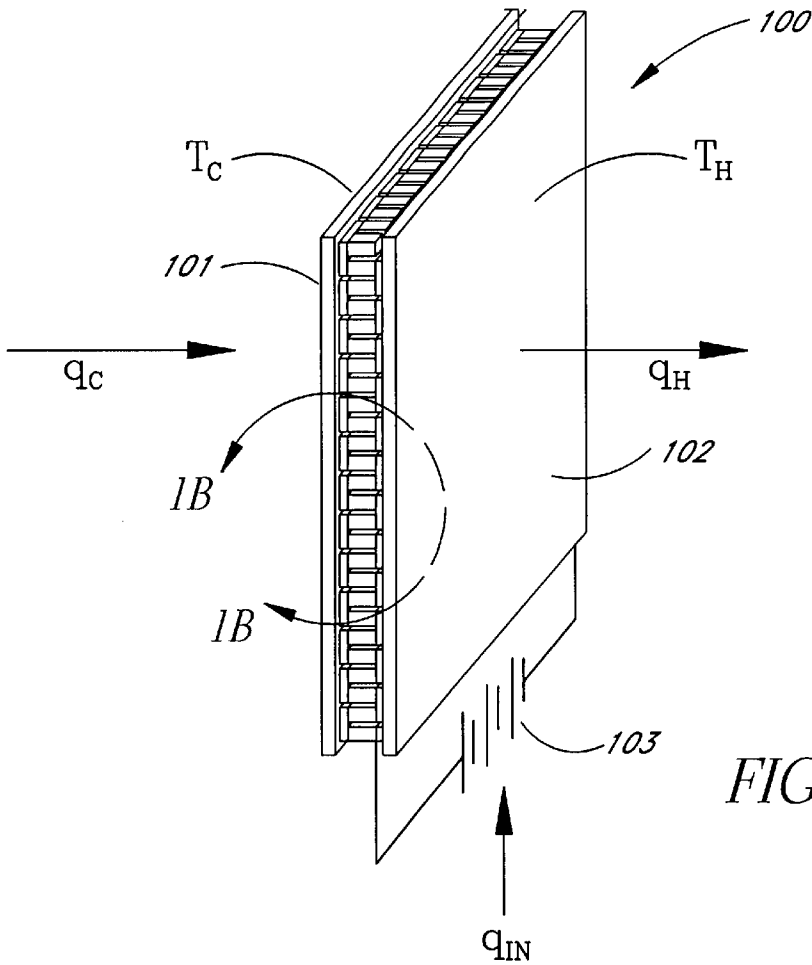

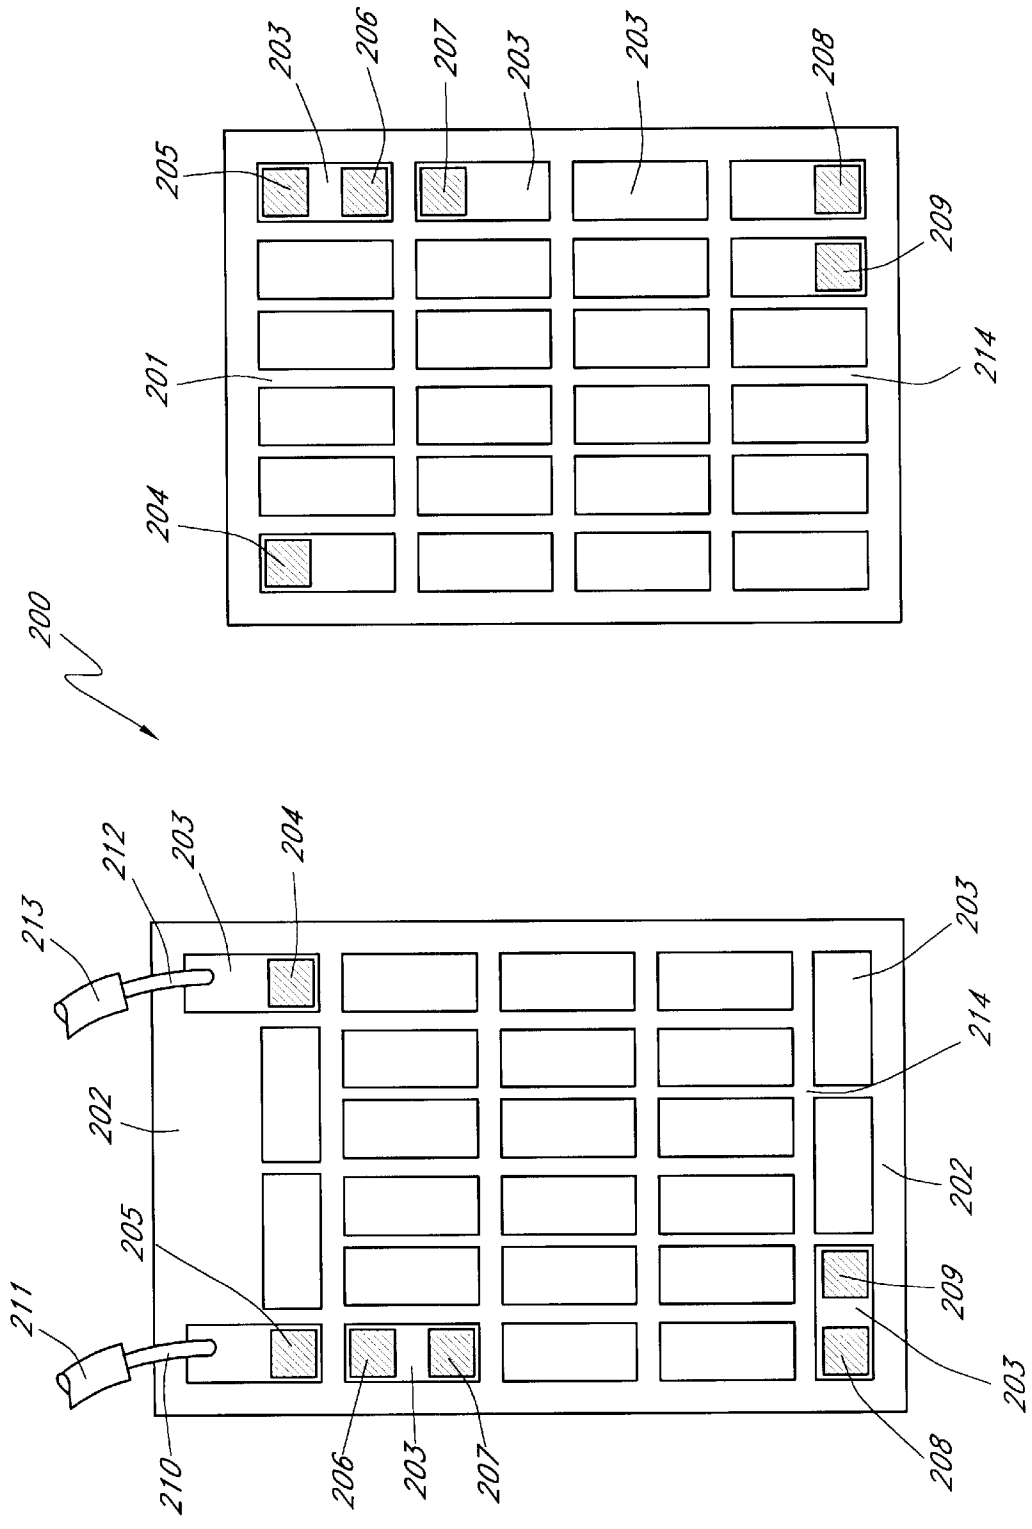


FIG. 2B

FIG. 2A

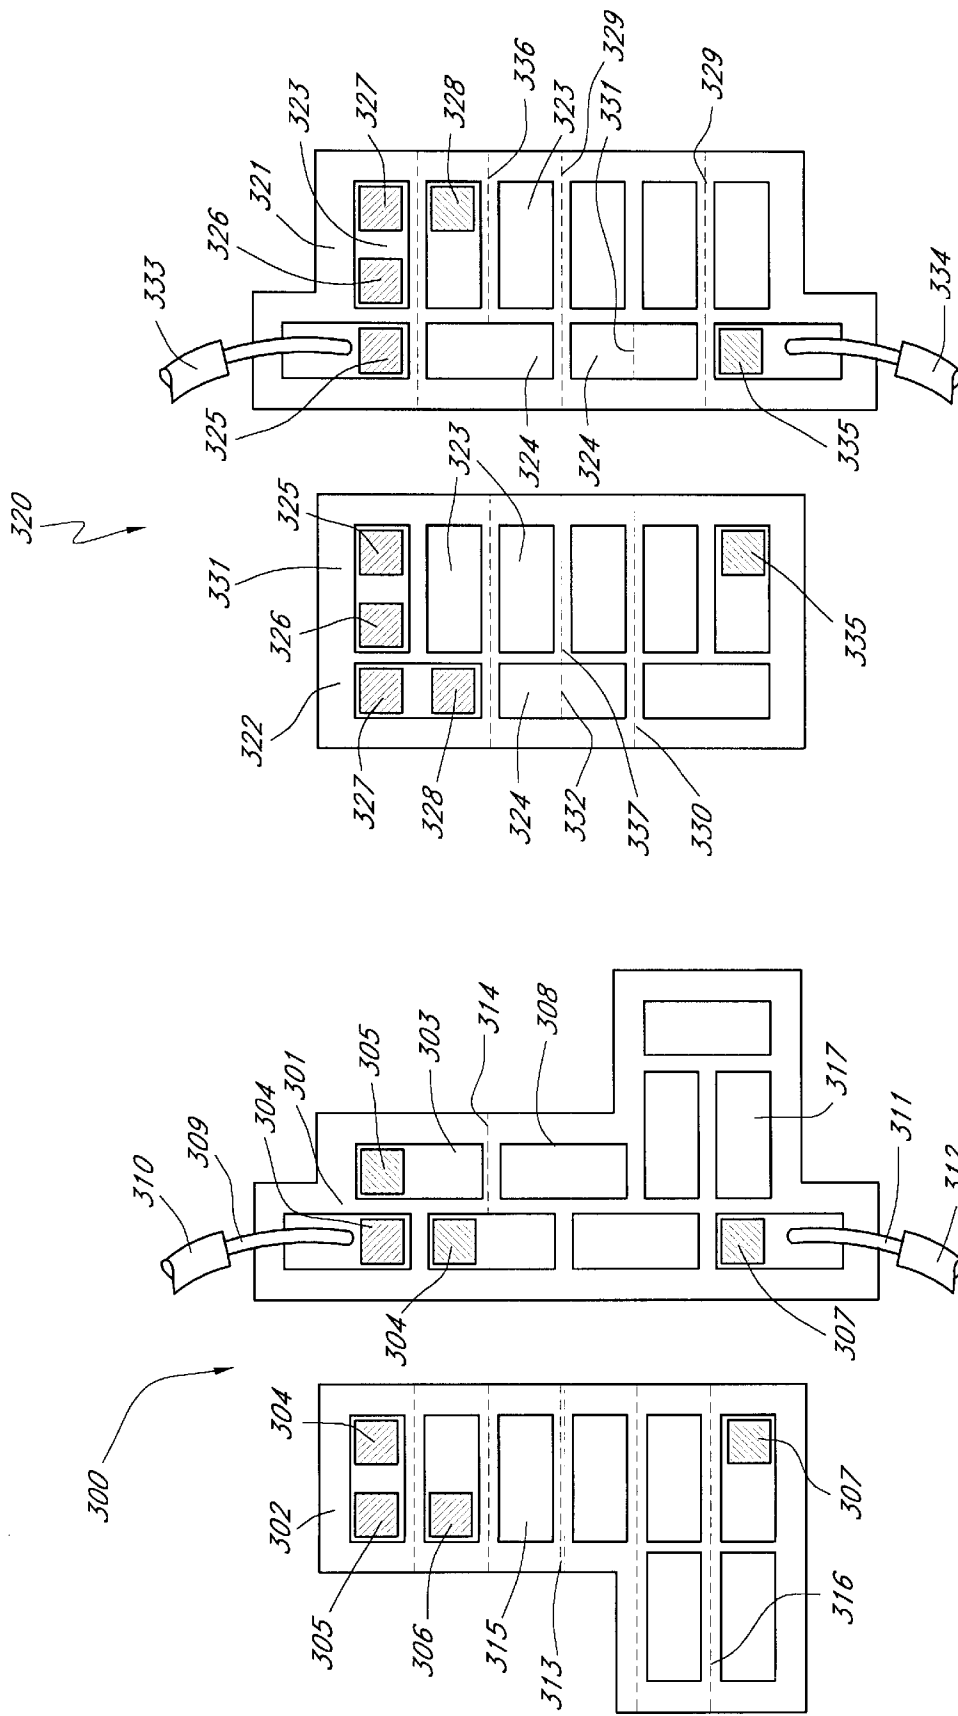


FIG. 3B

FIG. 3A

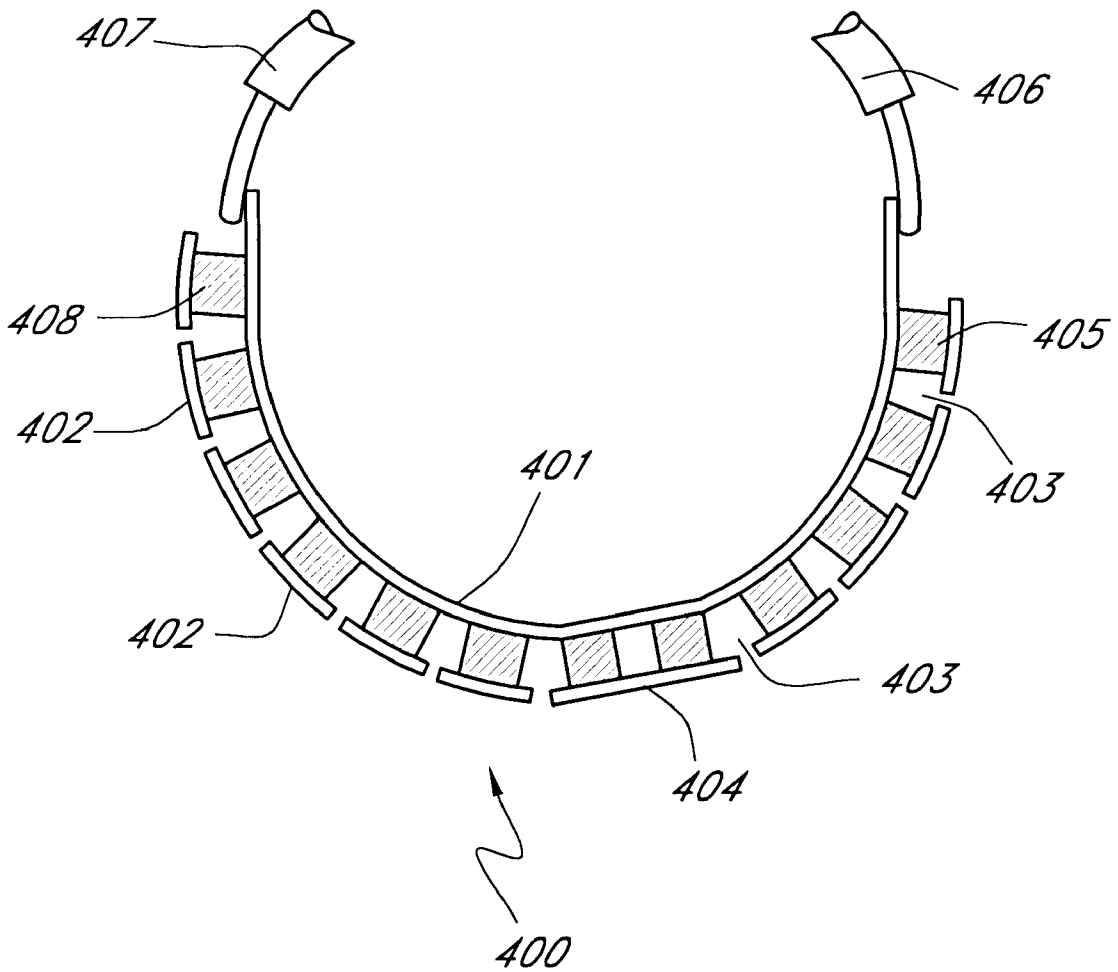


FIG. 4

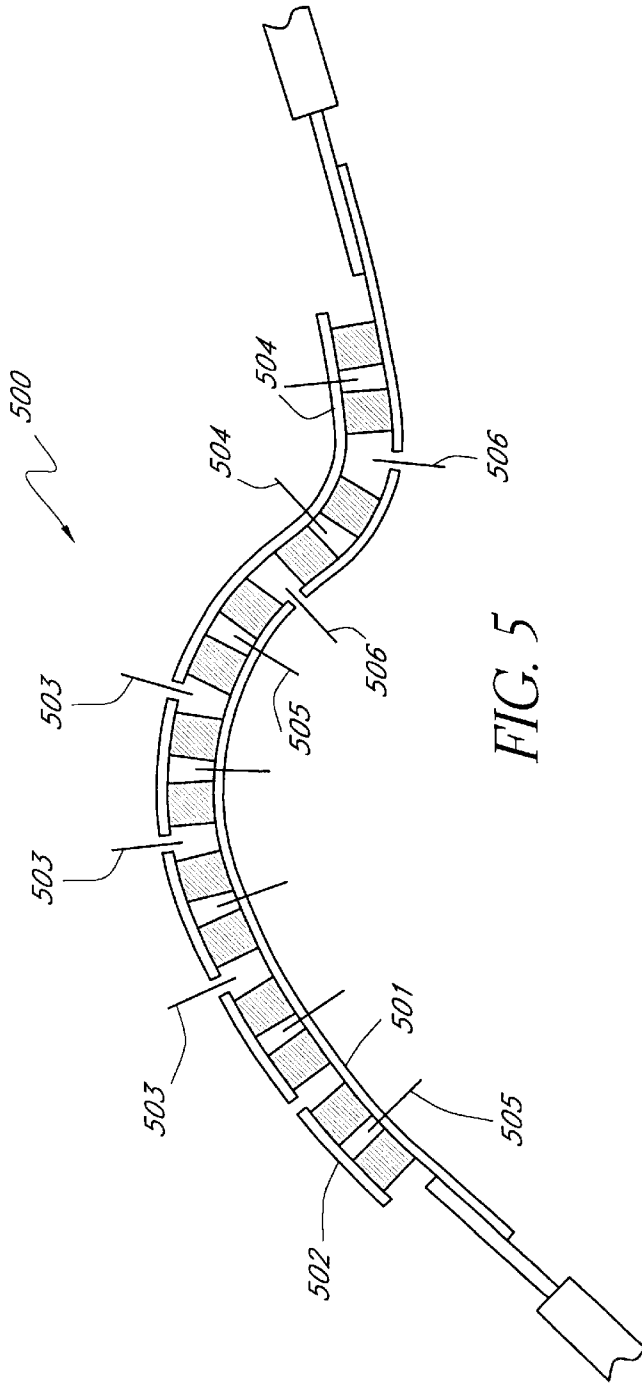


FIG. 5

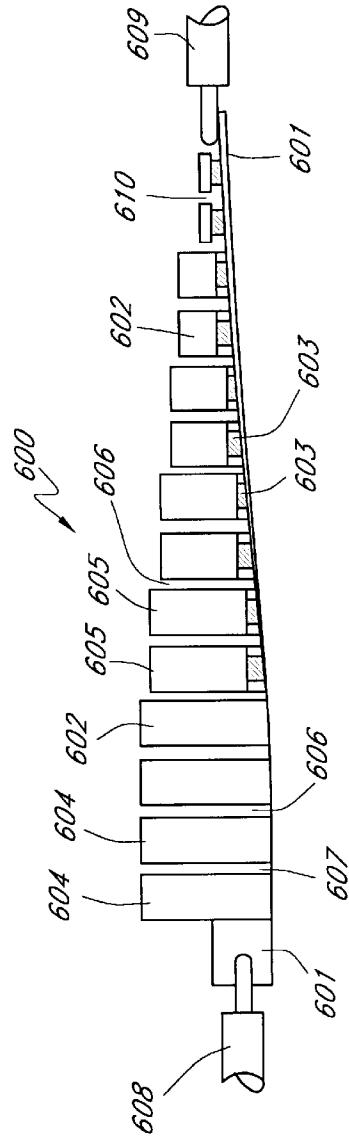


FIG. 6

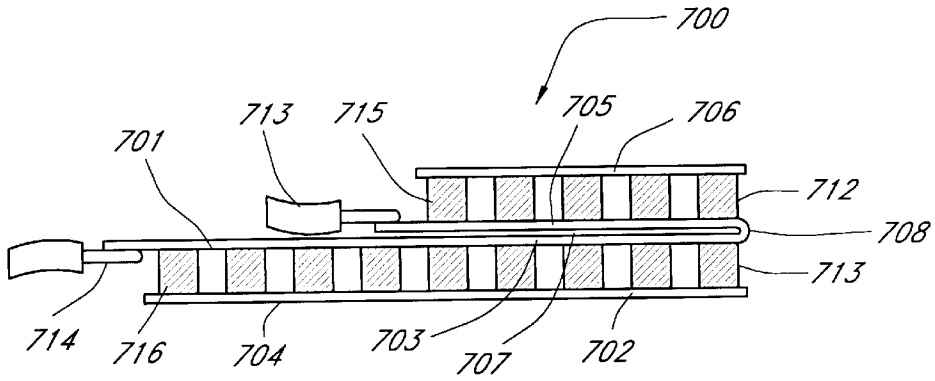


FIG. 7

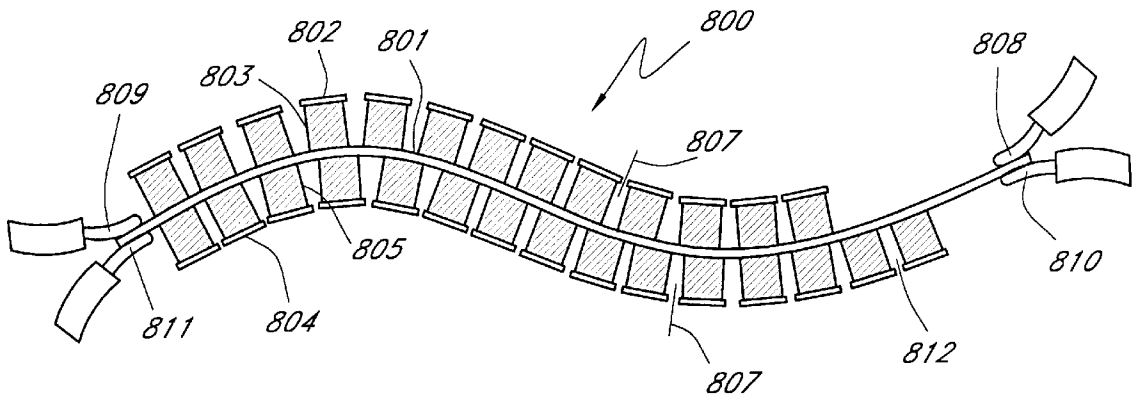


FIG. 8

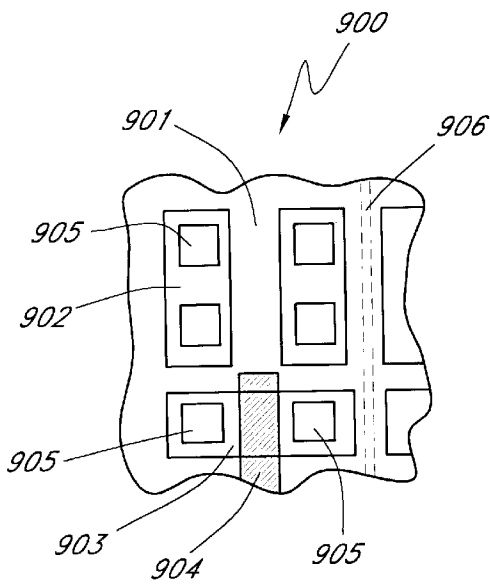


FIG. 9A

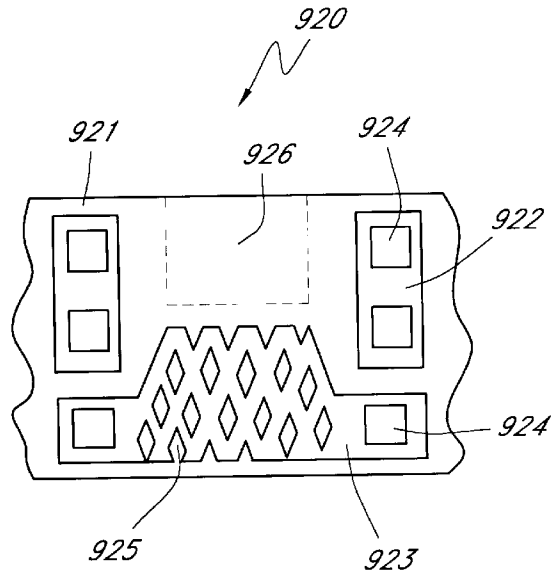


FIG. 9B

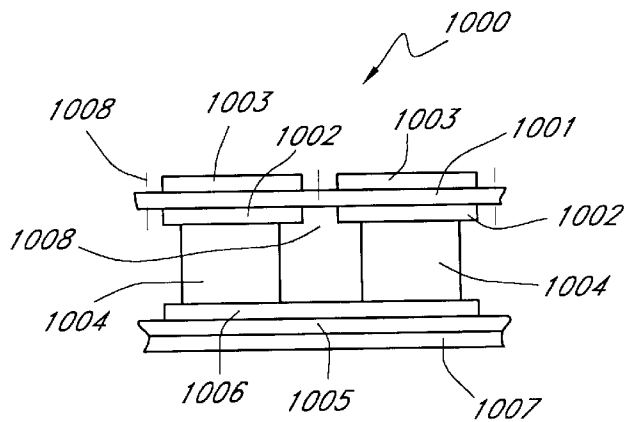


FIG. 10

FLEXIBLE THERMOELECTRIC CIRCUIT**BACKGROUND OF THE INVENTION**

1. Field of the Invention

The description below relates to flexible thermoelectric circuits.

2. Description of the Related Art

Present Thermoelectric Modules (TEMs) use substrates to form the electrical paths to connect individual Thermoelectric Elements (TEEs). Generally, the connections are made so that one surface of an array of TEEs is heated and the opposite surface is cooled when current is passed through the array in a specified direction. Most TEMs have ceramic substrates with copper circuits to connect individual TEEs. The TEEs are soldered to the copper circuits. Other systems use printed and fired conductive ink circuits, and still others use circuits fabricated within the substrate structure itself and have the circuit pattern formed into a monolithic substrate/conductor structure.

In certain TEMs, Kapton or other high temperature organic substrates are used in combination with laminated or deposited copper circuit material. Such assemblies are processed using printed circuit technology to form the circuit pattern and electrically connect the TEEs. The substrate construction produces TEMs that are essentially rigid.

In TEM designs the substrates are on opposite sides of the TEEs forming a sandwich with the TEEs between the substrates. Because of this geometry, present substrates, even those that are polymer based, do not allow the TEM to flex to the degree needed. Furthermore, when such assemblies are bent forcefully, high shear forces are produced on individual TEEs which cause immediate failure or reduced life. In applications that involve exposure to thermal cycling, variable mechanical loadings, shock or vibration, bending and shear forces can occur repeatedly so the systems tend to have short life and can thereby make the use of TEMs impractical

SUMMARY OF THE INVENTION

Certain recent applications for TEMs benefit from the use of flexible TEMs that can be shaped to meet the geometrical constraints imposed by the optimized cooling and heating system performance. By employing such flexible TE systems, costs, size and complexity can be reduced and system capability improved.

Substrates are designed and constructed so that they can flex in one or more directions; the construction of such substrates follows certain design guidelines that are described in text and figures that follow. Several variations are described that can meet specific design needs such as (1) flexure in one and more than one direction; (2) designs for TEMs that flex and have zones that heat and others that cool on the same substrate surface; (3) systems that provide thermal isolation in accordance with co-pending U.S. patent application Ser. No. 09/844,818 entitled Improved Efficiency Thermoelectrics Utilizing Thermal Isolation; and (4) systems that are cascades or multi-layered.

Several embodiments and examples of thermoelectrics are described. A first embodiment involves a flexible thermoelectric that has a plurality of thermoelectric elements and first and second substrates. The substrates sandwich the plurality of thermoelectric elements and have electrical conductors that interconnect ones of the plurality of thermoelectric elements. At least one of the first and second

substrates is constructed of a substantially rigid material, and the substrates are configured to flex in at least one direction.

For example, at least one substrate may be weakened, have cuts, be formed in sections, be shaped, be constructed of a material, or be modified in order to permit flexing. The flexible thermoelectric, in one embodiment, is for use with a fluid flow, and the sections or cuts are formed in a manner to improve thermal isolation from section to section in at least the direction of fluid flow. Other features may be provided to provide thermal isolation in the direction of fluid flow.

In one embodiment, the thermoelectric flexes in at least two directions. In another embodiment, the thermoelectric is constructed with a single layer of thermoelectric elements, and cools on a first side and heats on a second side, in response to an electrical current. Alternatively, or in addition, at least portions of the thermoelectric may have multiple layers of thermoelectric elements. In this manner, a first plurality of thermoelectric elements may be positioned along a first side of a central substrate and a second plurality of thermoelectric elements may be positioned along an opposing side of the central substrate. The first plurality of thermoelectric elements are sandwiched between the first substrate and the central substrate, and the second plurality of thermoelectric elements are sandwiched between said second substrate and the central substrate. In this embodiment, the flexible thermoelectric may be configured to provide both heating and cooling on one side of the thermoelectric, in response to a current flow.

In one embodiment, the flexible thermoelectric further has at least a first thermal conductor configured to provide heat flow to and/or from the thermoelectric. In addition, the thermal conductor strengthens the thermoelectric.

Another example of a flexible thermoelectric has a plurality of thermoelectric elements, and first and second substrates sandwiching the plurality of thermoelectric elements, wherein at least one of the first and second substrates is constructed in sections in a manner to permit flex of the thermoelectric in at least one direction.

At least one of the substrates may be weakened, formed in sections, have cuts, be of a material selected, or be shaped, to permit flexing. As with the previous embodiment, the flexible thermoelectric may be for use with a fluid flow, and the cuts may be formed in a manner to improve thermal isolation from section to section in at least the direction of fluid flow. In one advantageous embodiment, the flexible thermoelectric flexes in at least two directions.

Again, the flexible thermoelectric may also be constructed with a single layer of thermoelectric elements, or multiple layers of thermoelectric elements. The flexible thermoelectric may be configured to cool on a first side and heat on a second side, or to both cool and heat on the same side. For example, a first plurality of thermoelectric elements may be positioned along a first side of a central substrate and a second plurality of thermoelectric elements may be positioned along an opposing side of the central substrate, where the first plurality of thermoelectric elements are sandwiched between the first substrate and the central substrate, and the second plurality of thermoelectric elements are sandwiched between said second substrate and the central substrate. A thermal conductor may be provided for heat flow to and/or from the thermoelectric. In addition, a thermal conductor may be used to strengthen the thermoelectric.

In another embodiment, a flexible thermoelectric has a plurality of thermoelectric elements, and first and second

substrates sandwiching the plurality of thermoelectric elements. In this embodiment, preferably, at least one of the first and second substrates is constructed in a non-uniform manner to permit flex of the thermoelectric in at least one direction. For example, at least one substrate is weakened in places, is formed in sections, has cuts in a plurality of locations, is shaped non-uniformly, or is formed of a material in certain locations in order to permit flexing. Where the thermoelectric is for use with a fluid flow, the cuts or sections or non-uniformities are preferably formed in a manner to improve thermal isolation in at least the direction of fluid flow. In one embodiment, the thermoelectric flexes in at least two directions.

The thermoelectric may be constructed with a single layer of thermoelectric elements, or with multiple layers of thermoelectrics. In this manner, the thermoelectric may be configured to cool on a first side and heat on a second side, and/or provide both heating and cooling on the same side. For example, a first plurality of thermoelectric elements may be positioned along a first side of a central substrate and a second plurality of thermoelectric elements may be positioned along an opposing side of the central substrate, the first plurality of thermoelectric elements sandwiched between the first substrate and the central substrate, and the second plurality of thermoelectric elements sandwiched between said second substrate and the central substrate.

A method of constructing a flexible thermoelectric is also disclosed, involving the steps of providing a plurality of thermoelectric elements, and positioning or forming the thermoelectric elements between first and second substrates, wherein at least one of the substrates is constructed of a substantially rigid material, and configured to permit flexing of the thermoelectric.

In accordance with the method, the substrates may be formed in sections, may be weakened in locations, may have cuts, may be shaped, and/or may be formed of material selected to permit flexing in one or more directions. Where the resulting thermoelectric is for use with a fluid flow, the method involves making the thermoelectric in a manner to improve thermal isolation in at least the direction of fluid flow.

The method may involve forming a single layer of thermoelectric elements, or multiple layers of thermoelectric elements. In this manner, the thermoelectric may be configured to provide heating on one side and cooling on another, and/or both heating and cooling on the same side.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a conventional TEM with a ceramic substrate.

FIG. 2 depicts a typical circuit pattern for a conventional TEM.

FIG. 3 depicts a substrate for flexible TEMs.

FIG. 4 depicts a TEM flexible in one direction.

FIG. 5 depicts a TEM flexible in two directions.

FIG. 6 depicts a TEM flexible in multiple directions.

FIG. 7 depicts a flexible TEM with heating and cooling in separate zones of the same substrate.

FIG. 8 depicts a multi-layer flexible substrate.

FIG. 9 depicts representative patterns for flexible conductors in a flexible TEM.

FIG. 10 depicts a TEM with enhanced heat transfer produced by secondary thermally conductive members.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1A depicts a conventional TEM **100** with substantially rigid first and second substrates **101**, **102**. Power

supply **103** provides current to the TEM **100**. FIG. 1B depicts details of the TEM's **100** internal circuitry. P-type **104** and N-type **105** TEEs alternate and are electrically connected in series through circuits **106** and **107**. The circuits **106** and **107** are attached to the substrates **101** and **102**, respectively.

When the TEM **100** is connected to the power supply **103**, the electrons flow in the direction indicated by arrows **108**. All of the electrons flow from P-type TEEs **104** to a circuit **106** to N-type TEEs **105** on the first substrate **101** side. On the second substrate **102** side, exactly the opposite occurs. Electrons always flow from the N-type TEEs **105** through circuits **107** to P-type TEEs **104**. Under these circumstances, the flow of heat is shown by the arrows, with q_c indicating cooling at substrate **101** and q_h indicating heating at substrate **102**. The power in is denoted by q_{in} . T_c indicates the temperature of the first substrate **101**, and T_h indicates the temperature of the second substrate **102**.

FIG. 2 depicts in more detail a typical circuit pattern for the principal components of the TEM of FIG. 1. A first upper substrate **201** consists of a series of electrically conductive circuits **203** to which are soldered or otherwise uniformly and electrically connected TEEs **204**, **205**, **206**, **207**, **208** and **209**. In this configuration, every circuit **203** has two TEEs, one N-type and one P-type, attached. A corresponding second or lower substrate **202** has electrically conductive circuits **203** attached. The lower substrate **202** also has two electrical wires **210** and **212** electrically attached to two of the circuits **203**, the wires **210** and **212** are shown sheathed in insulation **211** and **213**, respectively.

When assembled, the upper substrate **201** is positioned with respect to the lower substrate **202** so that the two ends of the TEE **204** engage circuits **203**. Similarly, TEEs **205**, **206**, **207**, **208** and **209** ends are engaged as shown. Current enters through the wire **210** and passes upward from the lower substrate **202** to the upper substrate **203** through the TEE **205**. It then passes along the circuit **203** to the TEE **206**, and so on, as was illustrated in FIG. 1. This pattern continues through TEE **208** where the circuit **203** connects to TEE **209** on the lower substrate **202**. The current passes through **209** to the upper substrate **201**, and along the second set of circuits **203** which are interconnected through TEEs (not shown). The current continues to pass through circuits **203** and TEEs until it reaches TEE **204** and circuit **203**. From there the current exits the TEM through wire **212**.

Current is directed along the desired paths by electrically isolating the separate circuits **203** by electrically insulative areas **214**.

Generally, it is desirable that the upper and lower substrates **201** and **202** are constructed of electrical nonconductive materials such as alumina ceramic or the like. Preferably, the substrate materials have as high a thermal conductivity as possible perpendicular to the plane of FIG. 2 so that heat can be transported through the substrates to the outer faces of the assembled TEM with as little temperature change as possible. The circuit material and the circuit **203** design should maximize electrical conductivity between adjacent TEEs. This combination of design and material properties held minimize thermal and electrical losses in the TEM.

FIG. 3A depicts an example of a substrate system **300** wherein at least one of the substrates is constructed of a substantially rigid material in one preferred embodiment. The upper substrate **301** is made from a high thermal conductivity flexible material preferably such as Kapton polyamide film, very thin fiberglass, or any other flexible

material. Circuits **303** are on the upper substrate in a pattern. Similarly, a lower substrate **302**, which is preferably, but not necessarily, of a substantially rigid material, has circuits **315** arranged in a pattern on it. TEEs **304**, **305**, **306** and **307** are some of the TEEs in the TEM. Wires **309** and **311** each attach to a circuit. Insulation **310** and **312** sheathe the wire.

The upper circuit **301** is connected to the lower circuit **302** so that the respective ends of the TEEs **304**, **305**, **306** and **307** mate at the positions indicated in FIG. 3A. The TEEs are of N-type and P-type and are arrayed with the circuits **303** and **315** so that current flows alternately through each type of material. The pattern is such that current flows from one wire **309** through the TEM **300** to the other wire **311**, as was described in detail in FIG. 2.

Preferably, after assembly of the TEM, slots are cut into the lower substrate at positions **313** so as to separate the lower substrate **302** into segments. The upper substrate **301** can flex in the areas **308** if the circuits **303** can flex so as to not degrade the TEE circuit **303** electrical connection. By separating the substrate **302** at several locations, the TEM can be flexed in a concave direction with respect to the outer surface of the TEM upper substrate **301**. Furthermore, if a cut **314** is made in the upper substrate **301** at several locations, and the cuts **316** are made in the lower substrate **302**, the TEM can be twisted about its length as well as bent. In addition, if slots are made in the lower substrate **302** so as to remove material as shown at **313**, the TEM can flex in both directions.

The general description of FIG. 3A holds for an even number of TEEs in a horizontal row. For larger number of TEEs, there will be one circuit **315** for every two TEEs added in each row of the lower substrate **302**. One circuit **317** is added for each circuit **315** added.

FIG. 3B depicts a configuration **320** with an odd number of TEEs (for example, **325**, **326** and **327**) in each horizontal row. For the geometry, both the upper substrate **321** and the lower substrate **322** have both horizontal and vertical circuits **323** and **324**. As in FIG. 2, the assembly consists of N and P-type TEEs, and circuits arranged as described therein. Wire assemblies **333** and **334** are attached at the ends. Cuts **329** and **330** are made respectively in the upper substrate **321** and the lower substrate **322** at the locations shown.

When the TEM is assembled, for example, current enters through wire assembly **333** and into TEE **325** and so on until it exits at the wire assembly **324**, after passing through the TEE **335**. Again, the TEEs are alternately P and N-types so that as current passes, one side is heated and the other cooled. The cuts **329** and **330** allow the assembled TEM to flex in two directions if the circuits **323** and **324** can flex or bend at **331** and **332**. If the cuts **329** and **330** are formed as slots with the removal of substrate material, the corresponding flexure points can bend in both directions. Finally, if cuts **336** and **337** are incorporated, the assembled TEM can twist about its length.

In FIGS. 3A and 3B TEMs **300** and **320** form separate arrays. As a part of the present invention, part of a TEM can be of one type and other parts of the other type.

FIG. 4 depicts a TEM **400** with an upper substrate **401** and cut lower substrate **402**. Again, in this embodiment, the lower substrate material is substantially rigid, but is modified or configured in a manner to be flexible. In this configuration, dividing the substrate into sections permits the flexibility. Wire assemblies **406** and **407** are attached at each end. In accordance with the geometry of FIG. 3A, each row has an even number of TEEs **405** and **408**. The TEEs are connected via circuits (not shown) as in FIG. 3A. The

circuits, in practice, generally are very thin, such as printed circuit traces. Therefore, the circuits are often not shown in the Figures herein, except to illustrate the manner in which the circuits connect the individual TEEs.

The TEM has been bent in the principal direction indicated in the description of FIG. 3A. Spaces **403** develop because of the flexure. For descriptive purposes, the lower substrate **402** has not been cut at location **404** and therefore, that segment does not have a bend to it.

FIG. 5 depicts a TEM **500** formed according to FIG. 3B. It consists of a lower substrate **501**, preferably but not necessarily constructed from substantially rigid material with cuts **505** and **506** to permit flexing and an upper substrate **502** with cuts **503** and **504**. TEEs and electrical paths are connected as discussed in FIGS. 2 and 3B.

The TEM **500** is shown flexed in two directions. The cuts **503** are spread open and form gaps in the upper substrate **502** where TEM **500** is flexed in one direction while other cuts **504** are not open where TEM **500** is flexed in the opposite direction. Similarly, in lower substrate **501**, cuts **505** are closed while cuts **506** are open.

As noted in the discussion of FIGS. 3A and 3B, where material is removed (as an example, regions at slots **504** and **505**) such locations contribute to flexure since the substrates **501** and **502** are able to flex at those locations as well.

FIG. 6 depicts a TEM **600** of the type described in FIG. 3A. Wire assemblies **608** and **609** are attached to the lower substrate **601**. Upper substrate **602** and TEEs **603** are connected with circuits (not shown) as discussed in FIG. 3A. Slots **606** are in the upper substrate **602**. Opposite the slots **606** are partial cuts not visible in FIG. 6, but of the type shown as slot **314** of the upper substrate **301** in FIG. 3A.

The TEM **600** is depicted as twisted about its length so that the upper substrate **602** is vertical at location **607** and horizontal at the opposite end **610**. The two adjacent circuits at **604** and the two adjacent circuits at **605** act as rigid units since there is no twist in the TEM **600** at these points. Twisting occurs at slots **606** in the upper substrate **602** and the partial slots (not shown) at the corresponding location in lower substrate **601**. TEEs **603** are connected via a circuit (not shown) that is adjacent to a partial slot in the lower substrate **601**. Current can pass through the TEM **600** via wire assemblies **608** and **609**.

FIG. 7 depicts a TEM **700** with the upper substrate **701**, **703** and **705** and a lower substrate **702**, **704** and **706**, circuits (not shown), and TEEs **712**, **713**, **715** and **716**. The upper substrate **701** is folded upon itself at fold **708**. Grease **707**, solder or other high thermal conductivity material fills the space between the two segments of the upper substrate **703** and **705**. A circuit as described in FIG. 2 (not shown), connects TEE **712** to TEE **713**. The circuit pattern is either that of FIG. 3A or 3B. At the fold **708**, the TEEs **712** and **713** are both of the same type. All other TEEs are alternately N-type and P-type and are connected as described in FIG. 2.

As an example, during operation, current enters at wire assembly **713** and passes through an N-type TEE **715** and on through the first of the TEM **700** and exits through TEE **716** at wire assembly **714**. With this as an example, the lower substrate surface **706** is cooled and the upper substrate surface **705** is heated. The heat generated is conducted to the upper substrate surface **703** by the grease **707**. Since the two connecting TEEs **712** and **713** are of the same type and all others are electrically connected in series and of alternating type, the upper substrate surfaces **701** and **703** are cooled and the lower substrate surfaces **702** and **704** are heated. The upper substrate surface **703** removes the heat generated at

the upper substrate surface **705** and cools that surface, so that the lower substrate surface **706** is significantly colder than the portion of the upper substrate surface **701**, not contact with substrate surface **705**. Thus, a typical TEM cascade is formed in the region of the contact zone **707**, and a single stage TEM is formed elsewhere. With this geometry, design of the TEEs in the regions between substrate surfaces **705** and **706** and also between **702** and **703**, can be of a form well known to the art.

It is clear that other levels could be added to the cascade region of TEM **700**, and that multiple separate cascades could be fabricated by one or more flexible TEMs employing the above concepts and simple extensions thereof.

FIG. **8** depicts another variation of a TEM **800**. Herein, a backbone substrate **801** has circuits on each side preferably of the type of upper substrate **301** of FIG. **3A**. The TEM **800** has two additional substrates, an upper substrate **802** and a lower substrate **804**. Each has slots **807** formed by removing substrate material. Between the upper substrate **802** and the backbone substrate **801** are TEEs **803** and between the backbone substrate **801** and the lower substrate **804** are TEEs **805**. The TEEs **803** and **805** are alternately N-type and P-type and are connected by circuits, as in FIG. **3A** (not shown). In this example, the components are electrically connected so that the portion above the insulation layer in the backbone substrate **301** forms one TEM circuit with wire connections **808** and **809** and the portion below forms a separate TEM circuit with wire connections **810** and **811**.

The TEM **800** operates by passing current from, for example, **808** to **809** and a separate current from **810** to **811**. In this example, the current flows so that the upper substrate **802** is cooled and hence the upper surface of the backbone substrate **801** is heated. Heat passes through to the lower surface of the backbone substrate **801**, which is the cooled side of the lower portion. The lower substrate **804** is therefore heated. Thus, in this example, the TEM **800** is a cascade system. Alternately, the backbone substrate **801** could be wider, thermal energy transferred through the added width, and the currents could flow so that the backbone substrate **801** was heated or cooled by both the upper and lower TEMs.

Currents, TEE materials, number of TEEs and TEE dimensions can differ anywhere within the TEM **800** to achieve specific design and performance objectives. Also, the upper substrate **802** and the lower substrate **804** need not be the same dimensions or exact shape, thus, for example, a portion **812** of the lower substrate **804** need not have a corresponding part of the upper substrate **802**, directly in thermal contact with it. As additional examples, the upper substrate **802** could be of the type shown in FIG. **3B** and the lower substrate **804** of the type shown in FIG. **3A**. Or, the upper substrate **302** could have fewer TEEs in each row compared to the lower substrate **804** and the total number of TEEs could differ among rows. Also, the electrical connections could be modified to pass current from the upper circuits of TEM **800** to the lower circuits so that two of the wires, for example, **809** and **811**, would be eliminated. Other connection changes could be made to modify performance at certain locations, or to achieve other purposes.

The flexible TEMs described herein will often have improved thermal isolation as explained in co-pending U.S. patent application Ser. No. 09/844,818 entitled Improved Efficiency Thermoelectrics Utilizing Thermal Isolation, filed Apr. 27, 2001. As explained in that application, when the thermoelectric is utilized for heating or cooling of a flowing fluid, thermal isolation in the direction of flow improves the

efficiency of the thermoelectric. Therefore, as an example, the cuts in FIGS. **4**, **5** and **8**, or sections of substrates may be made to correspond, where practical, to provide improved thermal isolation between sections separated by the cuts, in order to improve overall efficiency of the flexible thermoelectric.

FIG. **9** depicts a portion of a substrate **900** that consists of flexible substrate material **901**, circuits **902** and **903**, solder mask **904**, TEEs **905** and slot **906**. In this design, the assembly incorporates substrate **900** to mechanically connect parts.

The circuit **902** is of the form previously discussed in FIGS. **3A** and **3B**. Circuit **903** depicts a method for allowing that circuit to flex in the region between TEEs **905**. In this configuration, solder mask **904** covers a portion of the circuit **903** so as to prevent solder from accumulating where it is so covered. If the substrate **901** is flexed, bending will occur preferentially in the solder mask **904** region, since the circuit **903** does not have solder build up there and hence, is thinnest and most easily flexed there. Such preferential bending reduces mechanical stress at the interface of the TEE **905** and circuit **903**.

FIG. **9B** depicts another geometry **920** which achieves flexure. Flexible substrate material **921** has circuits **922** and **923** attached, TEEs **924** and an elongated slot **926**. Sections **925** of the circuit **923** have been omitted.

The geometry **920** is known to the flexible circuit industry as a design that allows severe or repeated flexure with good stability. Further, by proper design, known to the art, solder accumulation in the flexure can be either prevented or reduced to acceptable levels and shear stresses induced during flexure (at the circuit **923** and substrate **921** interface) can be reduced.

Other designs for electrically conductive flexures, such as circuits that incorporate components not attached to the substrate (e.g., shunt wires and strips, electrically conductive hinges, and the like) can be employed to allow needed movement and are the subject of this invention.

FIG. **10** depicts a portion **1000** of a TEM of the present invention. It consists of an upper substrate **1001** with circuits **1002** and upper thermal conductors **1003** attached. A lower substrate **1005** has circuit **1006** and thermal conductor **1007** attached. TEEs **1004** are electrically connected to the circuits. Slots or cuts **1008** are in the upper substrate **1001** to allow flexure.

The thermal conductors **1003** and **1007** are designed to increase and distribute heat flow to and from the TEM. The conductors **1003** and **1007** are useful in high-power TEMs since typical substrate materials have relatively low thermal conductivity, and thereby reduce TEM performance. Performance can be improved by utilizing thermal conductors to increase thermal energy transport across the substrate and also mechanically strengthen the TEM. These improvements can be done by (1) maximizing the surface area of the circuit substrate and thermal conductor interface, (2) minimizing thermal resistance across the interfaces by selecting materials or material composites that minimize interfacial thermal resistance, or (3) utilizing the thermal conductors as structural members so that the substrate can be thinner, weaker or otherwise allow selection from a broader class of electrical insulators. These provide examples of designs that achieve enhanced performance, cost reduction, improved durability, size reduction and other benefits by utilizing additional componentry with the substrate. The above are presented as examples, and they do not cover all variations or otherwise restrict the scope of the invention.

In the discussion of FIGS. 3 through 10, it was stated that the substrate could have cuts, slots and sections removed to achieve flexure and bending. The same effect can be achieved by utilizing substrates that are mechanically weak. For example, the substrate could be made of a soft or weak material such as Teflon TFE, a silicone rubber, or the like; it could be made very thin; it could be mechanically weakened by incorporating holes, porosity, and making it from felt or the like; could be chemically weakened, treated to have its flexibility increased in selected areas, etched or the like; it could be fabricated with areas weakened, omitted, treated or otherwise modified, made thinner, slotted or the like that frees adjacent TEEs to move toward or away from one another so as to allow flexure and/or twisting within the TEM. The substrate could be completely omitted from the TEM so that unconstrained circuits would connect TEEs. Upon installation (and after flexure), the circuits could be attached to a structural material wherein the bonding agent or the structural material serves the function of a substrate within the system.

Although several examples and embodiments of flexible thermoelectric modules have been described above in various configurations, any flexible thermoelectric module and any variations of those embodiments described above are contemplated. Accordingly, the scope of the present invention is defined by the claims and not by any particular example. The examples above are meant to be illustrative and not in any way restrictive. In addition, the language of the claims is intended in its ordinary and accustomed meaning, without reference or special definition to any of the terms or limitation to the embodiments of those terms in the specification.

What is claimed is:

1. A flexible thermoelectric comprising: a plurality of thermoelectric elements; and first and second substrates, the substrates sandwiching the plurality of thermoelectric elements and having electrical conductors that interconnect ones of the plurality of thermoelectric elements, wherein at least one of the first and second substrates is constructed of a substantially rigid material, said substrates configured to flex in at least one direction.
2. The flexible thermoelectric of claim 1, wherein the at least one substrate constructed of the substantially rigid material is weakened in order to permit flexing of the thermoelectric.
3. The flexible thermoelectric of claim 1, wherein the at least one substrate constructed of the substantially rigid material has cuts in a plurality of locations in order to permit flexing of the thermoelectric.
4. The flexible thermoelectric of claim 3, wherein the thermoelectric is for use with a fluid flow, the cuts being formed in a manner to improve thermal isolation from section to section defined by the cuts in at least the direction of fluid flow.
5. The flexible thermoelectric of claim 1, wherein the at least one substrate constructed of the substantially rigid material is formed in sections in order to permit flexing of the thermoelectric.
6. The flexible thermoelectric of claim 5, wherein the thermoelectric is for use with a fluid flow, the sections configured to improve thermal isolation from section to section in at least the direction of fluid flow.
7. The flexible thermoelectric of claim 1, wherein the at least one substrate constructed of the substantially rigid material is shaped in a manner to permit flexing of the thermoelectric.

8. The flexible thermoelectric of claim 1, wherein at least portion of at least one of the first and second substrates is constructed of a material selected to permit flexing of the thermoelectric.

9. The flexible thermoelectric of claim 1, wherein thermoelectric flexes in at least two directions.

10. The flexible thermoelectric of claim 1, wherein the thermoelectric is constructed with a single layer of thermoelectric elements.

11. The flexible thermoelectric of claim 10, wherein the thermoelectric cools on a first side and heats on a second side, in response to an electrical current.

12. The flexible thermoelectric of claim 1, wherein at least a portion of the thermoelectric has multiple layers of thermoelectric elements.

13. The flexible thermoelectric of claim 12, wherein a first plurality of thermoelectric elements are positioned along a first side of a central substrate and a second plurality of thermoelectric elements are positioned along an opposing side of the central substrate, the first plurality of thermoelectric elements sandwiched between the first substrate and the central substrate, and the second plurality of thermoelectric elements sandwiched between said second substrate and the central substrate.

14. The flexible thermoelectric of claim 12, wherein the thermoelectric provides both heating and cooling on one side of the thermoelectric, in response to a current flow.

15. The flexible thermoelectric of claim 1, further comprising at least a first thermal conductor configured to provide heat flow to and/or from the thermoelectric.

16. The flexible thermoelectric of claim 1, further comprising at least a first thermal conductor that strengthens the thermoelectric.

17. A flexible thermoelectric comprising: a plurality of thermoelectric elements; and first and second substrates sandwiching the plurality of thermoelectric elements, wherein at least one of the first and second substrates comprises a substantially rigid material and is constructed in sections in a manner to permit flexing of the thermoelectric in at least one direction.

18. The flexible thermoelectric of claim 17, wherein at least one substrate is weakened in order to permit flexing.

19. The flexible thermoelectric of claim 18, wherein the at least one substrate constructed in sections has cuts in a plurality of locations to form said sections.

20. The flexible thermoelectric of claim 19, wherein the thermoelectric is for use with a fluid flow, the cuts being formed in a manner to improve thermal isolation from section to section in at least the direction of fluid flow.

21. The flexible thermoelectric of claim 18, wherein at least one substrate is shaped in a manner to permit flexing.

22. The flexible thermoelectric of claim 18, wherein at least a portion of at least one of the first and second substrates is constructed of a material selected to permit flexing of the thermoelectric.

23. The flexible thermoelectric of claim 18, wherein thermoelectric flexes in at least two directions.

24. The flexible thermoelectric of claim 18, wherein the thermoelectric is constructed with a single layer of thermoelectric elements.

25. The flexible thermoelectric of claim 24, wherein the thermoelectric cools on a first side and heats on a second side, in response to an electrical current.

26. The flexible thermoelectric of claim 18, wherein at least a portion of the thermoelectric has multiple layers of thermoelectric elements.

27. The flexible thermoelectric of claim 26, wherein a first plurality of thermoelectric elements are positioned along a first side of a central substrate and a second plurality of thermoelectric elements are positioned along an opposing side of the central substrate, the first plurality of thermoelectric elements sandwiched between the first substrate and the central substrate, and the second plurality of thermoelectric elements sandwiched between said second substrate and the central substrate.

28. The flexible thermoelectric of claim 27, wherein the thermoelectric provides both heating and cooling on one side of the thermoelectric, in response to a current flow.

29. The flexible thermoelectric of claim 18, further comprising at least a first thermal conductor configured to provide heat flow to and/or from the thermoelectric.

30. The flexible thermoelectric of claim 18, further comprising at least a first thermal conductor that strengthens the thermoelectric.

31. A flexible thermoelectric comprising:
a plurality of thermoelectric elements; and
first and second substrates sandwiching the plurality of thermoelectric elements, wherein at least one of the first and second substrates comprises a substantially rigid material and is constructed in a non-uniform manner to permit flexing of the thermoelectric in at least one direction.

32. The flexible thermoelectric of claim 31, wherein at least one substrate is weakened in order to permit flexing.

33. The flexible thermoelectric of claim 31, wherein the at least one substrate constructed in a non-uniform manner has cuts in a plurality of locations to form sections.

34. The flexible thermoelectric of claim 33, wherein the thermoelectric is for use with a fluid flow, the cuts being formed in a manner to improve thermal isolation from section to section in at least the direction of fluid flow.

35. The flexible thermoelectric of claim 33, wherein at least one substrate is shaped in a manner to permit flexing.

36. The flexible thermoelectric of claim 31, wherein at least a portion of at least one of the first and second substrates is constructed of a material selected to permit flexing of the thermoelectric.

37. The flexible thermoelectric of claim 31, wherein thermoelectric flexes in at least two directions.

38. The flexible thermoelectric of claim 31, wherein the thermoelectric is constructed with a single layer of thermoelectric elements.

39. The flexible thermoelectric of claim 38, wherein the thermoelectric cools on a first side and heats on a second side, in response to an electrical current.

40. The flexible thermoelectric of claim 31, wherein at least a portion of the thermoelectric has multiple layers of thermoelectric elements.

41. The flexible thermoelectric of claim 40, wherein a first plurality of thermoelectric elements are positioned along a first side of a central substrate and a second plurality of thermoelectric elements are positioned along an opposing side of the central substrate, the first plurality of thermoelectric elements sandwiched between the first substrate and the central substrate, and the second plurality of thermoelectric elements sandwiched between said second substrate and the central substrate.

42. The flexible thermoelectric of claim 41, wherein the thermoelectric provides both heating and cooling on one side of the thermoelectric, in response to a current flow.

43. The flexible thermoelectric of claim 31, further comprising at least a first thermal conductor configured to provide heat flow to and/or from the thermoelectric.

44. The flexible thermoelectric of claim 31, further comprising at least a first thermal conductor that strengthens the thermoelectric.

45. A method of constructing a flexible thermoelectric, comprising the steps of:

providing a plurality of thermoelectric elements; and
positioning the thermoelectric elements between first and second substrates, at least one of the substrates being constructed of a substantially rigid material, and configured to permit flexing of the thermoelectric.

46. The method of claim 45, further comprising the step of forming at least one of the substrates in sections to permit flexing.

47. The method of claim 45, further comprising the step of weakening at least one substrate in order to permit flexing.

48. The method of claim 45, further comprising the step of cutting at least one substrate in a plurality of locations in order to permit flexing.

49. The method of claim 48, wherein the thermoelectric is for use with a fluid flow, wherein the cuts are made in a manner to improve thermal isolation from section to section in at least the direction of fluid flow.

50. The method of claim 45, further comprising the step of shaping at least one substrate in a manner to permit flexing.

51. The method of claim 45, further comprising the step of forming at least a portion of at least one substrate of a material selected to permit flexing of the thermoelectric.

52. The method of claim 45, wherein the thermoelectric flexes in at least two directions.

53. The method of claim 45, wherein the step of positioning comprises forming a single layer of thermoelectric elements.

54. The method of claim 45, wherein the step of positioning comprises providing multiple layers of thermoelectric elements for at least a portion of the thermoelectric.

55. The method of claim 54, wherein a first plurality of thermoelectric elements are positioned along a first side of a central substrate and a second plurality of thermoelectric elements are positioned along an opposing side of the central substrate, the first plurality of thermoelectric elements sandwiched between the first substrate and the central substrate, and the second plurality of thermoelectric elements sandwiched between said second substrate and the central substrate.

56. The method of claim 55, wherein the thermoelectric provides both heating and cooling on one side of the thermoelectric, in response to a current flow.

57. The method of claim 56, further comprising the step of positioning at least a first thermal conductor that strengthens the thermoelectric.