

(19) **United States**

(12) **Patent Application Publication**
KITAJIMA et al.

(10) **Pub. No.: US 2019/0321758 A1**

(43) **Pub. Date: Oct. 24, 2019**

(54) **FILTER DEVICE AND FILTRATION DEVICE**

B01D 29/23 (2006.01)

F15B 21/041 (2006.01)

(71) Applicant: **YAMASHIN-FILTER CORP.**,
Kanagawa (JP)

(52) **U.S. Cl.**

CPC *B01D 29/58* (2013.01); *B01D 29/21*

(2013.01); *B01D 2201/301* (2013.01); *F15B*

21/041 (2013.01); *B01D 29/232* (2013.01)

(72) Inventors: **Nobuyuki KITAJIMA**, Kanagawa (JP);
Mitsunobu OKAMOTO, Kanagawa (JP)

(21) Appl. No.: **16/460,750**

(57)

ABSTRACT

(22) Filed: **Jul. 2, 2019**

Related U.S. Application Data

(63) Continuation of application No. PCT/JP2018/
003798, filed on Feb. 5, 2018.

(30) **Foreign Application Priority Data**

Feb. 13, 2017 (JP) 2017-024479


Publication Classification

(51) **Int. Cl.**

B01D 29/58 (2006.01)

B01D 29/21 (2006.01)

A filter element having a substantially cylindrical shape is provided inside a filter case that is provided with a plurality of opening portions in a side surface and has a bottomed substantially cylindrical shape. A fluid flows into a hollow portion of the filter element from an inflow portion provided between a bottom surface of the filter case and the filter element in a height direction. Further, an inner tube provided inside a filtration material having a substantially cylindrical shape includes a first region that is formed with an opening portion substantially on the entire surface and a second region that is not formed with an opening portion. The second region is provided below the first region to include a lower end of the inner tube.

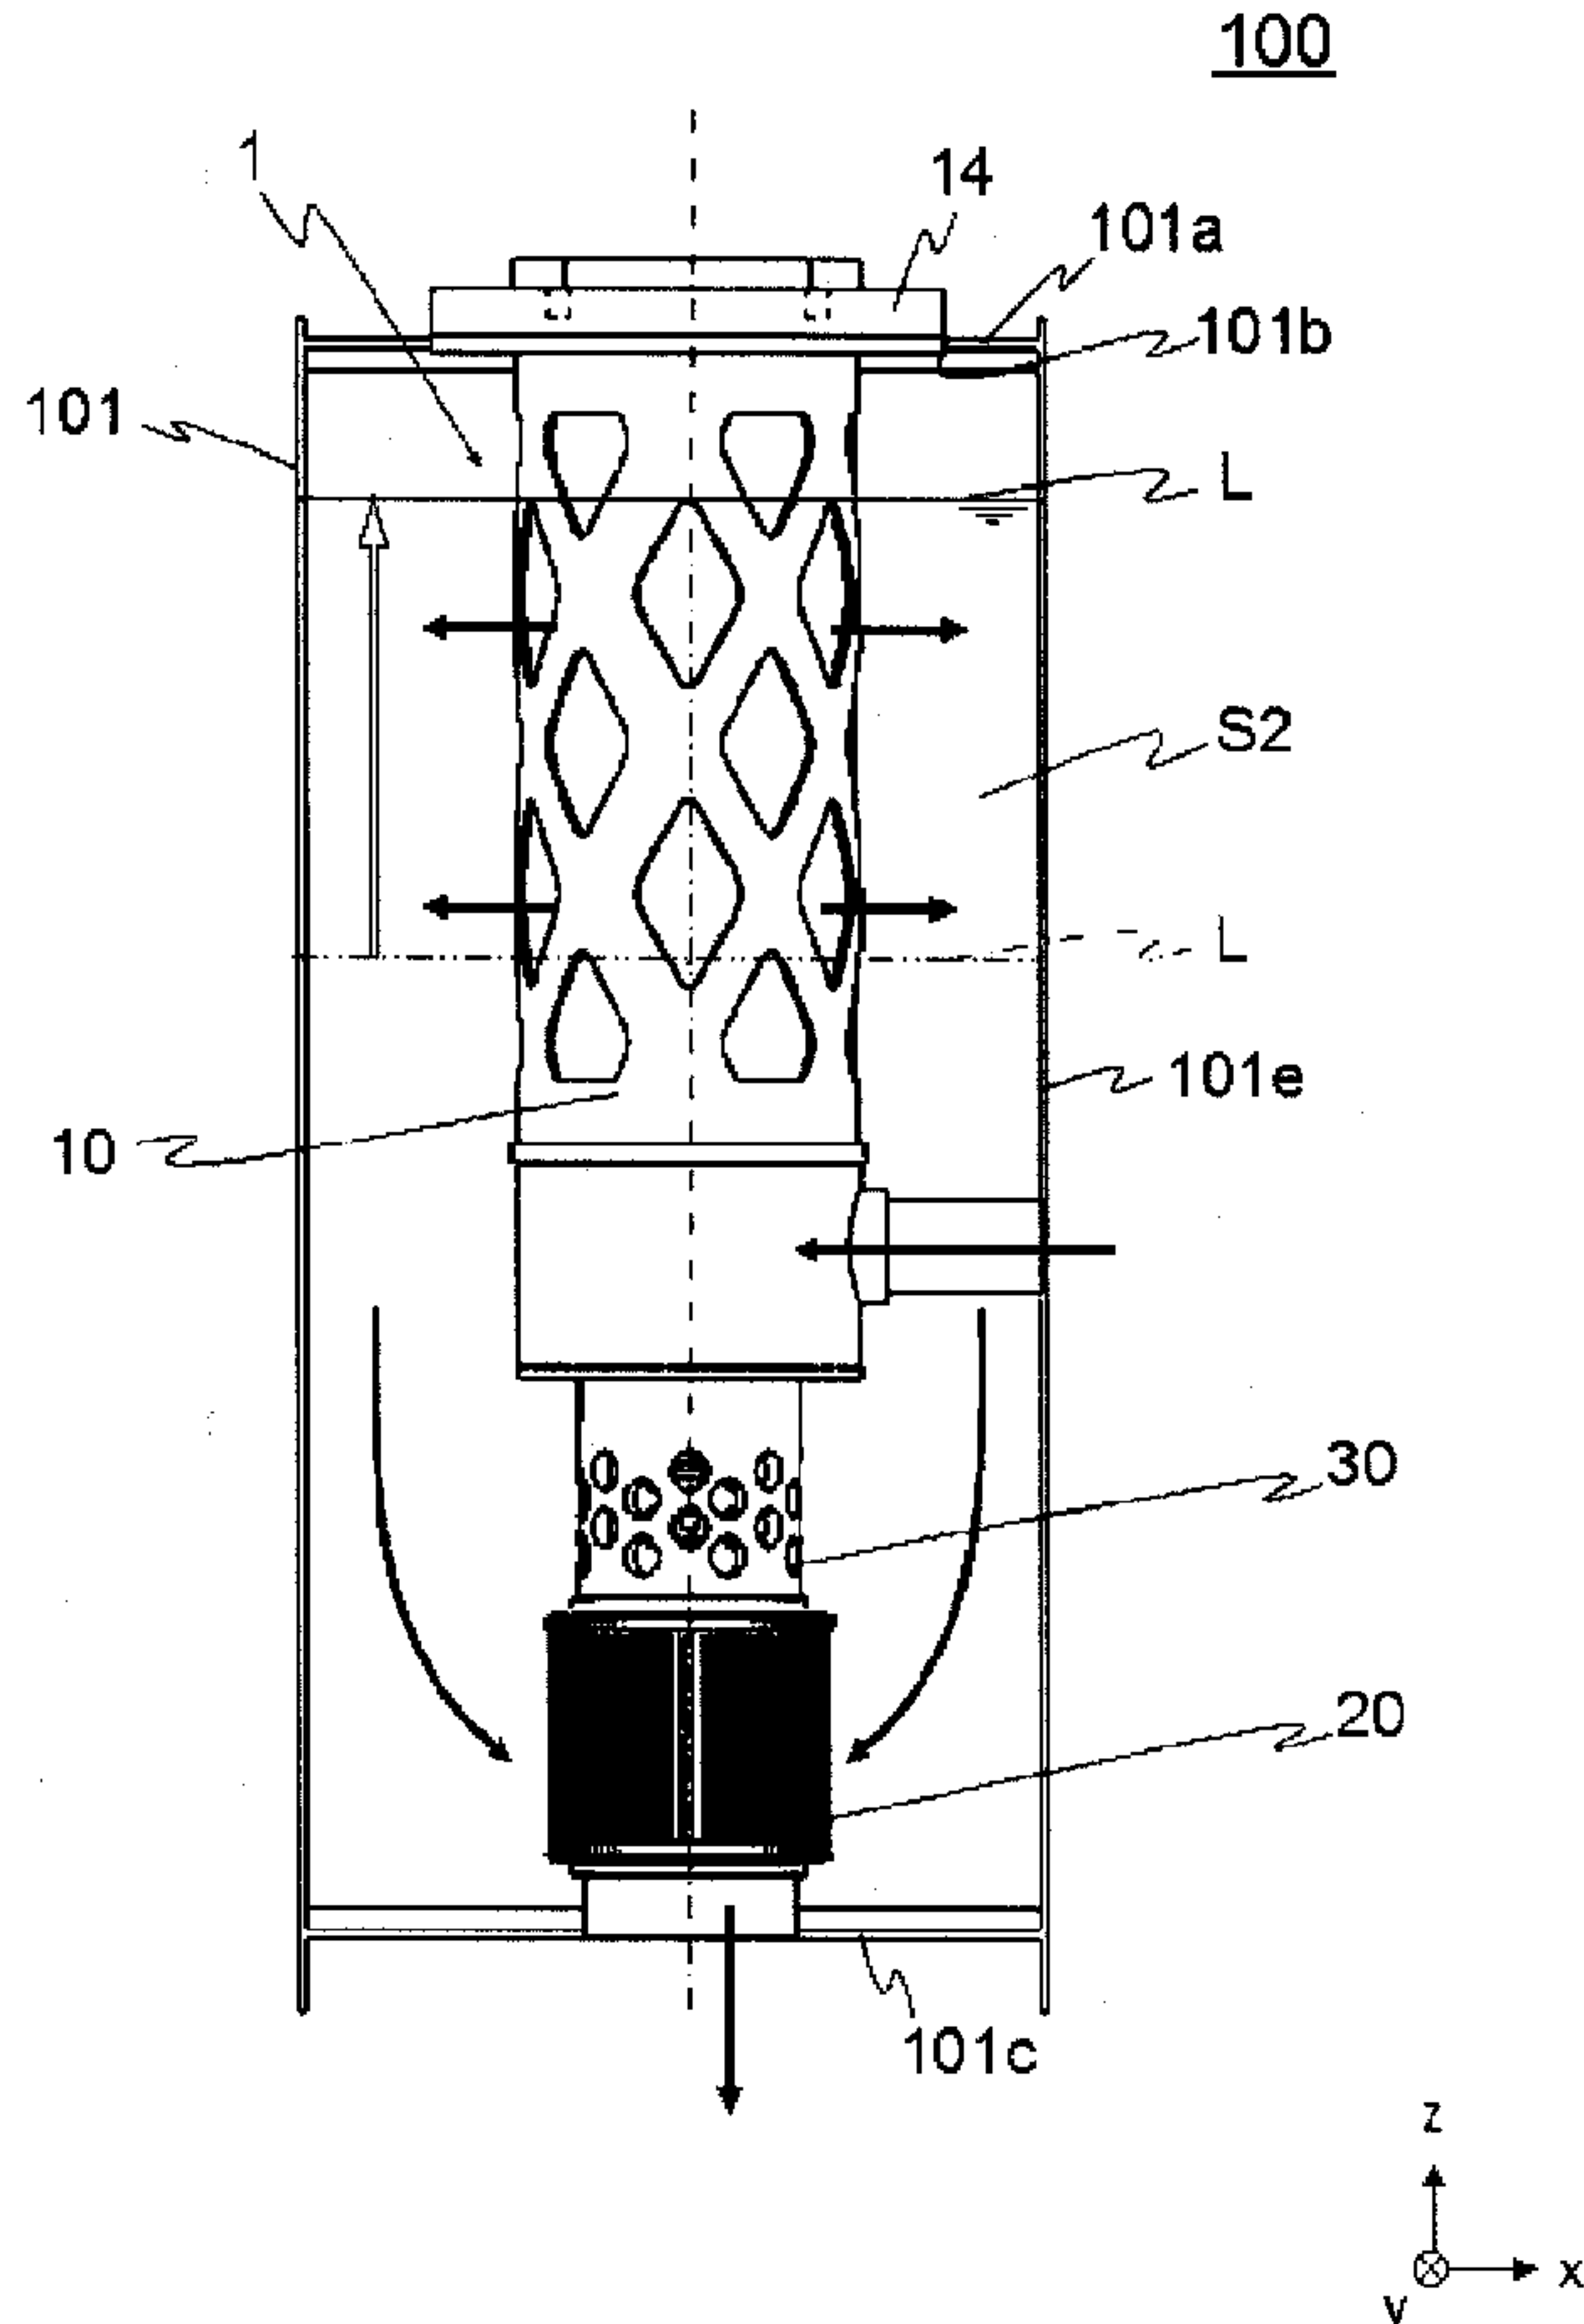

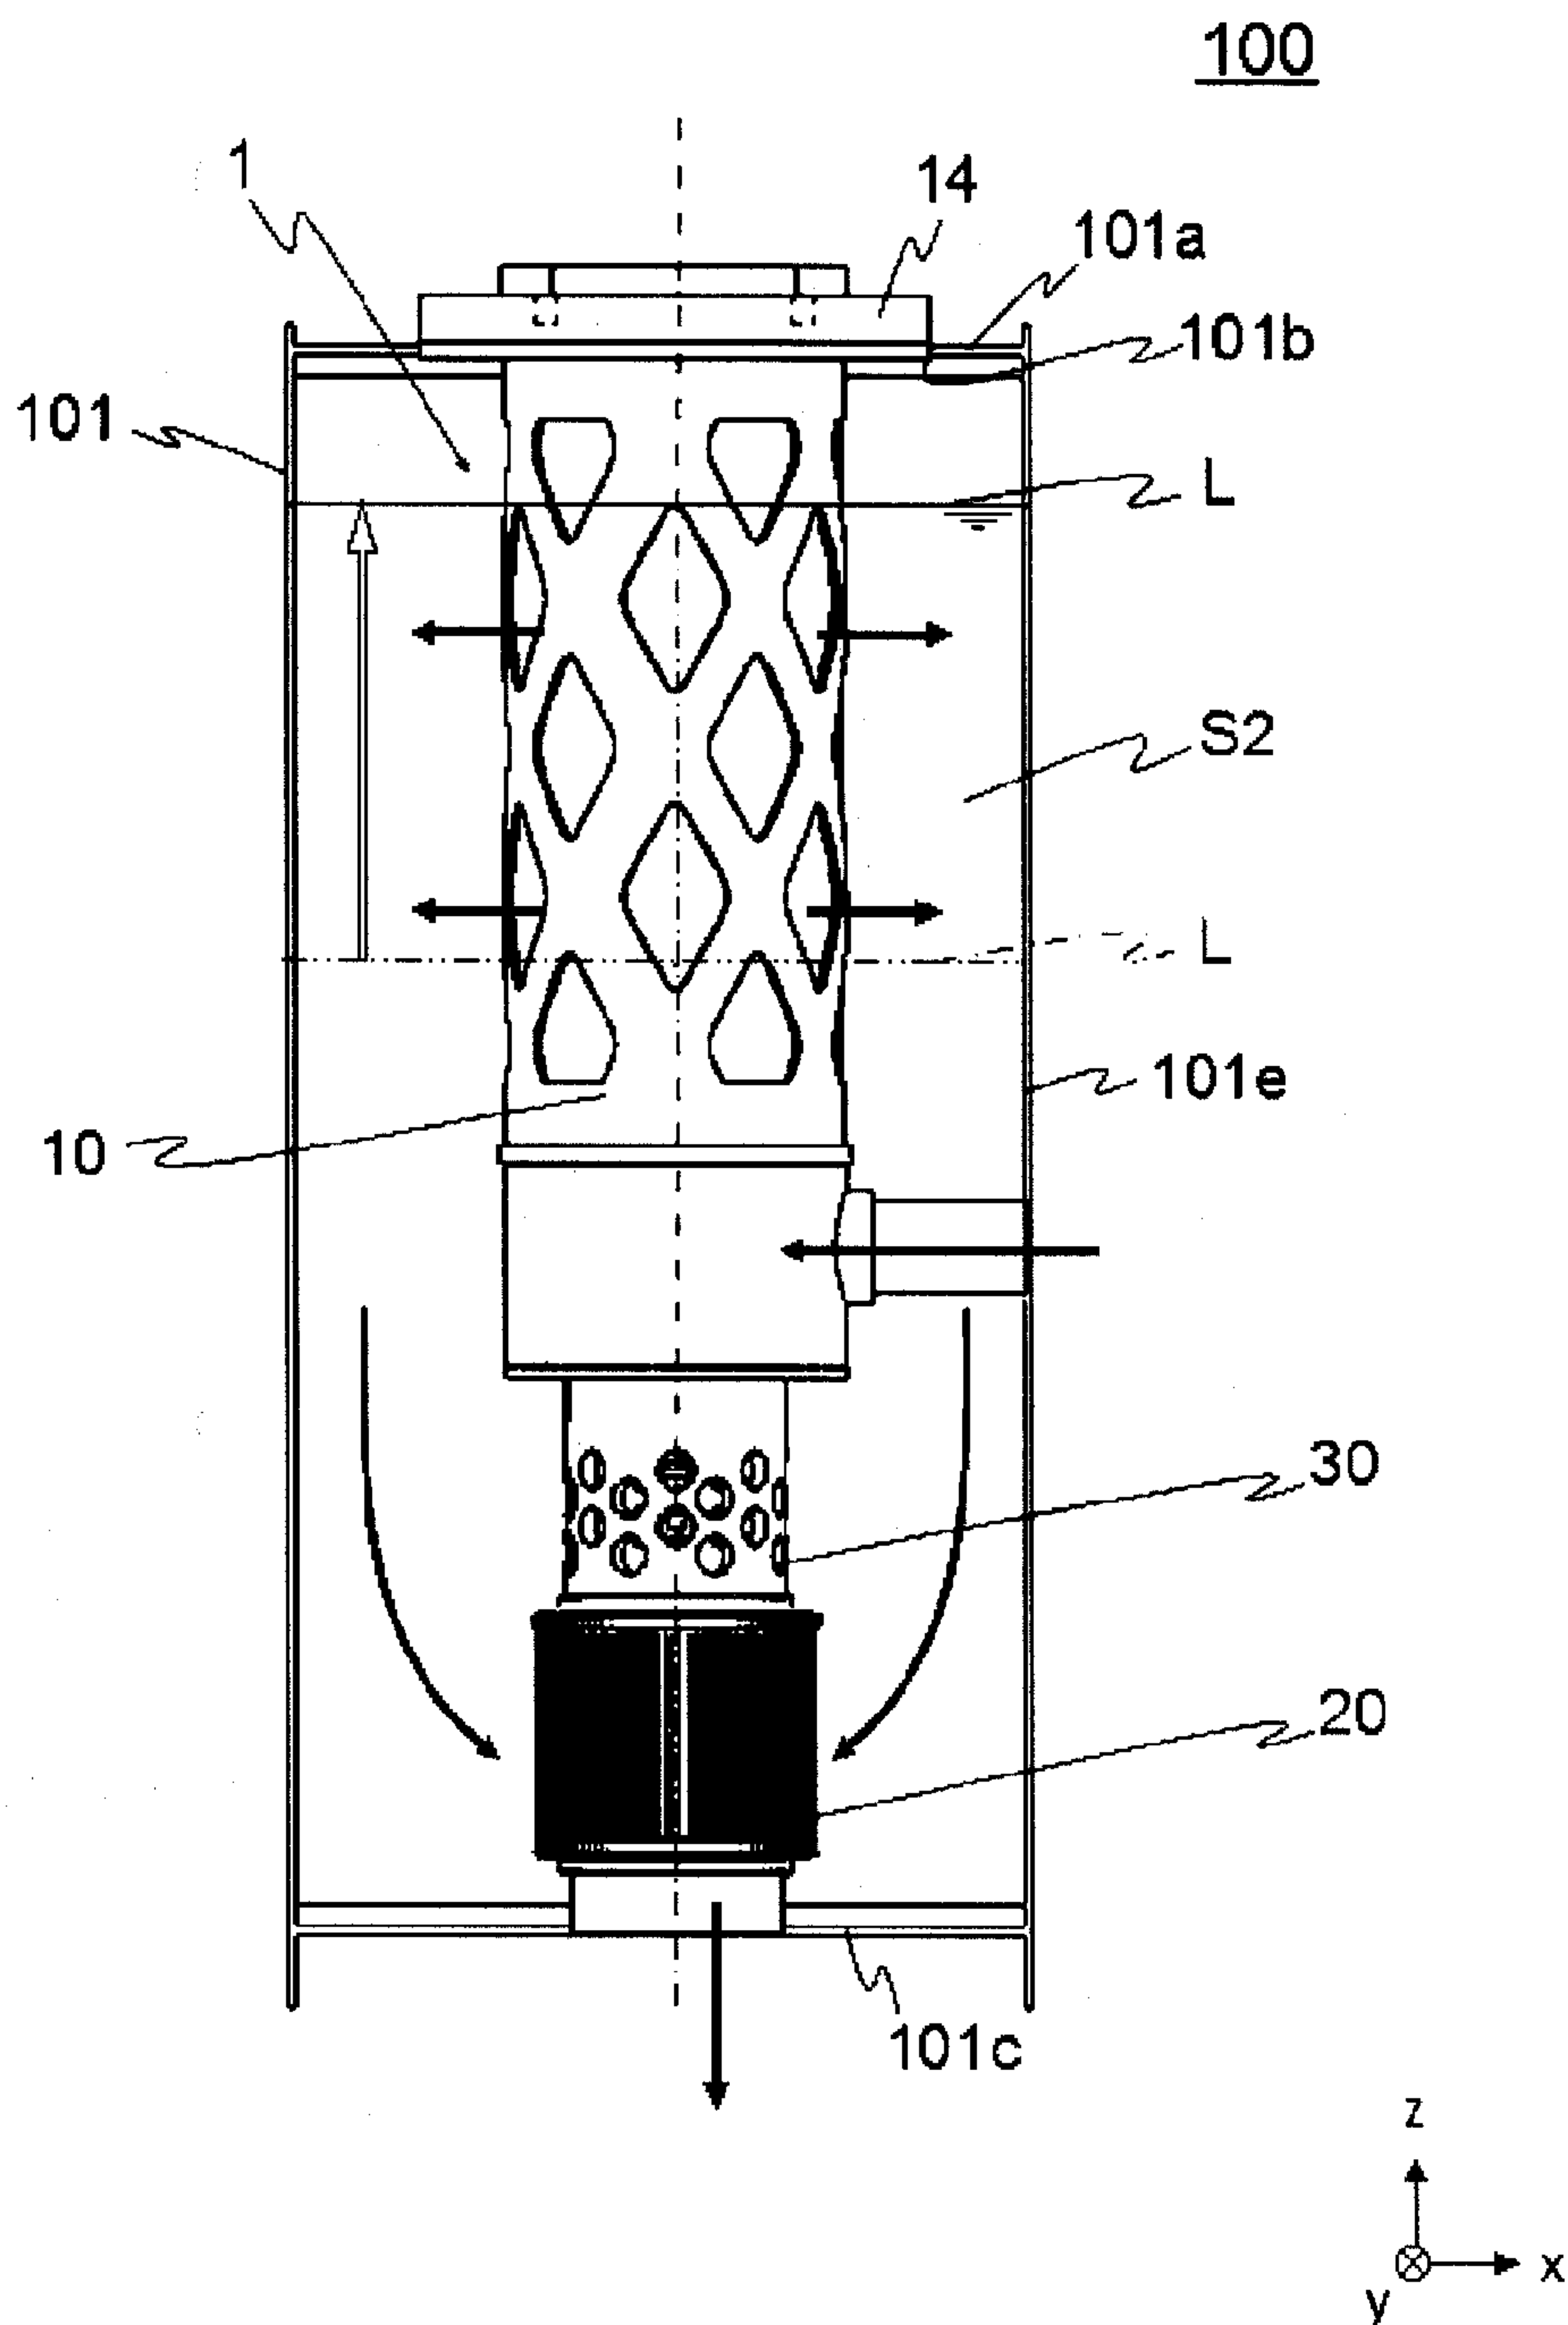


FIG. 1

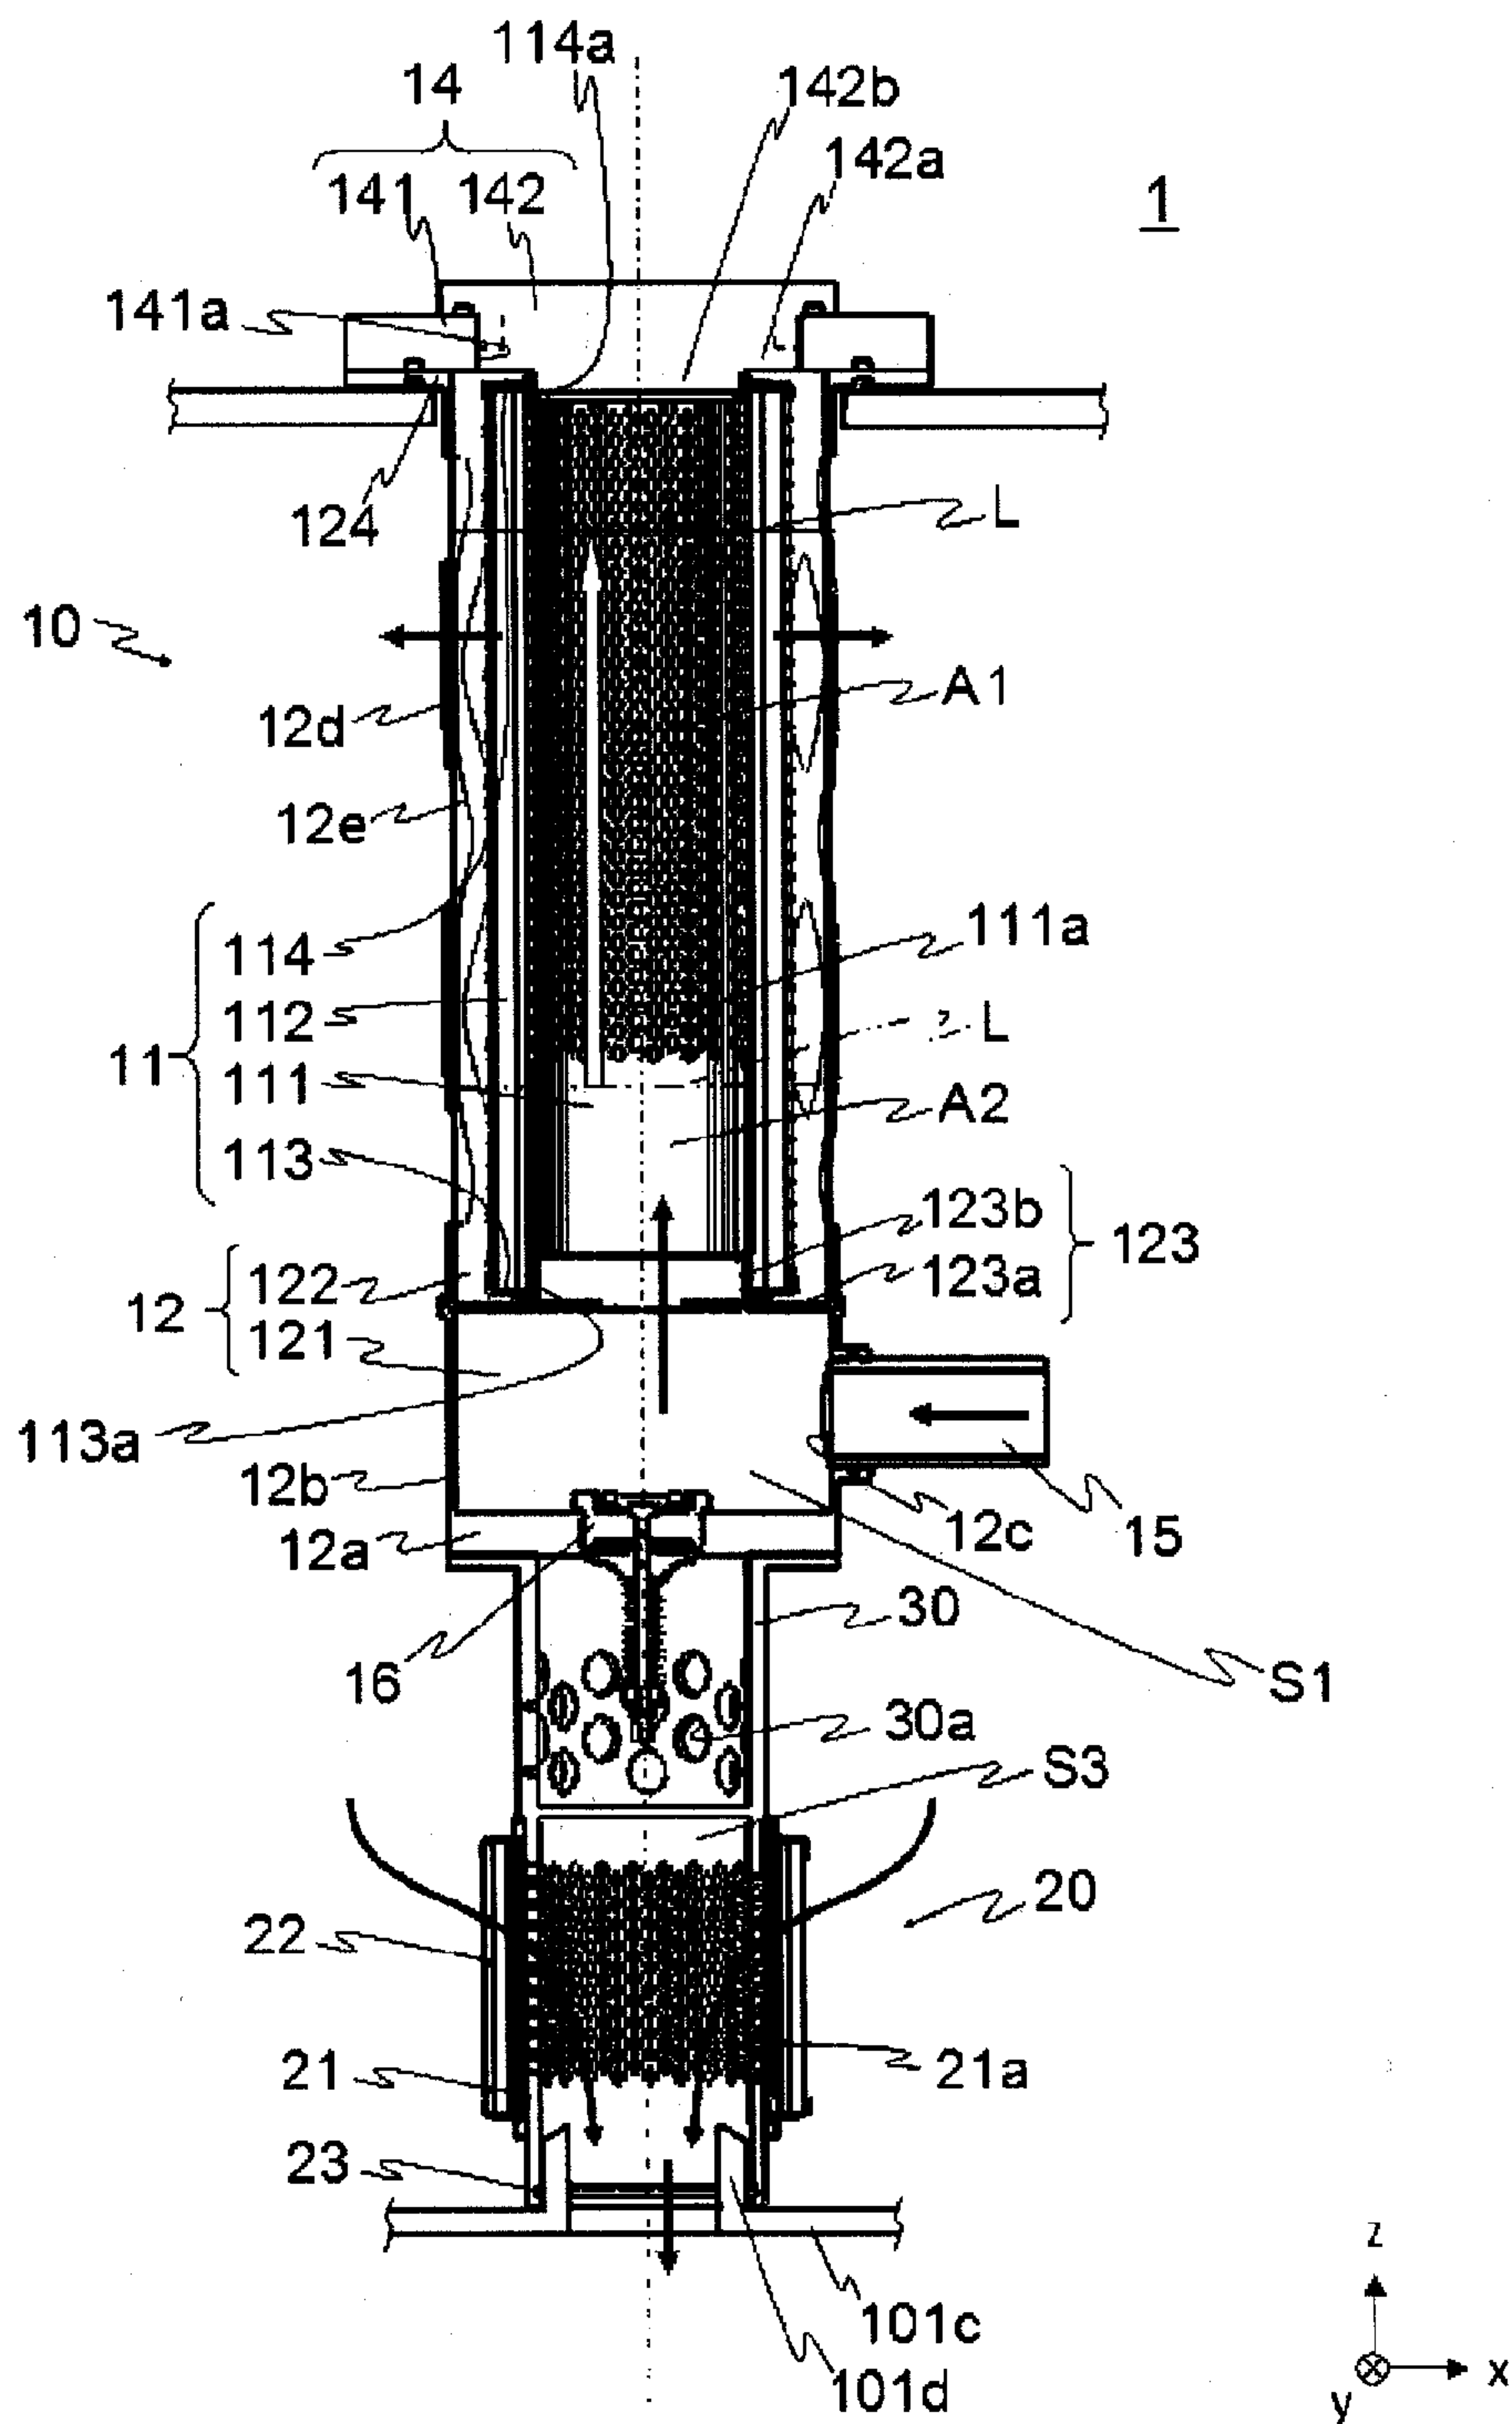


FIG. 2

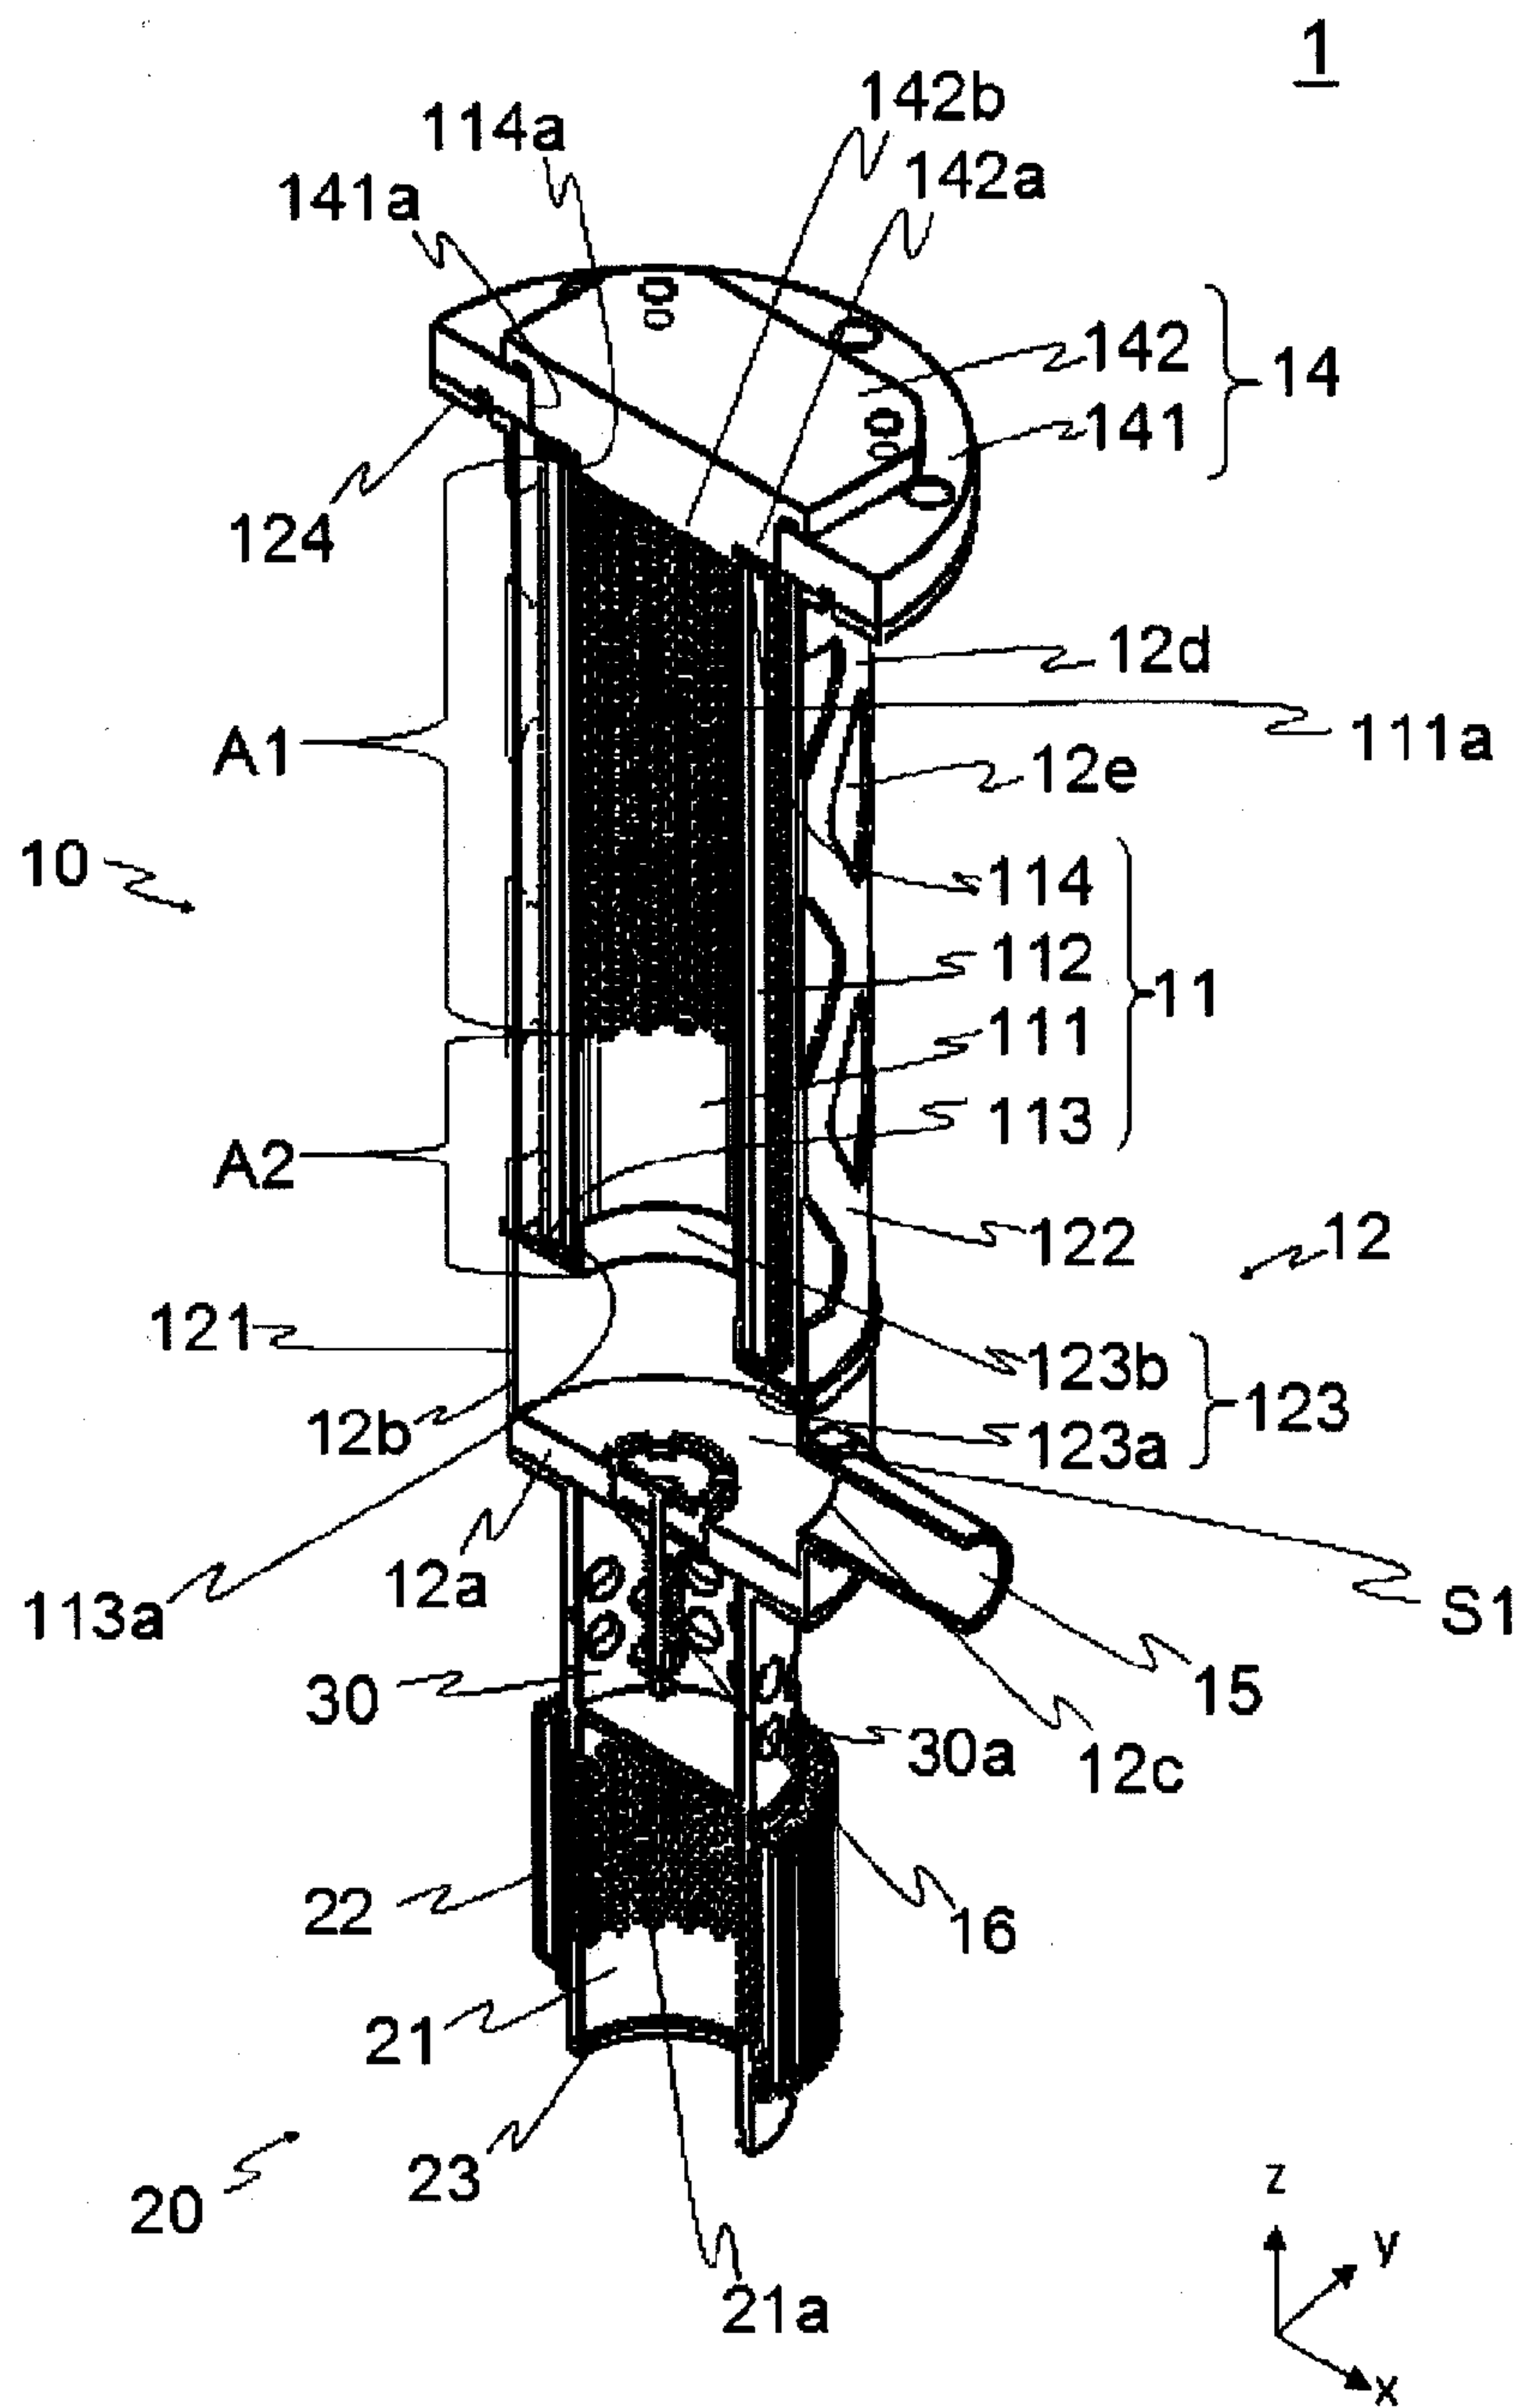


FIG. 3

FILTER DEVICE AND FILTRATION DEVICE**CROSS-REFERENCE TO RELATED APPLICATIONS**

[0001] This application is a continuation application of International Patent Application No. PCT/JP2018/003798 filed on Feb. 5, 2018, which claims priority to Japanese Patent Application No. 2017-024479 filed on Feb. 13, 2017, the entire contents of which are incorporated by reference.

TECHNICAL FIELD

[0002] The present invention relates to a filter device and a filtration device.

BACKGROUND ART

[0003] Patent Document 1 discloses a filtration device including a first filtration unit that includes a cylindrical filtration material and filtrates liquid to be filtrated by passing the liquid to be filtrated from the inside to the outside, and a second filtration unit that further filtrates the liquid that has passed through the first filtration unit. In the filtration device, the first filtration unit and the second filtration unit are disposed in a tank in posture to overlap each other in a state the second filtration unit abutting one end of the first filtration unit. This makes it possible to reduce the size of the tank and improve a degree of freedom of the design, and to simplify a structure of the tank.

CITATION LIST

Patent Document

[0004] Patent Document 1: JP 2008-290004 A

[0005] However, in the invention described in Patent Document 1, liquid flows from a position higher than a liquid surface to the first filtration unit, and thus there is a risk that the incoming liquid may cause liquid stored inside the first filtration unit to foam. Further, in the invention described in Patent Document 1, there is a risk that foam included in the stored liquid may flow into the second filtration unit together with the liquid.

[0006] When air passes through the filtration device together with the liquid, there is a risk that a malfunction may occur in a pump due to suction of air by the pump, or damage and the like may occur in a component due to temporarily extremely high temperature and pressure of hydraulic oil caused by air bubbles being ruptured and the like in a hydraulic circuit.

[0007] Further, in the invention described in Patent Document 1, there is a risk that dust trapped by the filtration may fall into the tank when a filter element is replaced.

SUMMARY OF INVENTION

[0008] One or more embodiments of the present invention are directed to a filter device and a filtration device capable of preventing air bubbles from flowing out of a tank together with liquid during filtration, and preventing dust and the like trapped by the filtration from falling into the tank when a filter element is replaced.

[0009] A filter device according to one or more embodiments of the present invention is a filter device that includes, for example, a first filtration unit provided to protrude from an upper surface of a tank toward the inside of the tank, and

a second filtration unit provided below the first filtration unit to overlap the first filtration unit in a plan view and having a substantially cylindrical shape. The first filtration unit includes a filter case that is provided with a plurality of opening portions in a side surface and has a bottomed substantially cylindrical shape, a lid member that covers an opening end of an upper portion of the filter case, a filter element that is provided inside the filter case and has a substantially cylindrical shape, and an inflow portion that is configured to allow a fluid to flow into a hollow portion of the filter element and is provided between a bottom surface of the filter case and the filter element in a height direction. The lid member is detachably provided on the filter case. The filter element is detachably provided on the filter case via the opening end. The filter element includes a filtration material that has a substantially cylindrical shape, and an inner tube that has substantially the same height as that of the filtration material, is provided inside the filtration material, and has a substantially cylindrical shape. The inner tube includes a first region that is formed with an opening portion substantially on the entire surface and a second region that is not formed with the opening portion. The second region is provided below the first region to include a lower end of the inner tube.

[0010] According to the filter device according to one or more embodiments of the present invention, the filter element having the substantially cylindrical shape is provided inside the filter case that is provided with the plurality of opening portions in the side surface and has the bottomed substantially cylindrical shape. The fluid flows into the hollow portion of the filter element from the inflow portion provided between the bottom surface of the filter case and the filter element in the height direction. In this way, air bubbles can be prevented from flowing out of the tank together with liquid. Further, the inner tube provided inside the filtration material having the substantially cylindrical shape includes the first region that is formed with the opening portion substantially on the entire surface and the second region that is not formed with the opening portion. The second region is provided below the first region to include the lower end of the inner tube. In this way, when the filter element is replaced, dust and the like trapped between the inner tube and the filtration material can be prevented from falling into the tank.

[0011] Here, the second region may be substantially greater than or equal to $\frac{1}{4}$ of the entire height of the inner tube. In this way, the dust can be reliably trapped between the inner tube and the filtration material.

[0012] A filtration device according to one or more embodiments of the present invention includes, for example, a tank, and a filter device including a first filtration unit provided to protrude from an upper surface of the tank toward the inside of the tank, and a second filtration unit provided below the first filtration unit to overlap the first filtration unit in a plan view and having a substantially cylindrical shape. The first filtration unit includes a filter case that is provided with a plurality of opening portions in a side surface and has a bottomed substantially cylindrical shape, a lid member that covers an opening end of an upper portion of the filter case, a filter element that is provided inside the filter case and has a substantially cylindrical shape, and an inflow portion that is configured to allow a fluid to flow into a hollow portion of the filter element and is provided between a bottom surface of the filter case and

the filter element in a height direction. The lid member is detachably provided on the filter case. The filter element is detachably provided on the filter case via the opening end. The filter element includes a filtration material that has a substantially cylindrical shape, and an inner tube that has substantially the same height as that of the filtration material, is provided inside the filtration material, and has a substantially cylindrical shape. The inner tube includes a first region that is formed with an opening portion (e.g., openings) substantially on the entire surface and a second region that is not formed with the opening portion. The second region is provided below the first region to include a lower end of the inner tube. In this way, air bubbles can be prevented from flowing out of a tank together with liquid during filtration, and dust and the like trapped by the filtration can be prevented from falling into the tank when a filter element is replaced.

[0013] According to one or more embodiments of the present invention, air bubbles can be prevented from flowing out of the tank together with liquid during filtration, and dust and the like trapped by the filtration can be prevented from falling into the tank when the filter element is replaced.

BRIEF DESCRIPTION OF DRAWINGS

[0014] FIG. 1 is a diagram illustrating an overview of a hydraulic oil tank 100 provided, inside the hydraulic oil tank 100, with a filter device 1 according to an embodiment of the present invention.

[0015] FIG. 2 is a cross-sectional view illustrating an overview of the filter device 1.

[0016] FIG. 3 is a perspective view illustrating an overview of the filter device 1 when cut along a center line.

DESCRIPTION OF EMBODIMENTS

[0017] Below, detailed description of embodiments of the present invention will be given with reference to drawings. Hereinafter, hydraulic oil is described as an example of a fluid, but the present invention is applicable to various fluids other than the hydraulic oil.

[0018] FIG. 1 is a diagram illustrating an overview of a hydraulic oil tank 100 provided, inside the hydraulic oil tank 100, with a filter device 1 according to an embodiment of the present invention. In FIG. 1, main parts of the hydraulic oil tank 100 are illustrated in a perspective view, and some parts are illustrated in a cross-sectional view (however, hatching indicating a cross section is omitted).

[0019] The hydraulic oil tank 100 is installed in a work machine (a hydraulic device, for example, not illustrated), and is provided inside a hydraulic circuit of hydraulic oil supplied to the hydraulic device and is configured to store the hydraulic oil. In the hydraulic circuit, the hydraulic oil passes through the hydraulic device and is introduced into the hydraulic oil tank 100.

[0020] The hydraulic oil tank 100 includes a tank main body 101 having a box shape, for example, and this tank main body 101 has a cavity inside. The tank main body 101 primarily includes the filter device 1 therein.

[0021] A hole 101b into which the filter device 1 is inserted is formed in an upper surface 101a of the tank main body 101. The filter device 1 is fixed to the tank main body 101 by providing a lid member 14 and the like (described later in detail) of the filter device 1 on an upper surface of the upper surface 101a.

[0022] Next, the filter device 1 will be described. The filter device 1 primarily includes a first filtration unit 10, a second filtration unit 20, and a third unit 30. The first filtration unit 10 and the third unit 30 have a bottomed substantially cylindrical shape, and the second filtration unit 20 has a substantially cylindrical shape.

[0023] The second filtration unit 20 and the third unit 30 are provided below the first filtration unit 10 to overlap the first filtration unit 10 in a plan view (when viewed from a z-direction). The second filtration unit 20 is provided near a bottom surface 101c of the tank main body 101. The third unit 30 is provided between the first filtration unit 10 and the second filtration unit 20.

[0024] The first filtration unit 10, the second filtration unit 20, and the third unit 30 have substantially the same orientation for a central axis. In the present embodiment, the central axes of the first filtration unit 10, the second filtration unit 20, and the third unit 30 substantially match, but these may not substantially match.

[0025] FIG. 2 is a cross-sectional view illustrating an overview of the filter device 1. FIG. 3 is a perspective view illustrating an overview of the filter device 1, and is a diagram illustrating a state where the filter device 1 is cut along a center line. In FIGS. 2 and 3, hatching indicating a cross section is omitted.

[0026] The first filtration unit 10 includes a filter element 11, a filter case 12, a lid member 14, an inflow pipe 15, and a valve 16.

[0027] The filter element 11 is a member having a substantially cylindrical shape as a whole and is provided inside the filter case 12. The filter element 11 primarily includes an inner tube 111, a filtration material 112, and plates 113 and 114.

[0028] The filtration material 112 is configured to filtrate the hydraulic oil, and has a substantially cylindrical shape with a thickness in a radial direction. The filtration material 112 is formed by pleating a filter paper formed of a synthetic resin, paper, or the like, and connecting both ends of the pleated filter paper to roll into a cylindrical shape.

[0029] The inner tube 111 is a substantially cylindrical member made of metal and is provided inside the filtration material 112. The height of the inner tube 111 is substantially the same as the height of the filtration material 112.

[0030] The inner tube 111 includes a first region A1 in which an opening portion 111a through which the hydraulic oil passes is formed on substantially the entire surface, and a second region A2 in which the opening portion 111a is not formed. The second region A2 is provided below the first region A1 to include a lower end of the inner tube 111.

[0031] In the present embodiment, the second region A2 is substantially $\frac{1}{4}$ of the entire height of the inner tube 111, but the height of the second region A2 is not limited to this. However, in order to prevent dust and the like from leaking out, the second region A2 is preferably substantially greater than or equal to $\frac{1}{4}$ of the entire height of the inner tube 111. Further, the second region A2 is preferably less than or equal to $\frac{1}{3}$ to half of the height of the first region A1 not to impede a flow of the hydraulic oil.

[0032] The plate 113 is provided on lower ends and the plate 114 is provided on upper ends of the inner tube 111 and the filtration material 112. The plate 113 and the plate 114 are members having a substantially circular plate shape or a bottomed substantially cylindrical shape, and are formed by

using a resin or a metal. The plate **113** and the plate **114** respectively have opening portions **113a** and **114a** formed substantially at the center.

[0033] The filter case **12** is a member having a bottomed substantially cylindrical shape as a whole, and is formed of a metal. The filter case **12** primarily includes a first case **121**, a second case **122**, and mounting members **123** and **124**. The second case **122** is integrally formed above the first case **121**.

[0034] The first case **121** is a bottomed substantially cylindrical member, and the valve **16** is provided on a bottom surface **12a**. The valve **16** opens and closes in response to a difference between the pressure inside the first case **121** (space **S1**) and the pressure inside the tank main body **101** (space **S2**, see FIG. 1).

[0035] An opening **12c** in which the inflow pipe **15** is provided is formed in a side surface **12b** of the first case **121**. The inflow pipe **15** is provided between the bottom surface **12a** and the filter element **11** in a height direction (*z*-direction). The inflow pipe **15** penetrates a side surface **101e** of the tank main body **101** (see FIG. 1), and communicates with the inside of the filter case **12** and the outside of the tank main body **101**. The hydraulic oil flowing in from the inflow pipe **15** passes through the inside of the first case **121** and is guided into a hollow portion of the filter element **11**, in the space **S1**.

[0036] The second case **122** is a substantially cylindrical member with the filter element **11** provided therein.

[0037] A plurality of holes **12e** are formed in a side surface **12d** of the second case **122**. A wire mesh (not illustrated) formed by weaving a metal wire rod is provided in the hole **12e**. The hydraulic oil that has passed through the filtration material **112** passes through gaps of the wire mesh in the hole **12e**. The gaps of the wire mesh in the hole **12e** correspond to a plurality of opening portions.

[0038] The mounting member **123** is provided on a lower end surface of the second case **122**. The mounting member **123** includes a bottom surface portion **123a** having a substantially disk shape, and a cylindrical portion **123b** that protrudes upward along an inner peripheral surface of the bottom surface portion **123a**. The filter element **11** (here, a lower surface of the plate **113**) is placed on the bottom surface portion **123a**. The cylindrical portion **123b** is inserted into the opening portion **113a**. In this way, the inside of the first case **121** and the hollow portion of the filter element **11** communicate with each other.

[0039] The mounting member **124** is provided near an upper end of the side surface **12d**. The lid member **14** is mounted on the upper surface **101a** via the mounting member **124**. Note that the mounting member **124** is not necessarily required.

[0040] The lid member **14** is a substantially plate-like member that covers an opening end of an upper portion of the filter case **12**. The lid member **14** is detachably provided on the filter case **12**.

[0041] The lid member **14** includes a first lid **141** and a second lid **142**. The first lid **141** has a substantially disk shape, and includes a hollow portion **141a** formed substantially at the center. Protruding portions **142a** and **142b** that have a substantially columnar shape and protrude downward are formed substantially at the center of the second lid **142**. The protruding portion **142a** is inserted into the hollow portion **141a**. The protruding portion **142b** is inserted into the opening portion **114a**.

[0042] When the lid member **14** (here, the second lid **142**) is removed from the filter case **12**, the filter element **11** can be withdrawn from the opening end of the upper portion of the filter case **12**. When the lid member **14** is mounted on the filter case **12**, the filter element **11** is provided inside the second case **122** by being sandwiched by the second lid **142** and the mounting member **123**.

[0043] Note that, in the present embodiment, the lid member **14** includes the first lid **141** having substantially a disk shape and the second lid **142**, but a manner of the lid member **14** is not limited to this. For example, the lid member **14** may be one component.

[0044] The second filtration unit **20** is, for example, a suction strainer for preventing an entry of foreign substances into the hydraulic pump. The second filtration unit **20** primarily includes a main body portion **21** having a substantially cylindrical shape made of metal, and a filtration material **22** provided outside the main body portion **21**.

[0045] The main body portion **21** is a substantially cylindrical member made of metal, and a plurality of holes **21a** are formed in a side surface. The filtration material **22** is formed by pleating a wire mesh formed by weaving a metal wire rod, and connecting both ends of the pleated wire mesh to roll into a cylindrical shape.

[0046] An outflow portion **101d** is formed on the bottom surface **101c** of the tank main body **101** (see FIG. 2). The outflow portion **101d** is formed to protrude from the bottom surface **101c** into the tank main body **101** and is inserted into the main body portion **21**. A sealing member **23** (for example, an O-ring) is provided between the outflow portion **101d** and the main body portion **21** such that liquid filtrated by the second filtration unit **20** does not leak into the tank main body **101**.

[0047] Note that, in the present embodiment, the outflow portion **101d** inserted into the main body portion **21** is formed on the bottom surface **101c**, but a position of the outflow portion **101d** is not limited to this. For example, a substantially L-shaped outflow portion may be formed near a lower end portion of the side surface **101e**, and a tip thereof may be inserted into the main body portion **21**.

[0048] The third unit **30** is a bottomed substantially cylindrical member made of metal, and is provided below the bottom surface **12a** of the first case **121**. The third unit **30** connects the first filtration unit **10** and the second filtration unit **20**. In the present embodiment, the third unit **30** and the main body portion **21** are integrally formed, but the third unit **30** and the main body portion **21** may be separate components.

[0049] A plurality of holes **30a** through which the hydraulic oil passes are formed in a side surface of the third unit **30**. As the valve **16** opens, fluid existing in the space **S1** flows into the space inside the third unit **30**, then passes through the holes **30a**, and flows into the space **S2**.

[0050] Next, a function of the filter device **1** configured as described above will be described with reference to FIGS. 1 and 2. The arrows in FIGS. 1 and 2 indicate the flow of the hydraulic oil.

[0051] The hydraulic oil flows through the hydraulic circuit during operation of the hydraulic device. As illustrated in FIG. 2, the hydraulic oil flows into the space **S1** via the inflow pipe **15** and the opening **12c**. The hydraulic oil is filtrated by flowing from the inside to the outside of the filter element **11**. The hydraulic oil after the filtration flows out of the plurality of opening portions formed in the side surface

12d (here, the gaps of the wire mesh provided in the hole **12e**) into the space **S2** (see FIG. 1). In this way, the hydraulic oil is filtrated by the first filtration unit **10** and is stored in the hydraulic oil tank **100**.

[0052] In the present embodiment, as illustrated in FIG. 1, the inflow pipe **15** is provided between the bottom surface **12a** of the filter case **12** and the filter element **11** in the height direction. Therefore, a position of the inflow pipe **15** is lower than an oil surface **L**, and the oil surface **L** rises due to the inflow of the hydraulic oil from the inflow pipe **15** (see a chain double-dashed line and a white arrow in FIG. 1).

[0053] As illustrated in FIG. 2, the opening portion **111a** through which the hydraulic oil passes is formed only in the first region **A1**. Therefore, no hydraulic oil passes through the filtration material **112** and the hole **12e** unless the oil surface **L** is higher than the lower side of the first region **A1**. Thus, at a stage when the oil surface **L** rises, a position (outflow position) in the height direction in which the hydraulic oil flows out through the hole **12e** is in the vicinity of the oil surface **L**.

[0054] Since the wire mesh is provided in the hole **12e**, the hydraulic oil can pass through the hole **12e**, but air bubbles can hardly pass therethrough, and particularly, large air bubbles cannot pass through the hole **12e**. Therefore, air bubbles included in the hydraulic oil rise to the oil surface **L** on the inside of the side surface **12d**, and then disappear. Even if air bubbles are mixed in the hydraulic oil flowing out of the hole **12e**, the air bubbles immediately rise to the oil surface **L** and disappear because the outflow position is in the vicinity of the oil surface **L**. In this way, air (air bubbles) hardly flows into the vicinity of the bottom surface **101c** of the tank main body **101**.

[0055] When the oil surface **L** is low, air is included in the hollow portion of the filter element **11**. This initial air is discharged from the space **S1** to the space **S2** via the holes **12e** as the oil surface **L** rises. Therefore, the initial air does not mix with the liquid after filtration.

[0056] The hydraulic oil stored in the space **S2** (in the hydraulic oil tank **100**) is filtrated by the second filtration unit **20** and flows out of the outflow portion **101d**. In this way, the hydraulic oil after filtration is supplied again to the hydraulic device.

[0057] When the filtration is repeated, clogging of the filtration material **112** occurs, and thus the filter element **11** is replaced. The lid member **14** is removed from the filter case **12**, and then the filter element **11** is withdrawn upward. As a result, the filter element **11** is withdrawn from the opening end of the upper portion of the filter case **12**.

[0058] Since the inner tube **111** includes the second region **A2** in which the opening portion **111a** is not formed, dust and residual oil removed by the filtration material **112** accumulates between the inner tube **111** (second region **A2**) and the filtration material **112** and does not leak out of the filter element **11**. Therefore, when the filter element **11** is replaced, the dust and the residual oil accumulated between the inner tube **111** and the filtration material **112** can be prevented from dripping into the second case **122**.

[0059] Subsequently, a new filter element **11** after replacement is inserted from the opening end of the upper portion of the filter case **12**, and the lid member **14** is mounted on the filter case **12**, and then the new filter element **11** is provided inside the second case **122**.

[0060] According to the present embodiment, the second filtration unit **20** and the third unit **30** are provided below the

first filtration unit **10** to overlap the first filtration unit **10** in a plan view, and thus the tank main body **101** can be reduced in size. Further, the inflow pipe **15** is provided between the bottom surface **12a** of the filter case **12** and the filter element **11** in the height direction, and thus air bubbles are released in the vicinity of the oil surface **L**. In this way, the air bubbles can be prevented from flowing out of the hydraulic oil tank **100** together with the hydraulic oil.

[0061] Further, according to the present embodiment, the opening portion **111a** is not formed below the inner tube (second region **A2**), and thus, when the filter element **11** is replaced, the dust and the residual oil accumulated between the inner tube **111** and the filter medium **112** can be prevented from dripping into the second case **122**.

[0062] Note that, in the present embodiment, the plurality of holes **12e** are formed in the side surface **12d**, and the wire mesh (not illustrated) is provided inside the hole **12e**, and thus the plurality of opening portions are formed in the side surface of the second case **122**. However, a manner of the plurality of opening portions is not limited to this. For example, the plurality of opening portions may be formed in the side surface of the second case **122** by forming the entire side surface **12d** with a wire mesh.

[0063] Further, in the present embodiment, the second filtration unit **20** and the third unit **30** are provided below the first filtration unit **10**, but the second filtration unit **20** and the third unit **30** are not necessarily required. However, in order to reduce the size of the tank **101** and to make it difficult for air bubbles to flow into the second filtration unit **20**, the second filtration unit **20** is preferably provided below the first filtration unit **10**.

[0064] Embodiments of the invention have been described in detail with reference to the drawings. However, specific configurations are not limited to the embodiments, and changes in the design or the like are also included within a scope which does not depart from the gist of the invention. For example, the above examples have been explained in detail in order to facilitate understanding of the present invention and are not necessarily limited to examples provided with the entirety of the configuration described above. In addition, the configuration of an embodiment may be partially replaced with the configuration of a different embodiment, or the configuration of the different embodiment may be added to, deleted from, or replaced with the configuration of the embodiment.

[0065] Further, the term “substantially” in the present invention is not to be understood as merely being strictly the same, and is a concept that includes variations and modifications to an extent that does not result in loss in identity. For example, the term “substantially orthogonal” is not limited to being strictly orthogonal, and is a concept that includes errors of several degrees, for example. Further, simple expressions such as orthogonal, parallel, and identical are not to be understood as merely being strictly orthogonal, parallel, identical, and the like, and include being substantially parallel, substantially orthogonal, substantially identical, and the like.

[0066] Furthermore, the meaning of the term “vicinity” in the present invention includes a range of regions (which can be determined as desired) near a position serving as a reference. For example, the term “a vicinity of an end” refers to a range of regions near the end, and is a concept indicating that the end may or may not be included.

REFERENCE SIGNS LIST

- [0067] 1 Filter device
 [0068] 10 First filtration unit
 [0069] 11 Filter element
 [0070] 12 Filter case
 [0071] 12a Bottom surface
 [0072] 12b Side surface
 [0073] 12c Opening
 [0074] 12d Side surface
 [0075] 12e Hole
 [0076] 13 Mounting member
 [0077] 14 Lid member
 [0078] 15 Inflow pipe
 [0079] 16 Valve
 [0080] 20 Second filtration unit
 [0081] 21 Main body portion
 [0082] 21a Hole
 [0083] 22 Filtration material
 [0084] 23 Sealing member
 [0085] 30 Third unit
 [0086] 30a Hole
 [0087] 100 Hydraulic oil tank
 [0088] 101 Tank main body
 [0089] 101a Upper surface
 [0090] 101b Hole
 [0091] 101c Bottom surface
 [0092] 101d Outflow portion
 [0093] 101e Side surface
 [0094] 111 Inner tube
 [0095] 111a: Opening portion
 [0096] 112 Filtration material
 [0097] 113, 114 Plate
 [0098] 113a, 114a Opening portion
 [0099] 121 First case
 [0100] 122 Second case
 [0101] 123 Mounting member
 [0102] 123a Bottom surface portion
 [0103] 123b Cylindrical portion
 [0104] 124 Mounting member
 [0105] 141 First lid
 [0106] 141a Hollow portion
 [0107] 142 Second lid
 [0108] 142a, 142b Protruding portion
1. A filter device, comprising:
 - a first filtration unit that protrudes from an upper surface of a tank toward the inside of the tank; and
 - a second filtration unit provided below the first filtration unit to overlap the first filtration unit in a plan view and having a substantially cylindrical shape,
 wherein the first filtration unit includes:
 - a filter case that is provided with a plurality of opening portions in a side surface and has a bottomed substantially cylindrical shape;
 - a lid member that covers an opening end of an upper portion of the filter case;
 - a filter element that is provided inside the filter case and has a substantially cylindrical shape; and
 - an inflow portion that is configured to allow a fluid to flow into a hollow portion of the filter element and is

provided between a bottom surface of the filter case and the filter element in a height direction, and

wherein:

the lid member is detachably provided on the filter case;

the filter element is detachably provided on the filter case via the opening end;

the filter element includes a filtration material that has a substantially cylindrical shape, and an inner tube that has substantially the same height as that of the filtration material, is provided inside the filtration material, and has a substantially cylindrical shape;

the inner tube includes a first region on which openings are formed substantially entirely such that the fluid is allowed to pass through a side wall of the inner tube, and a second region on which substantially no openings are formed; and

the second region is provided below the first region to include a lower end of the inner tube.

2. The filter device according to claim 1, wherein the second region is substantially greater than or equal to $\frac{1}{4}$ of the entire height of the inner tube.
3. A filtration device, comprising:
 - a tank; and
 - a filter device including a first filtration unit that protrudes from an upper surface of the tank toward the inside of the tank, and a second filtration unit provided below the first filtration unit to overlap the first filtration unit in a plan view and having a substantially cylindrical shape,
 wherein:
 - the first filtration unit includes
 - a filter case that is provided with a plurality of opening portions in a side surface and has a bottomed substantially cylindrical shape;
 - a lid member that covers an opening end of an upper portion of the filter case;
 - a filter element that is provided inside the filter case and has a substantially cylindrical shape; and
 - an inflow portion that is configured to allow a fluid to flow into a hollow portion of the filter element and is provided between a bottom surface of the filter case and the filter element in a height direction, and
 - wherein:
 - the lid member is detachably provided on the filter case;
 - the filter element is detachably provided on the filter case via the opening end;
 - the filter element includes a filtration material that has a substantially cylindrical shape, and an inner tube that has substantially the same height as that of the filtration material, is provided inside the filtration material, and has a substantially cylindrical shape;
 - the inner tube includes a first region on which openings are formed substantially entirely such that the fluid is allowed to pass through a side wall of the inner tube, and a second region on which substantially no openings are formed; and
 - the second region is provided below the first region to include a lower end of the inner tube.

* * * * *