



US007455627B2

(12) **United States Patent**
Goldberg

(10) **Patent No.:** **US 7,455,627 B2**
(45) **Date of Patent:** ***Nov. 25, 2008**

(54) **STATIONARY EXERCISE BICYCLE**

(56) **References Cited**

(75) Inventor: **Johnny Goldberg**, Los Angeles, CA
(US)
(73) Assignee: **Mad Dogg Athletics, Inc.**, Venice, CA
(US)
(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

U.S. PATENT DOCUMENTS

562,198 A	6/1896	Robinson
588,166 A	8/1897	McCoy
633,534 A	9/1899	Read
635,082 A	10/1899	Stiles
671,785 A	4/1901	Young et al.
1,336,774 A	4/1920	Cooper
1,507,554 A	9/1924	Cooper
1,636,327 A	7/1927	Roe
3,062,204 A	11/1962	Stefano
3,511,097 A	5/1970	Corwin
D251,747 S	5/1979	Valentine et al.
4,188,030 A	2/1980	Hooper
D280,117 S	8/1985	Collins
D280,118 S	8/1985	Collins
4,577,860 A	3/1986	Matias
D284,596 S	7/1986	McNeil
4,632,386 A	12/1986	Beech
D289,782 S	5/1987	Symski et al.
D291,462 S *	8/1987	Aalto D21/667
D292,304 S	10/1987	Ostrom
4,768,777 A	9/1988	Yang
4,772,069 A	9/1988	Szymiski

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **11/065,336**

(22) Filed: **Feb. 23, 2005**

(65) **Prior Publication Data**
US 2005/0202938 A1 Sep. 15, 2005

Related U.S. Application Data

(63) Continuation of application No. 10/086,662, filed on Feb. 28, 2002, now Pat. No. 6,881,178, which is a continuation of application No. 09/672,197, filed on Sep. 28, 2000, now Pat. No. 6,468,185, which is a continuation of application No. 09/019,352, filed on Feb. 5, 1998, now Pat. No. 6,155,958, which is a continuation of application No. 08/736,976, filed on Oct. 25, 1996, now Pat. No. 5,722,916, which is a continuation of application No. 08/391,438, filed on Feb. 21, 1995, now abandoned, which is a continuation of application No. 07/969,765, filed on Oct. 30, 1992, now Pat. No. 5,423,728.

(51) **Int. Cl.**
A63B 22/06 (2006.01)

(52) **U.S. Cl.** **482/57**

(58) **Field of Classification Search** **482/57-65**
See application file for complete search history.


(Continued)

Primary Examiner—Steve R Crow
(74) *Attorney, Agent, or Firm*—Jones Day

(57) **ABSTRACT**

A novel stationary exercise bicycle and method for exercising on that bicycle is disclosed. The novel bicycle, comprising a frame having front and rear sockets, a seat mounted into the rear socket, and a handlebar mounted in the front socket, can advantageously be adjusted so that a rider can adopt different riding positions to simulate outdoor bicycle riding conditions.

2 Claims, 5 Drawing Sheets

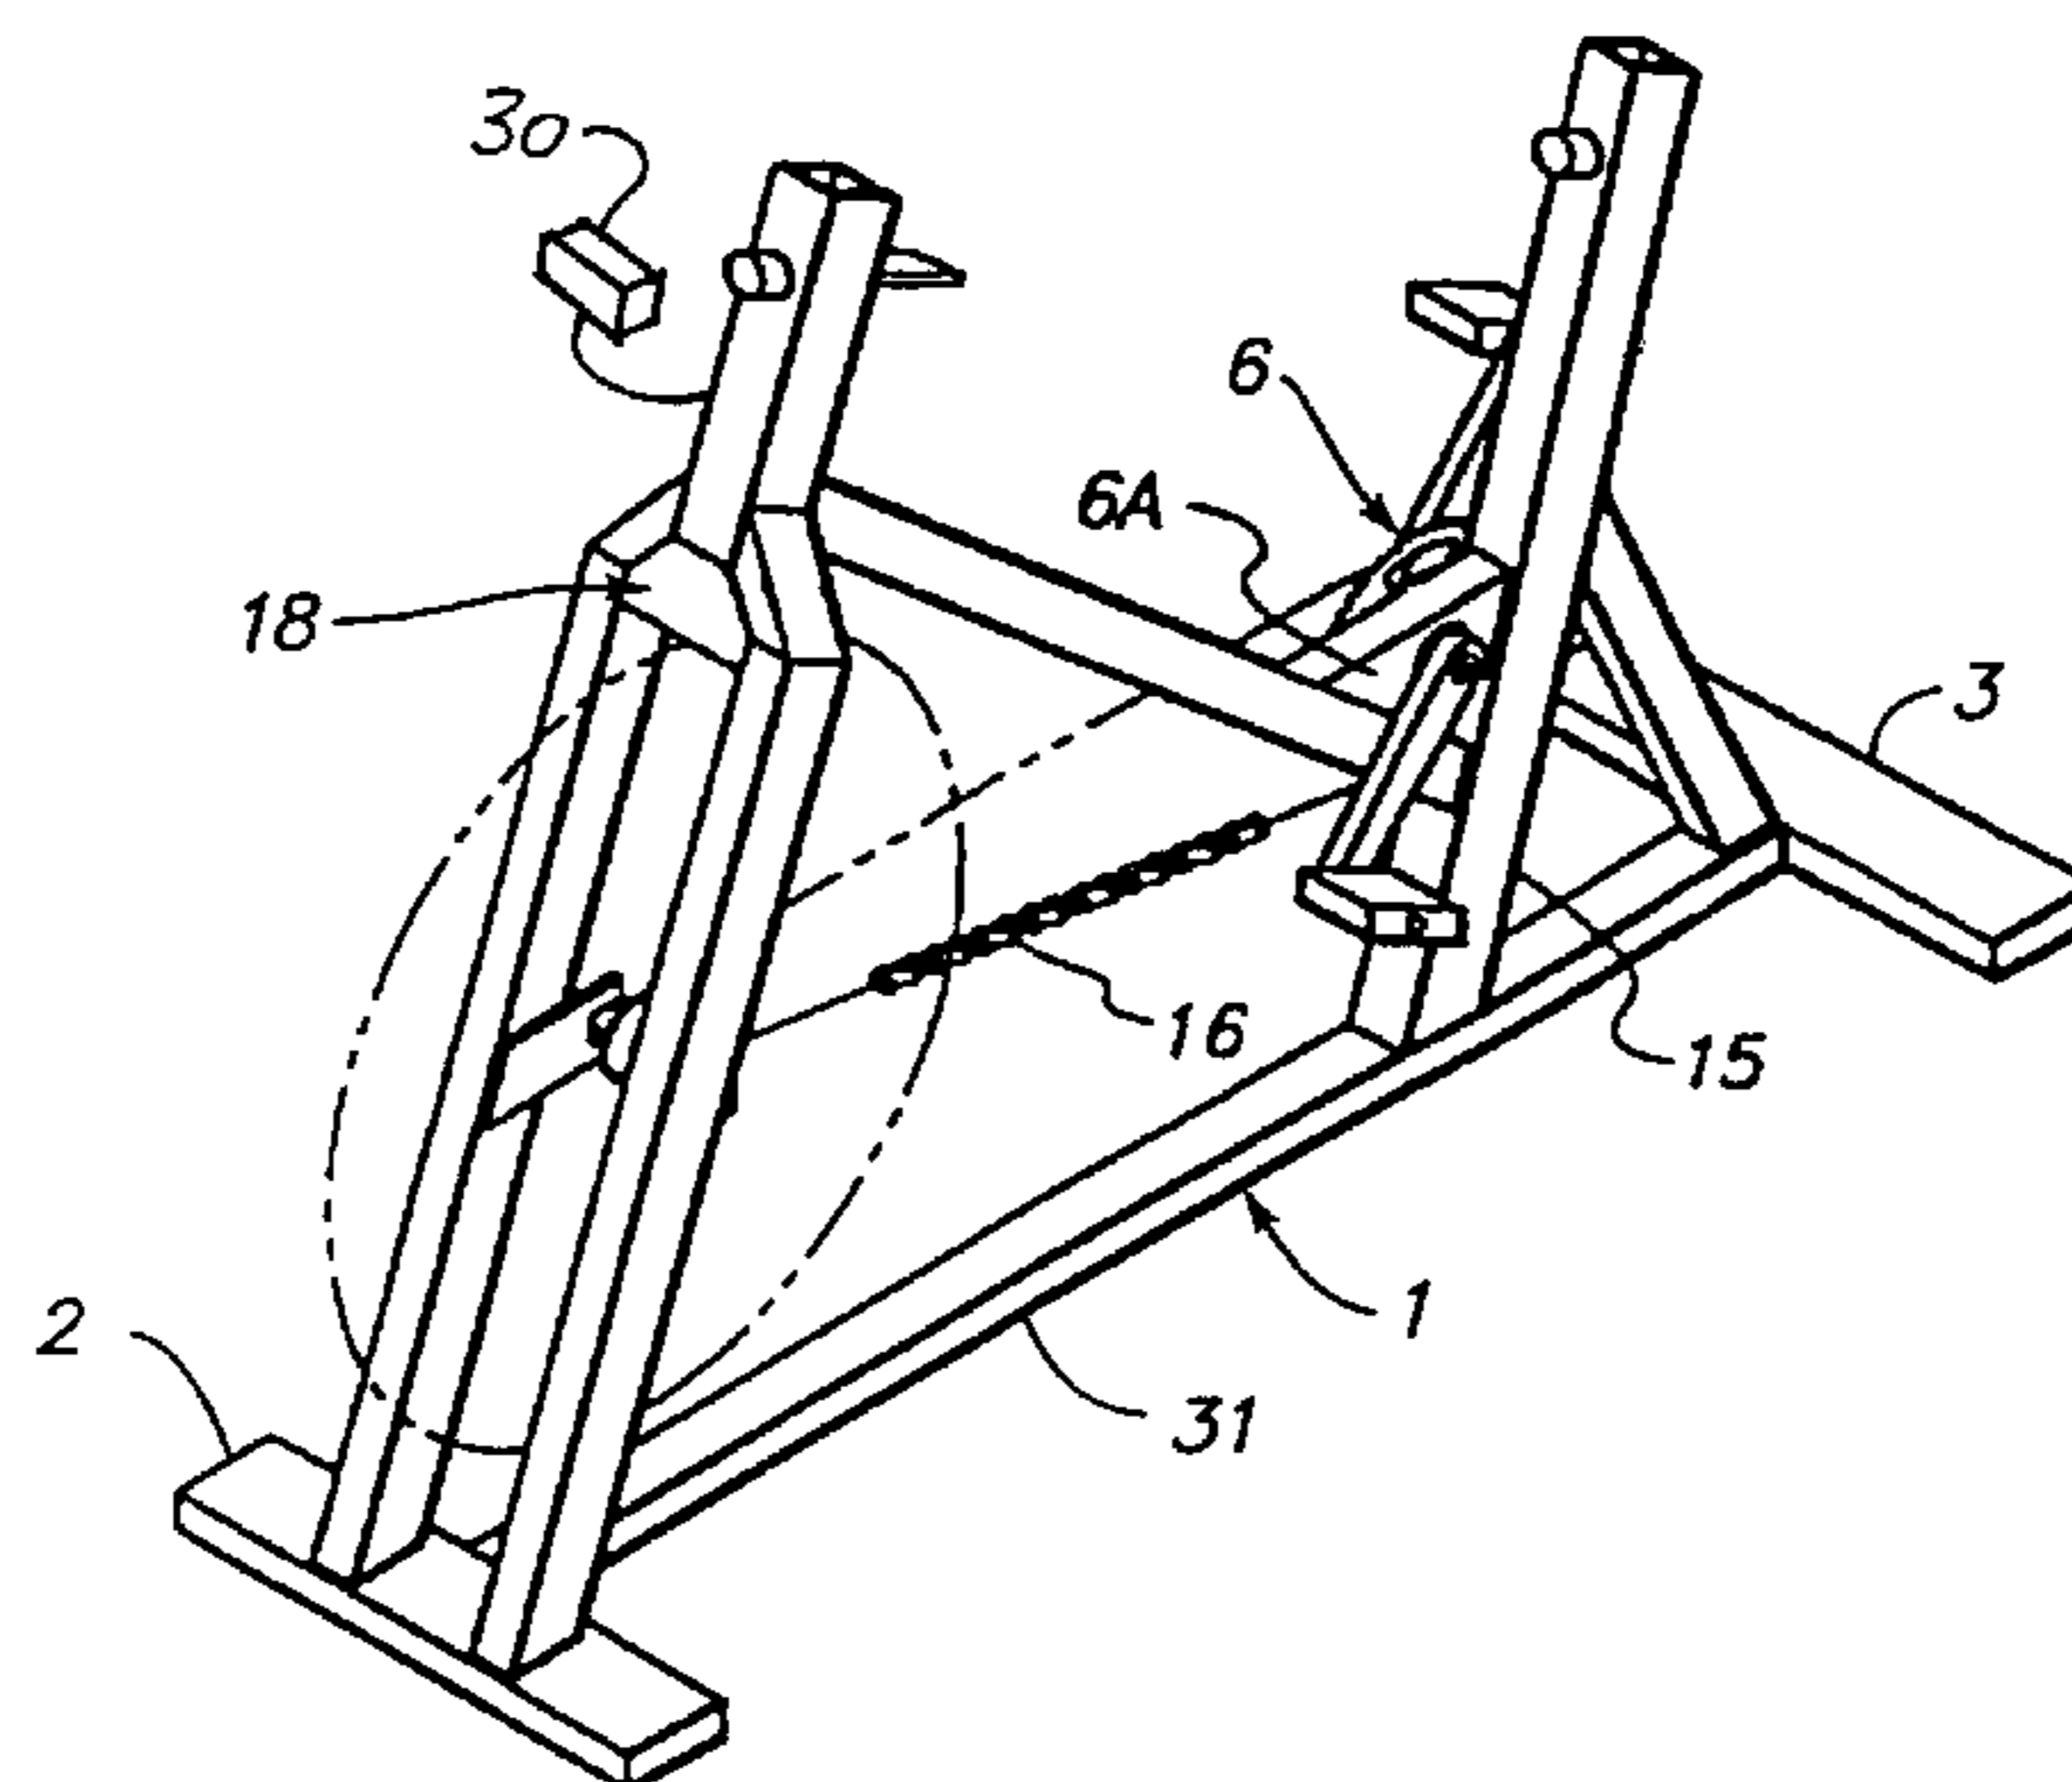

US 7,455,627 B2

Page 2

U.S. PATENT DOCUMENTS

4,824,102 A	4/1989	Lo	5,232,422 A	8/1993	Bishop, Jr.	
4,880,225 A	11/1989	Lucas et al.	5,336,147 A	8/1994	Sweeney, III	
4,902,001 A	2/1990	Balbo	5,423,728 A	6/1995	Goldberg	
4,915,374 A	4/1990	Watkins	5,722,916 A *	3/1998	Goldberg	482/57
4,936,570 A	6/1990	Szymiski et al.	6,155,958 A *	12/2000	Goldberg	482/57
5,000,469 A	3/1991	Smith	6,468,185 B1 *	10/2002	Goldberg	482/57
5,145,477 A	9/1992	Han	6,793,608 B2	9/2004	Goldberg	
			6,881,178 B1 *	4/2005	Goldberg	482/57

* cited by examiner

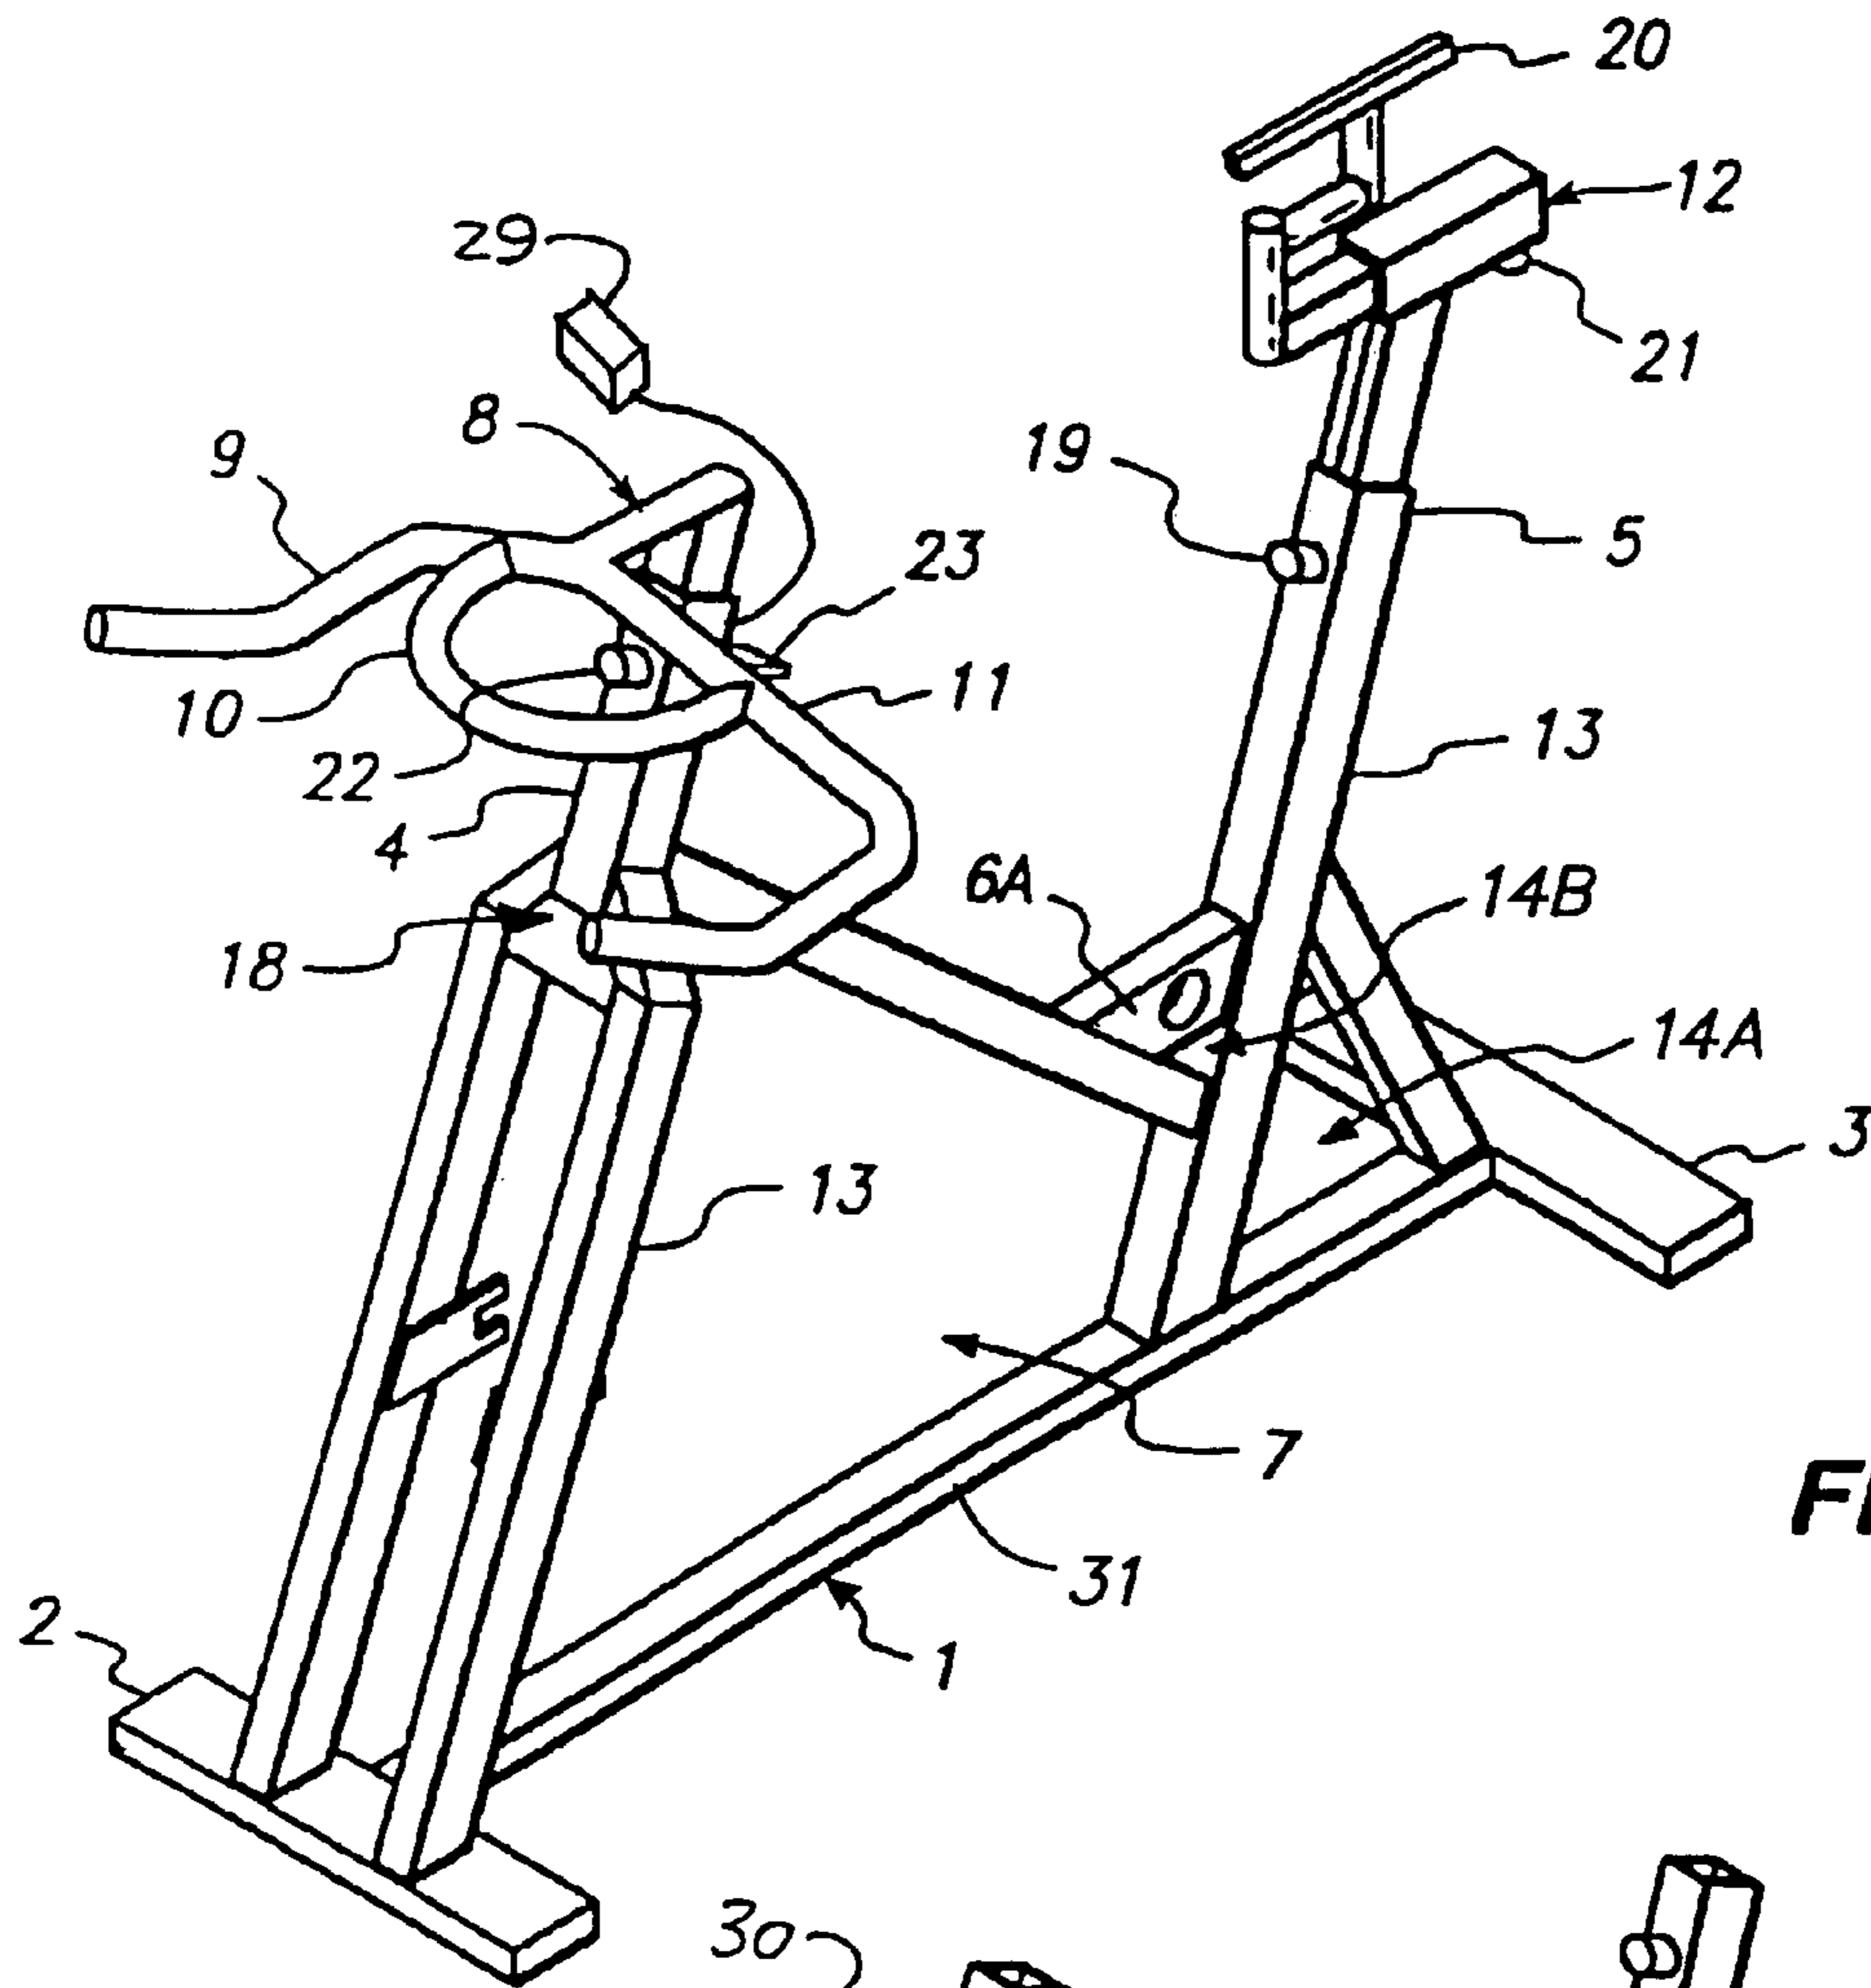


FIG. 1

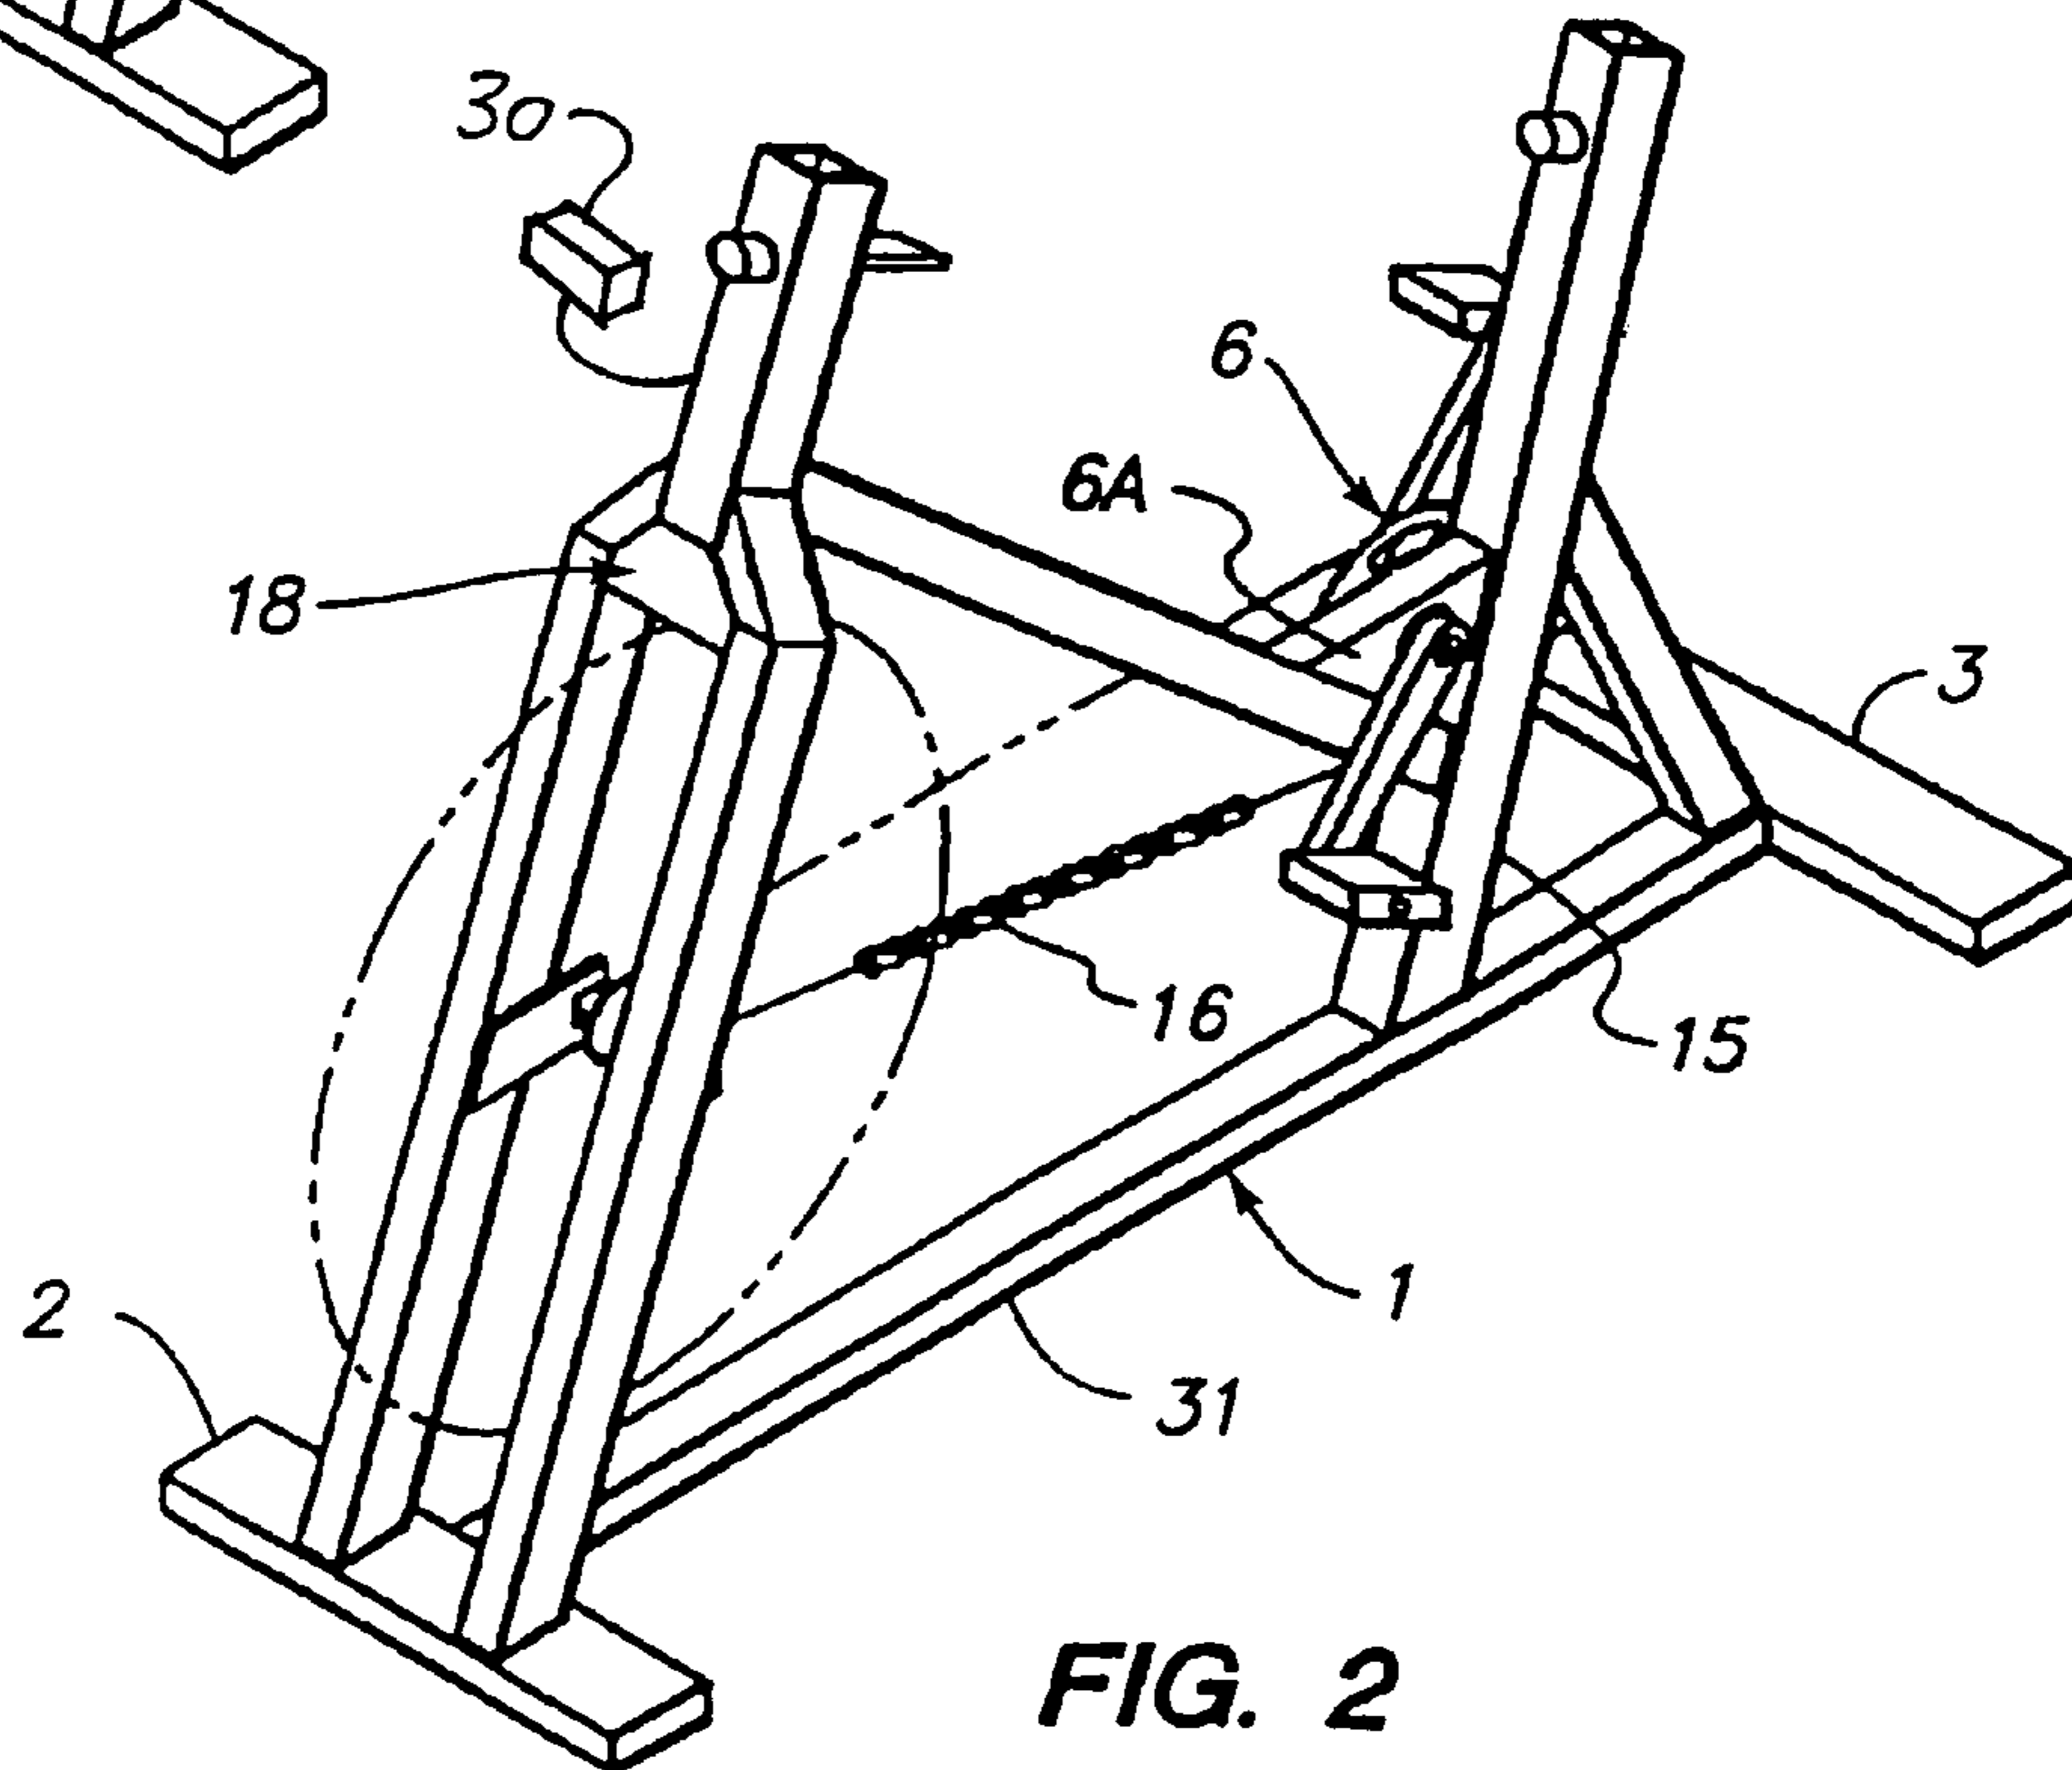


FIG. 2

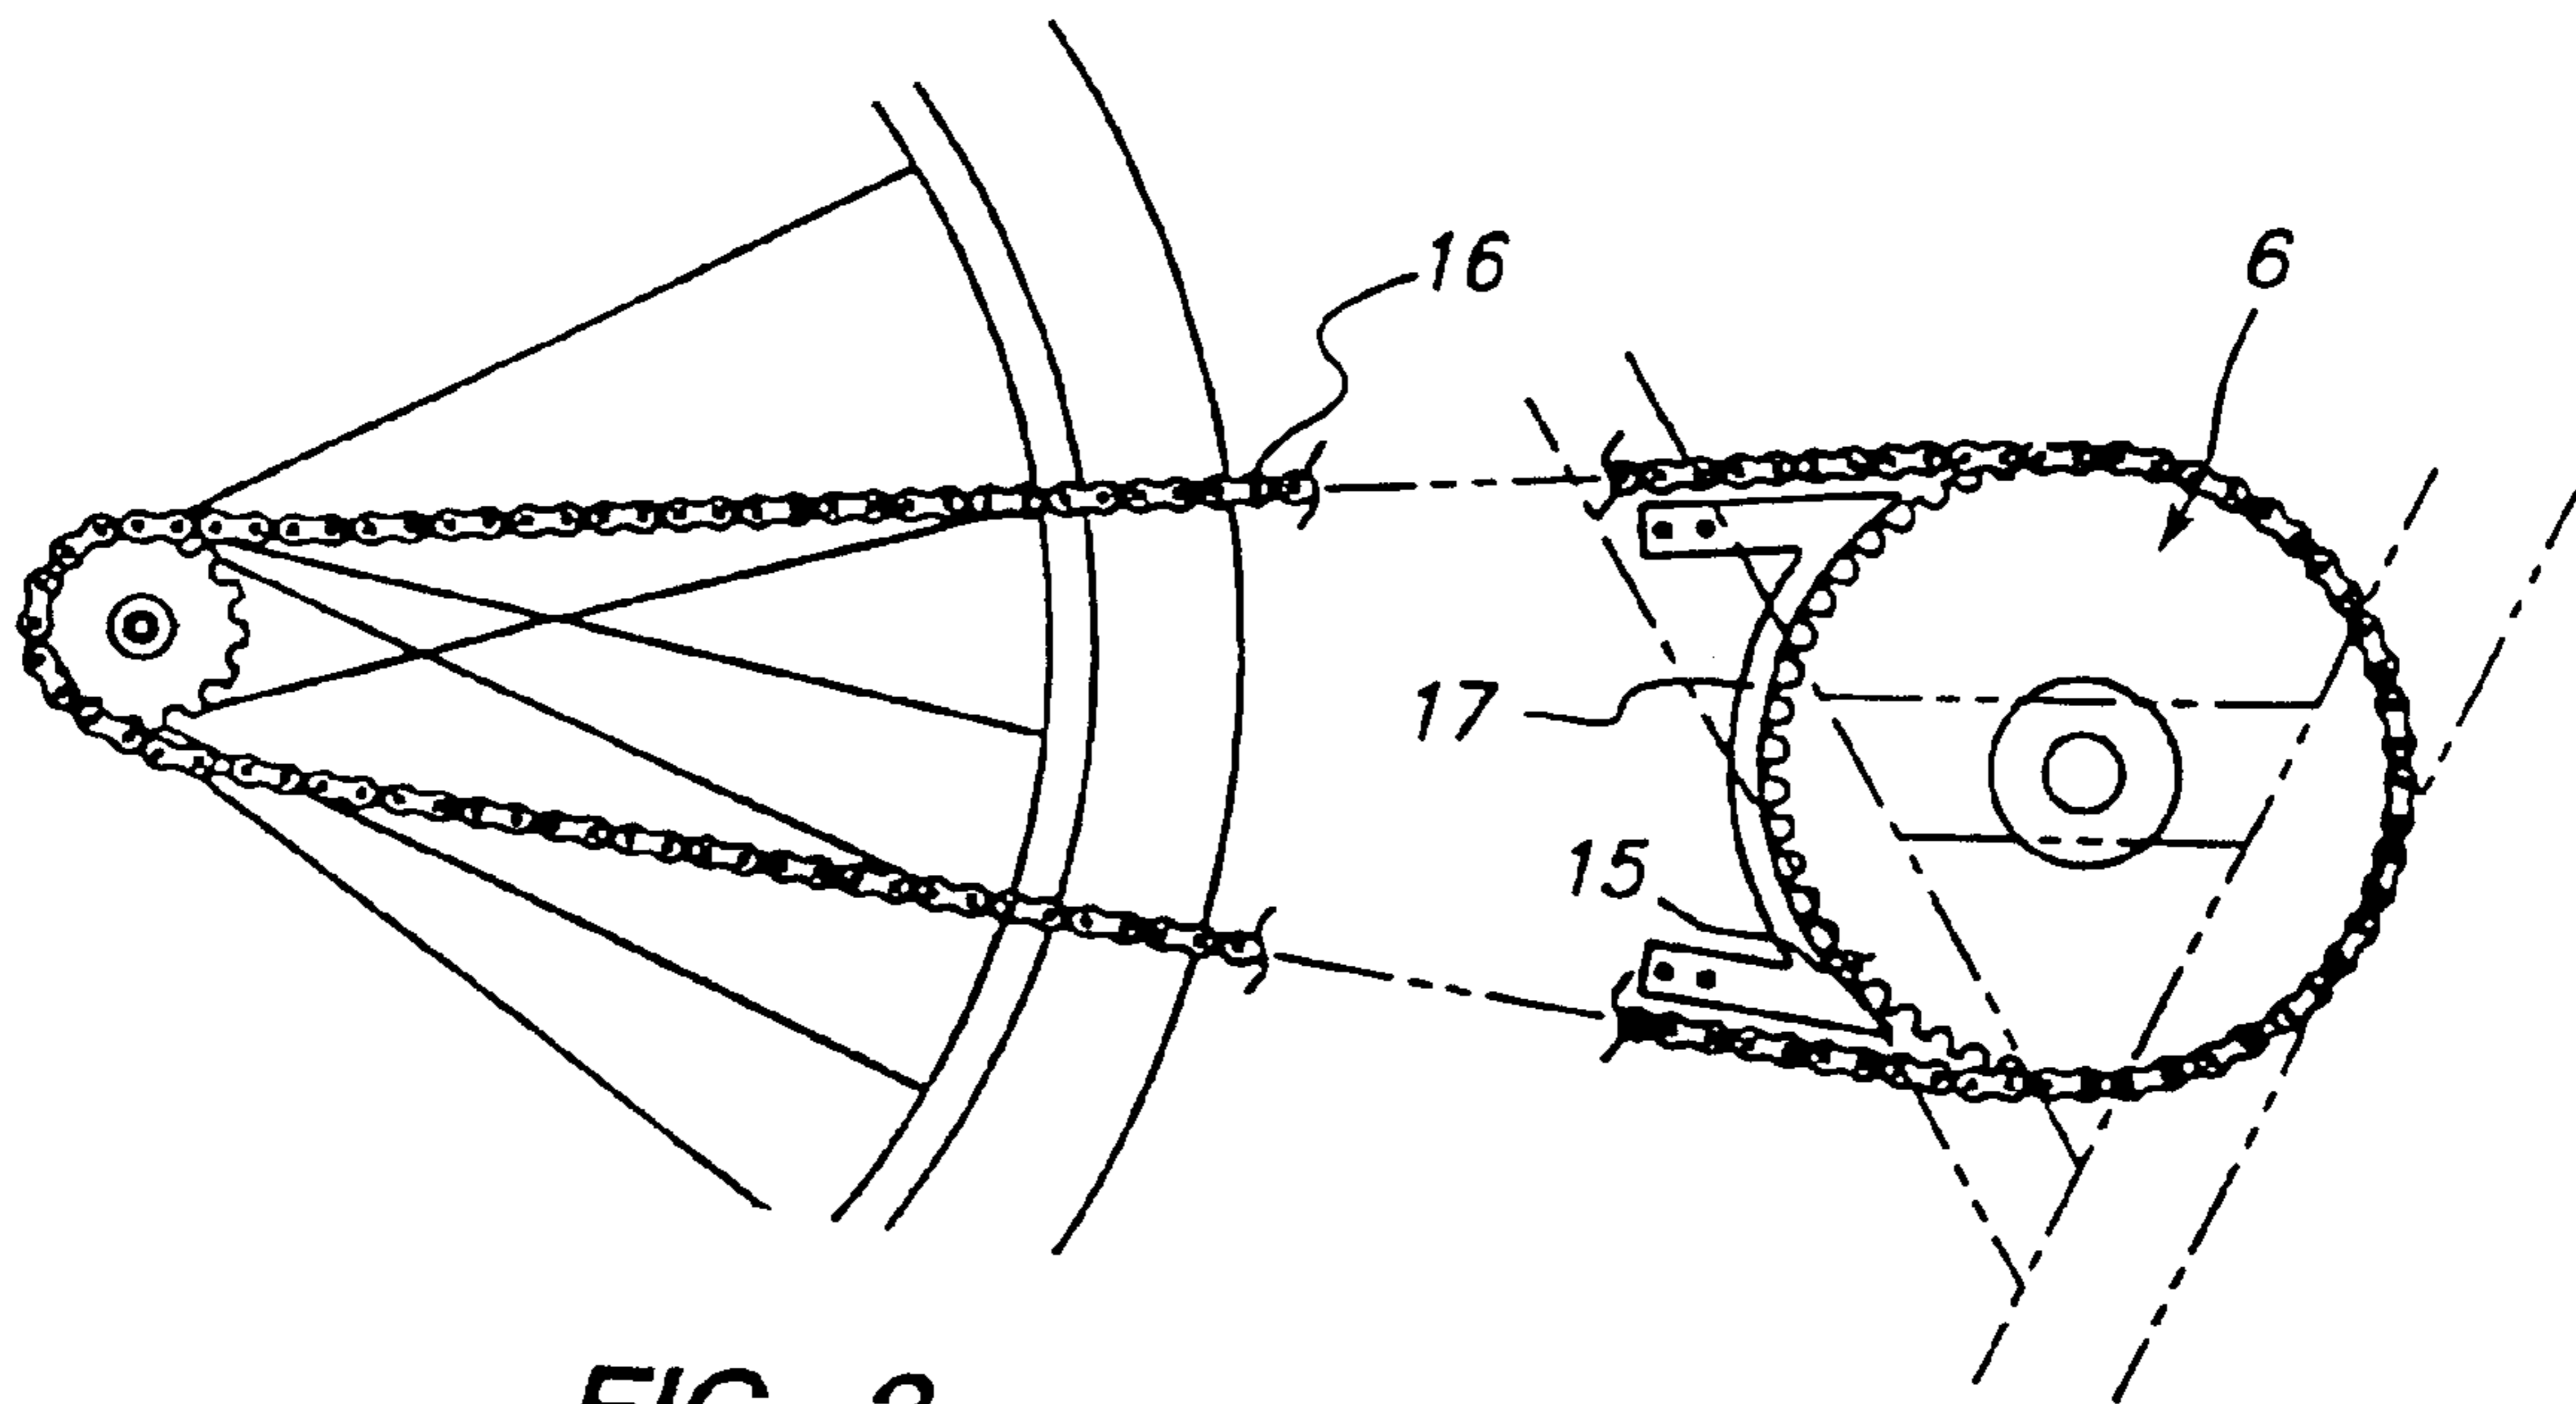


FIG. 3

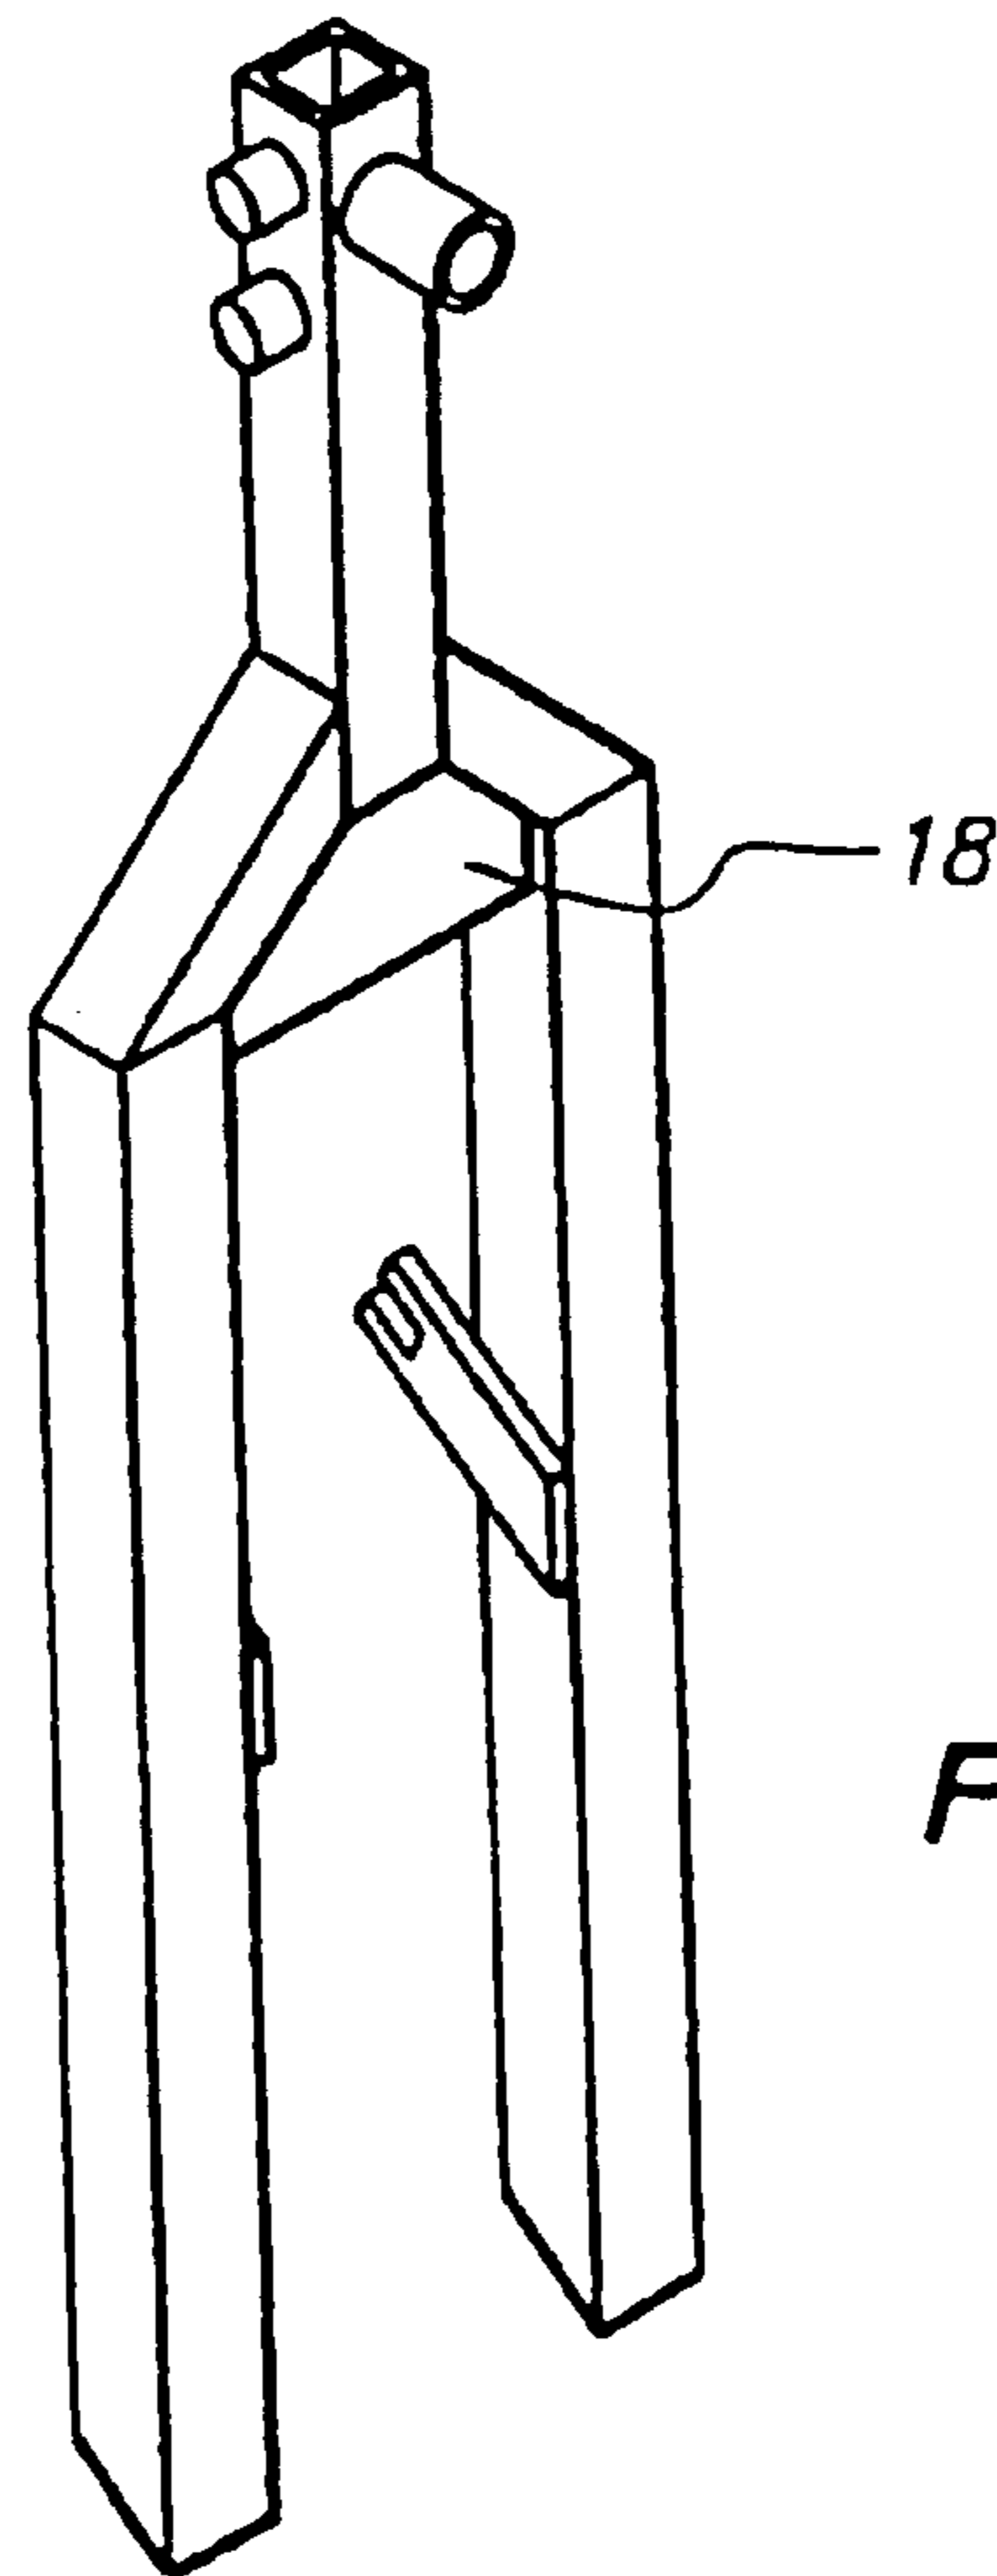


FIG. 4

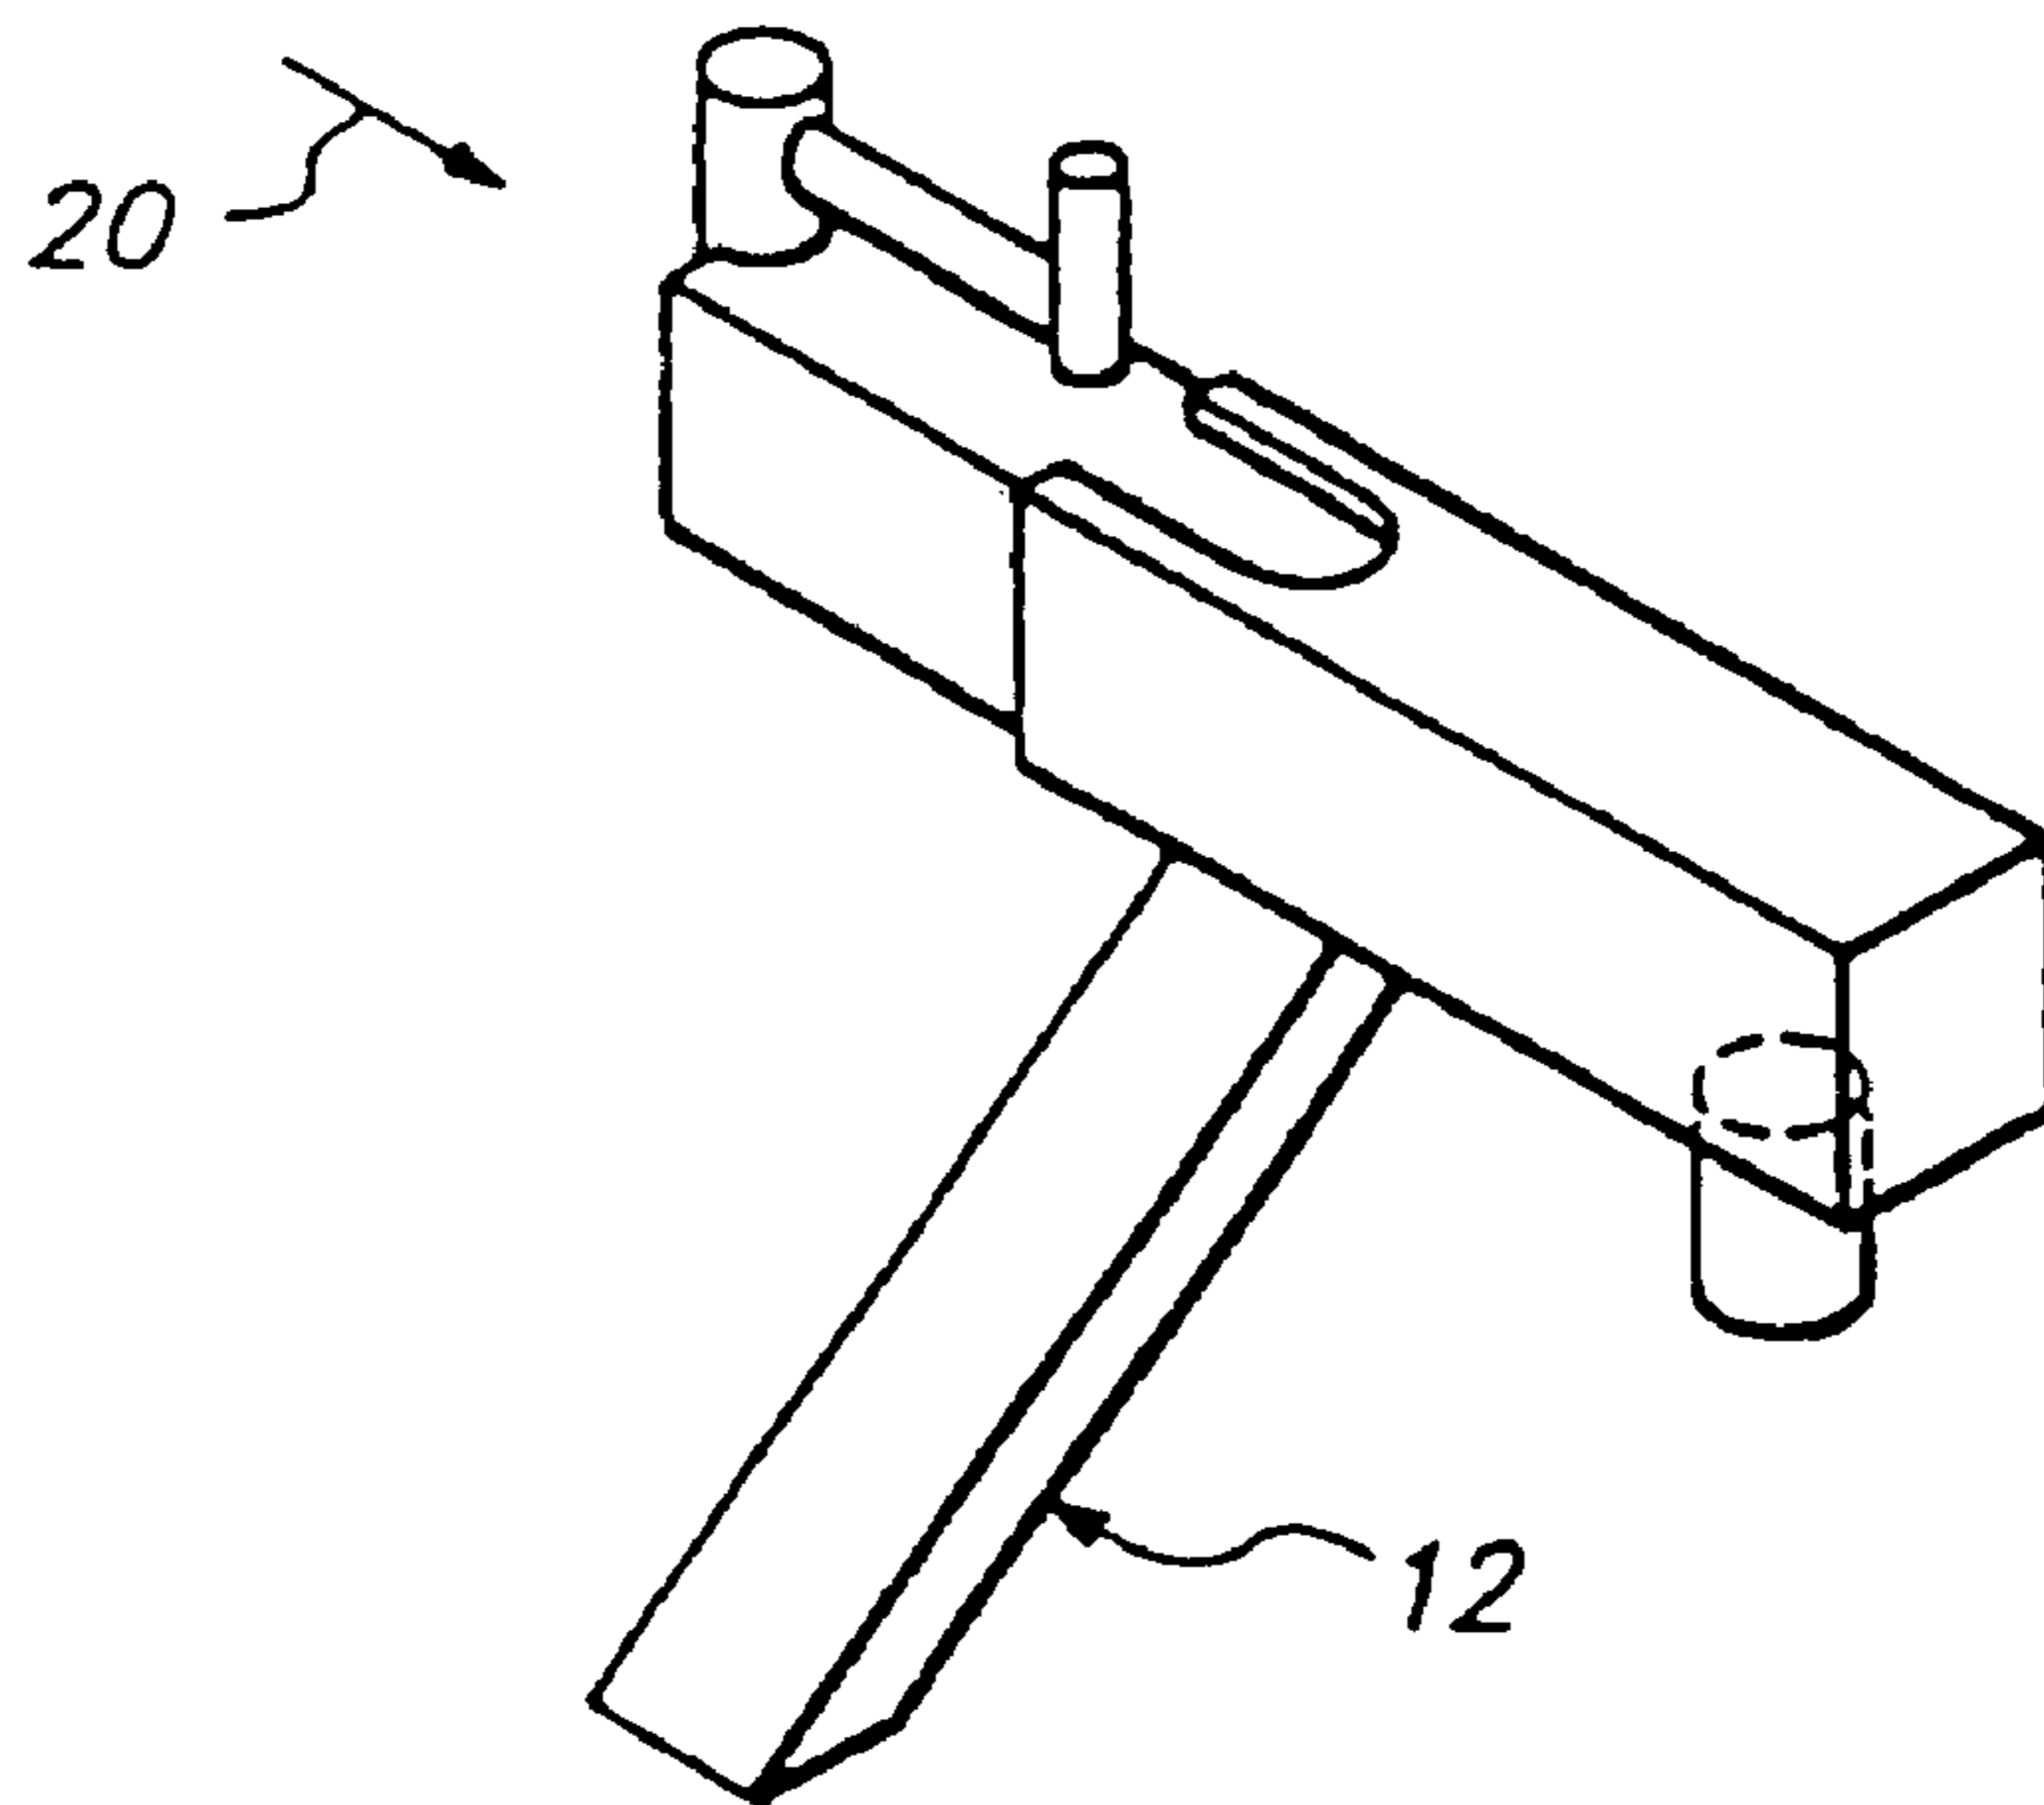


FIG. 5

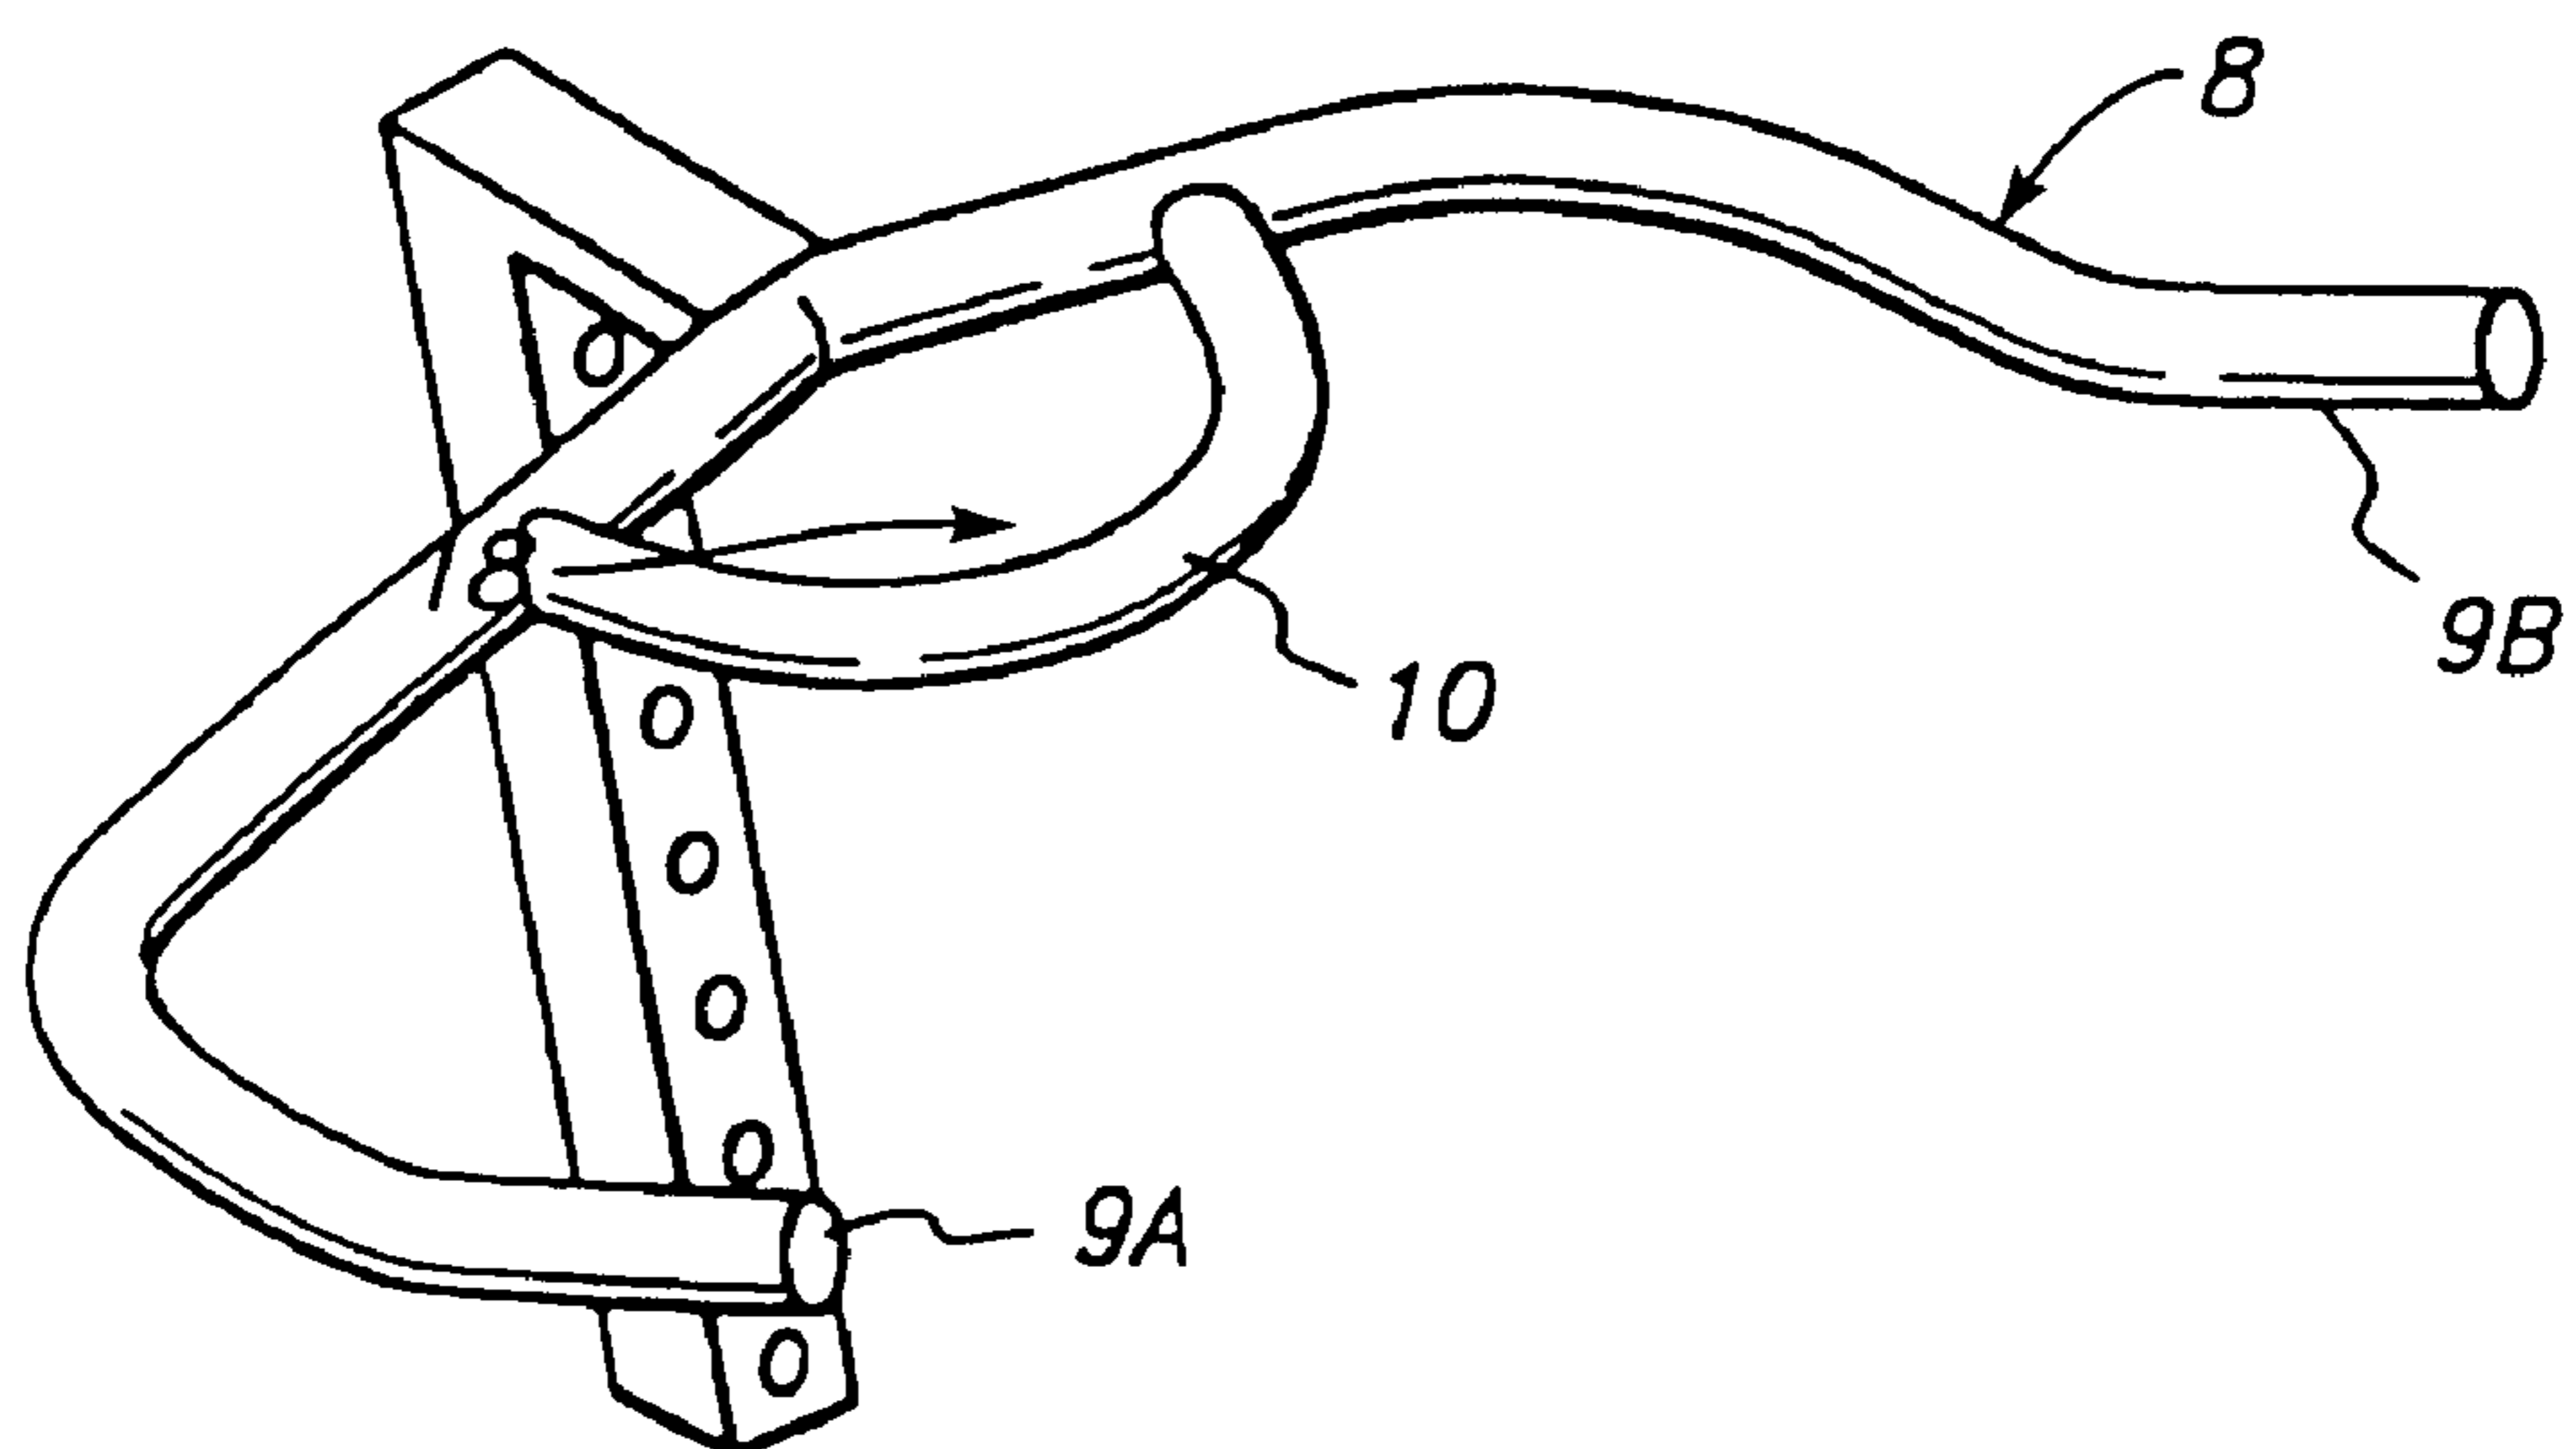


FIG. 6A

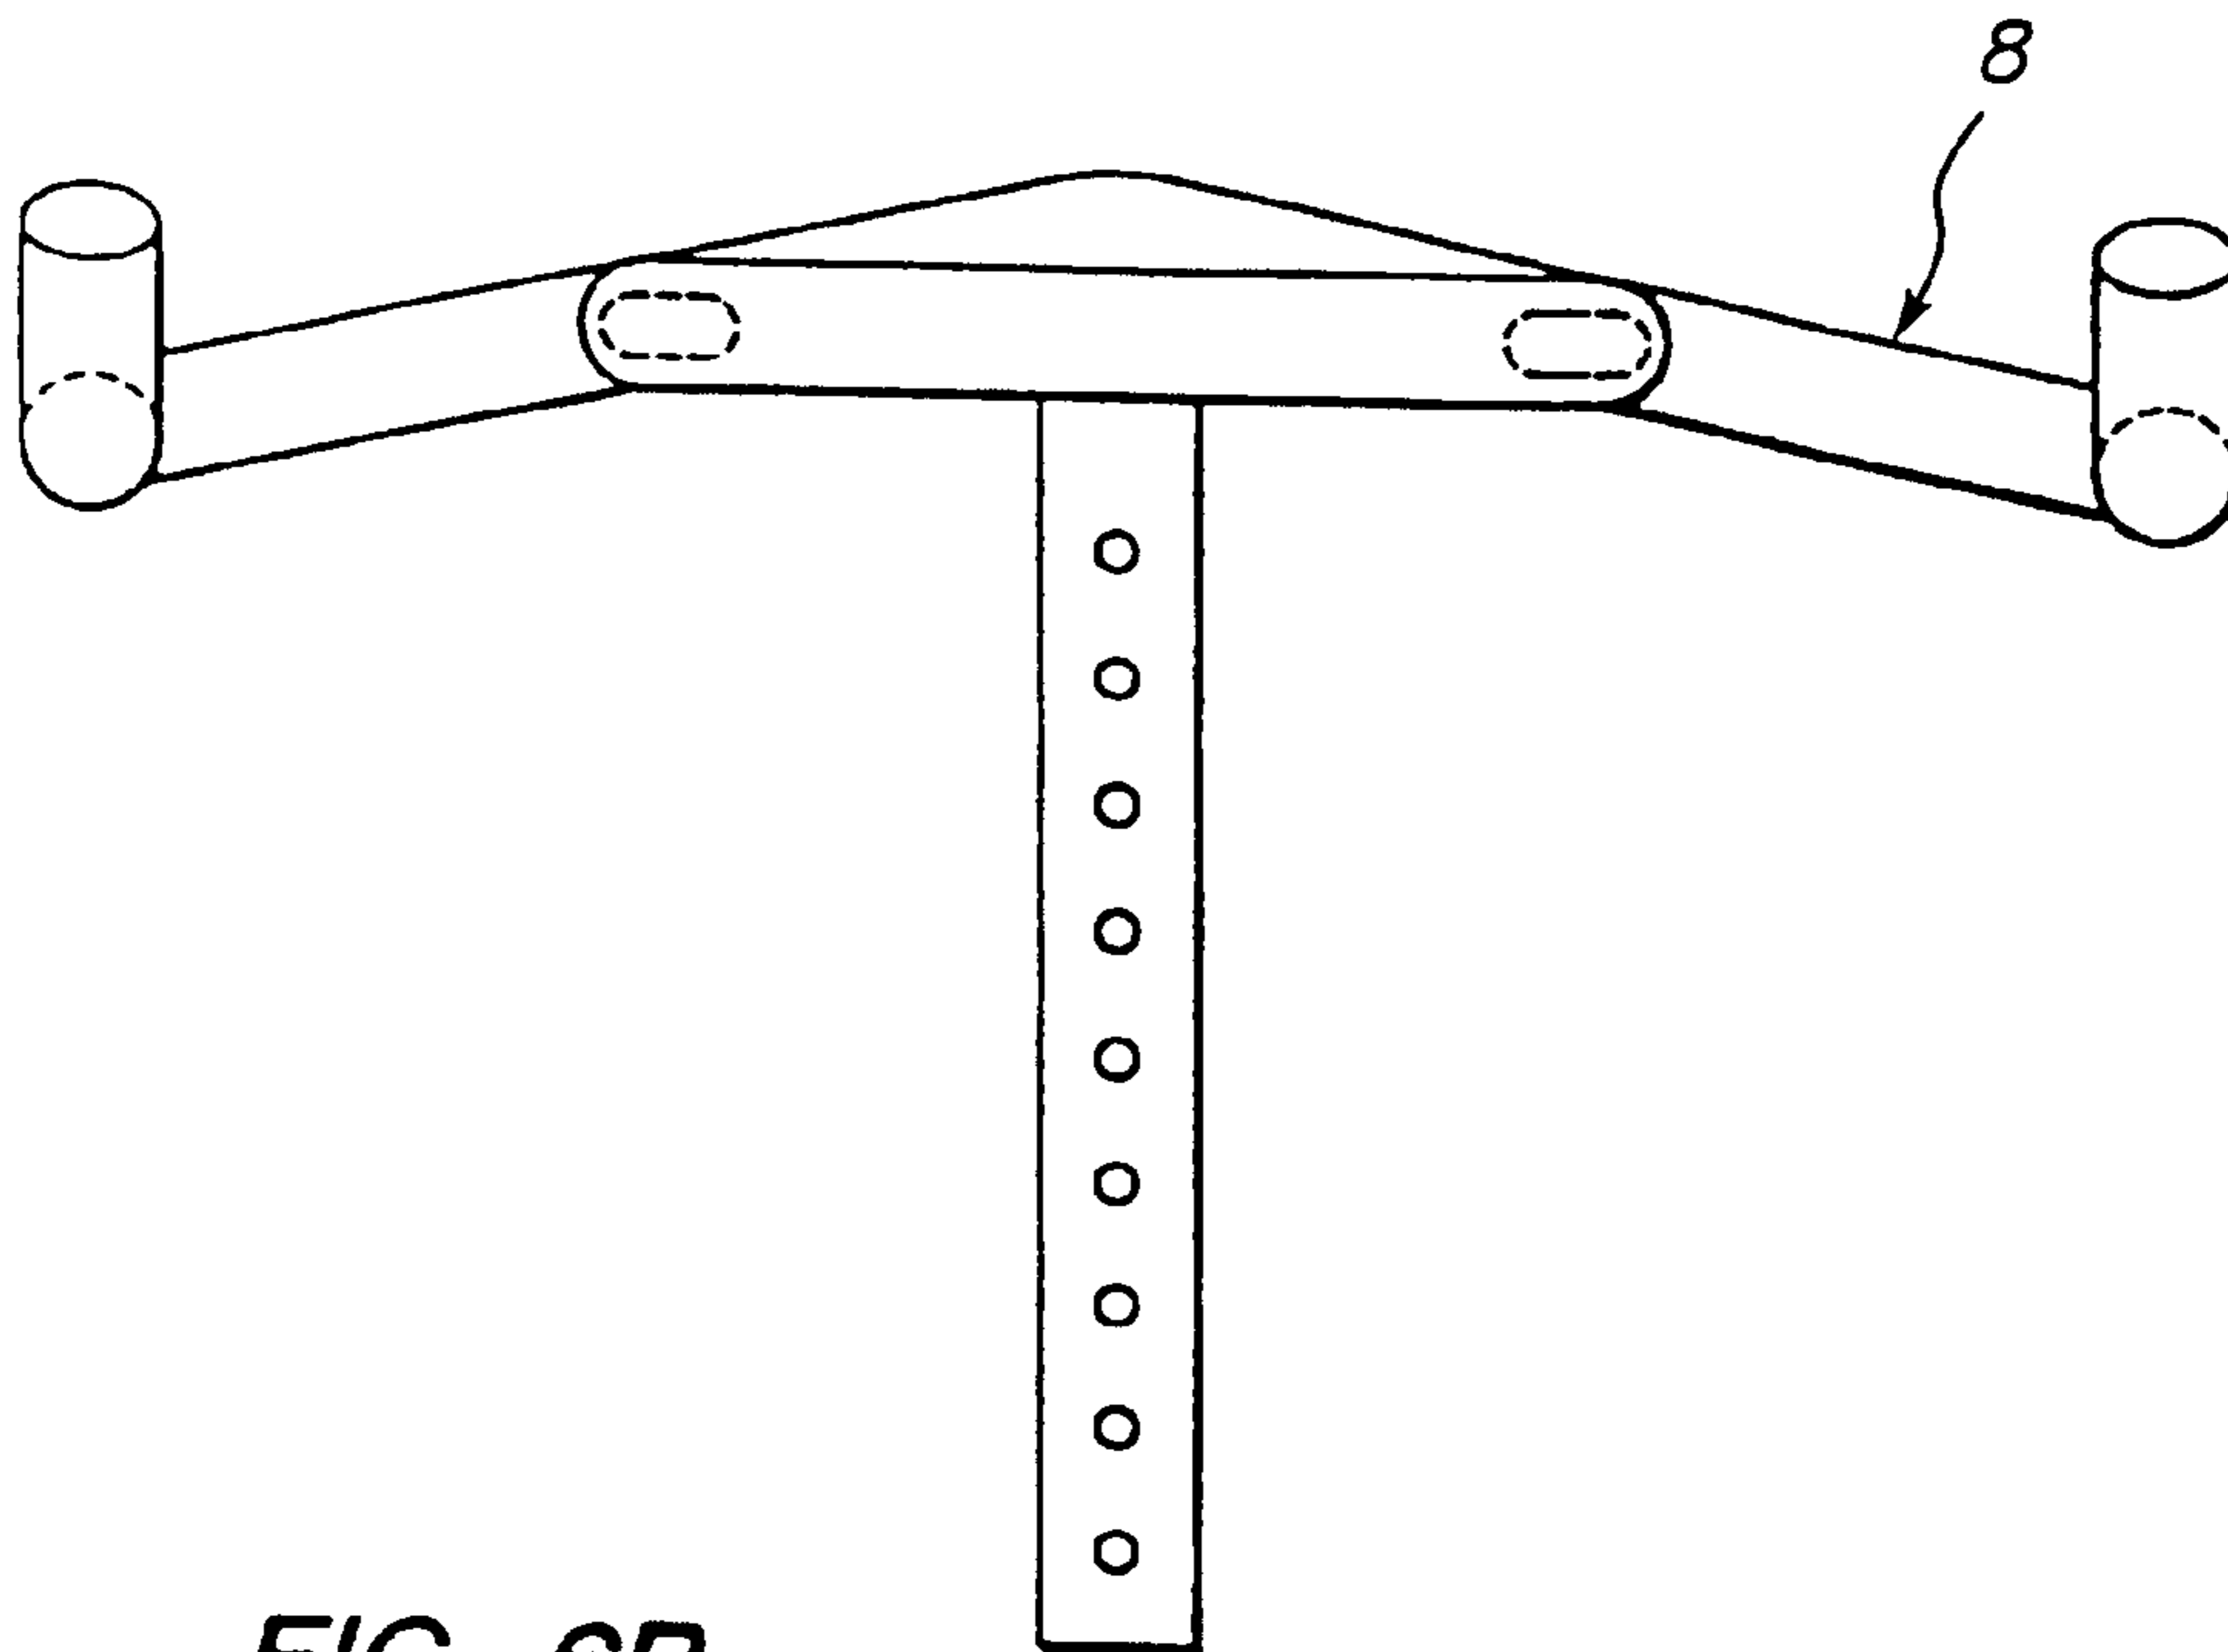


FIG. 6B

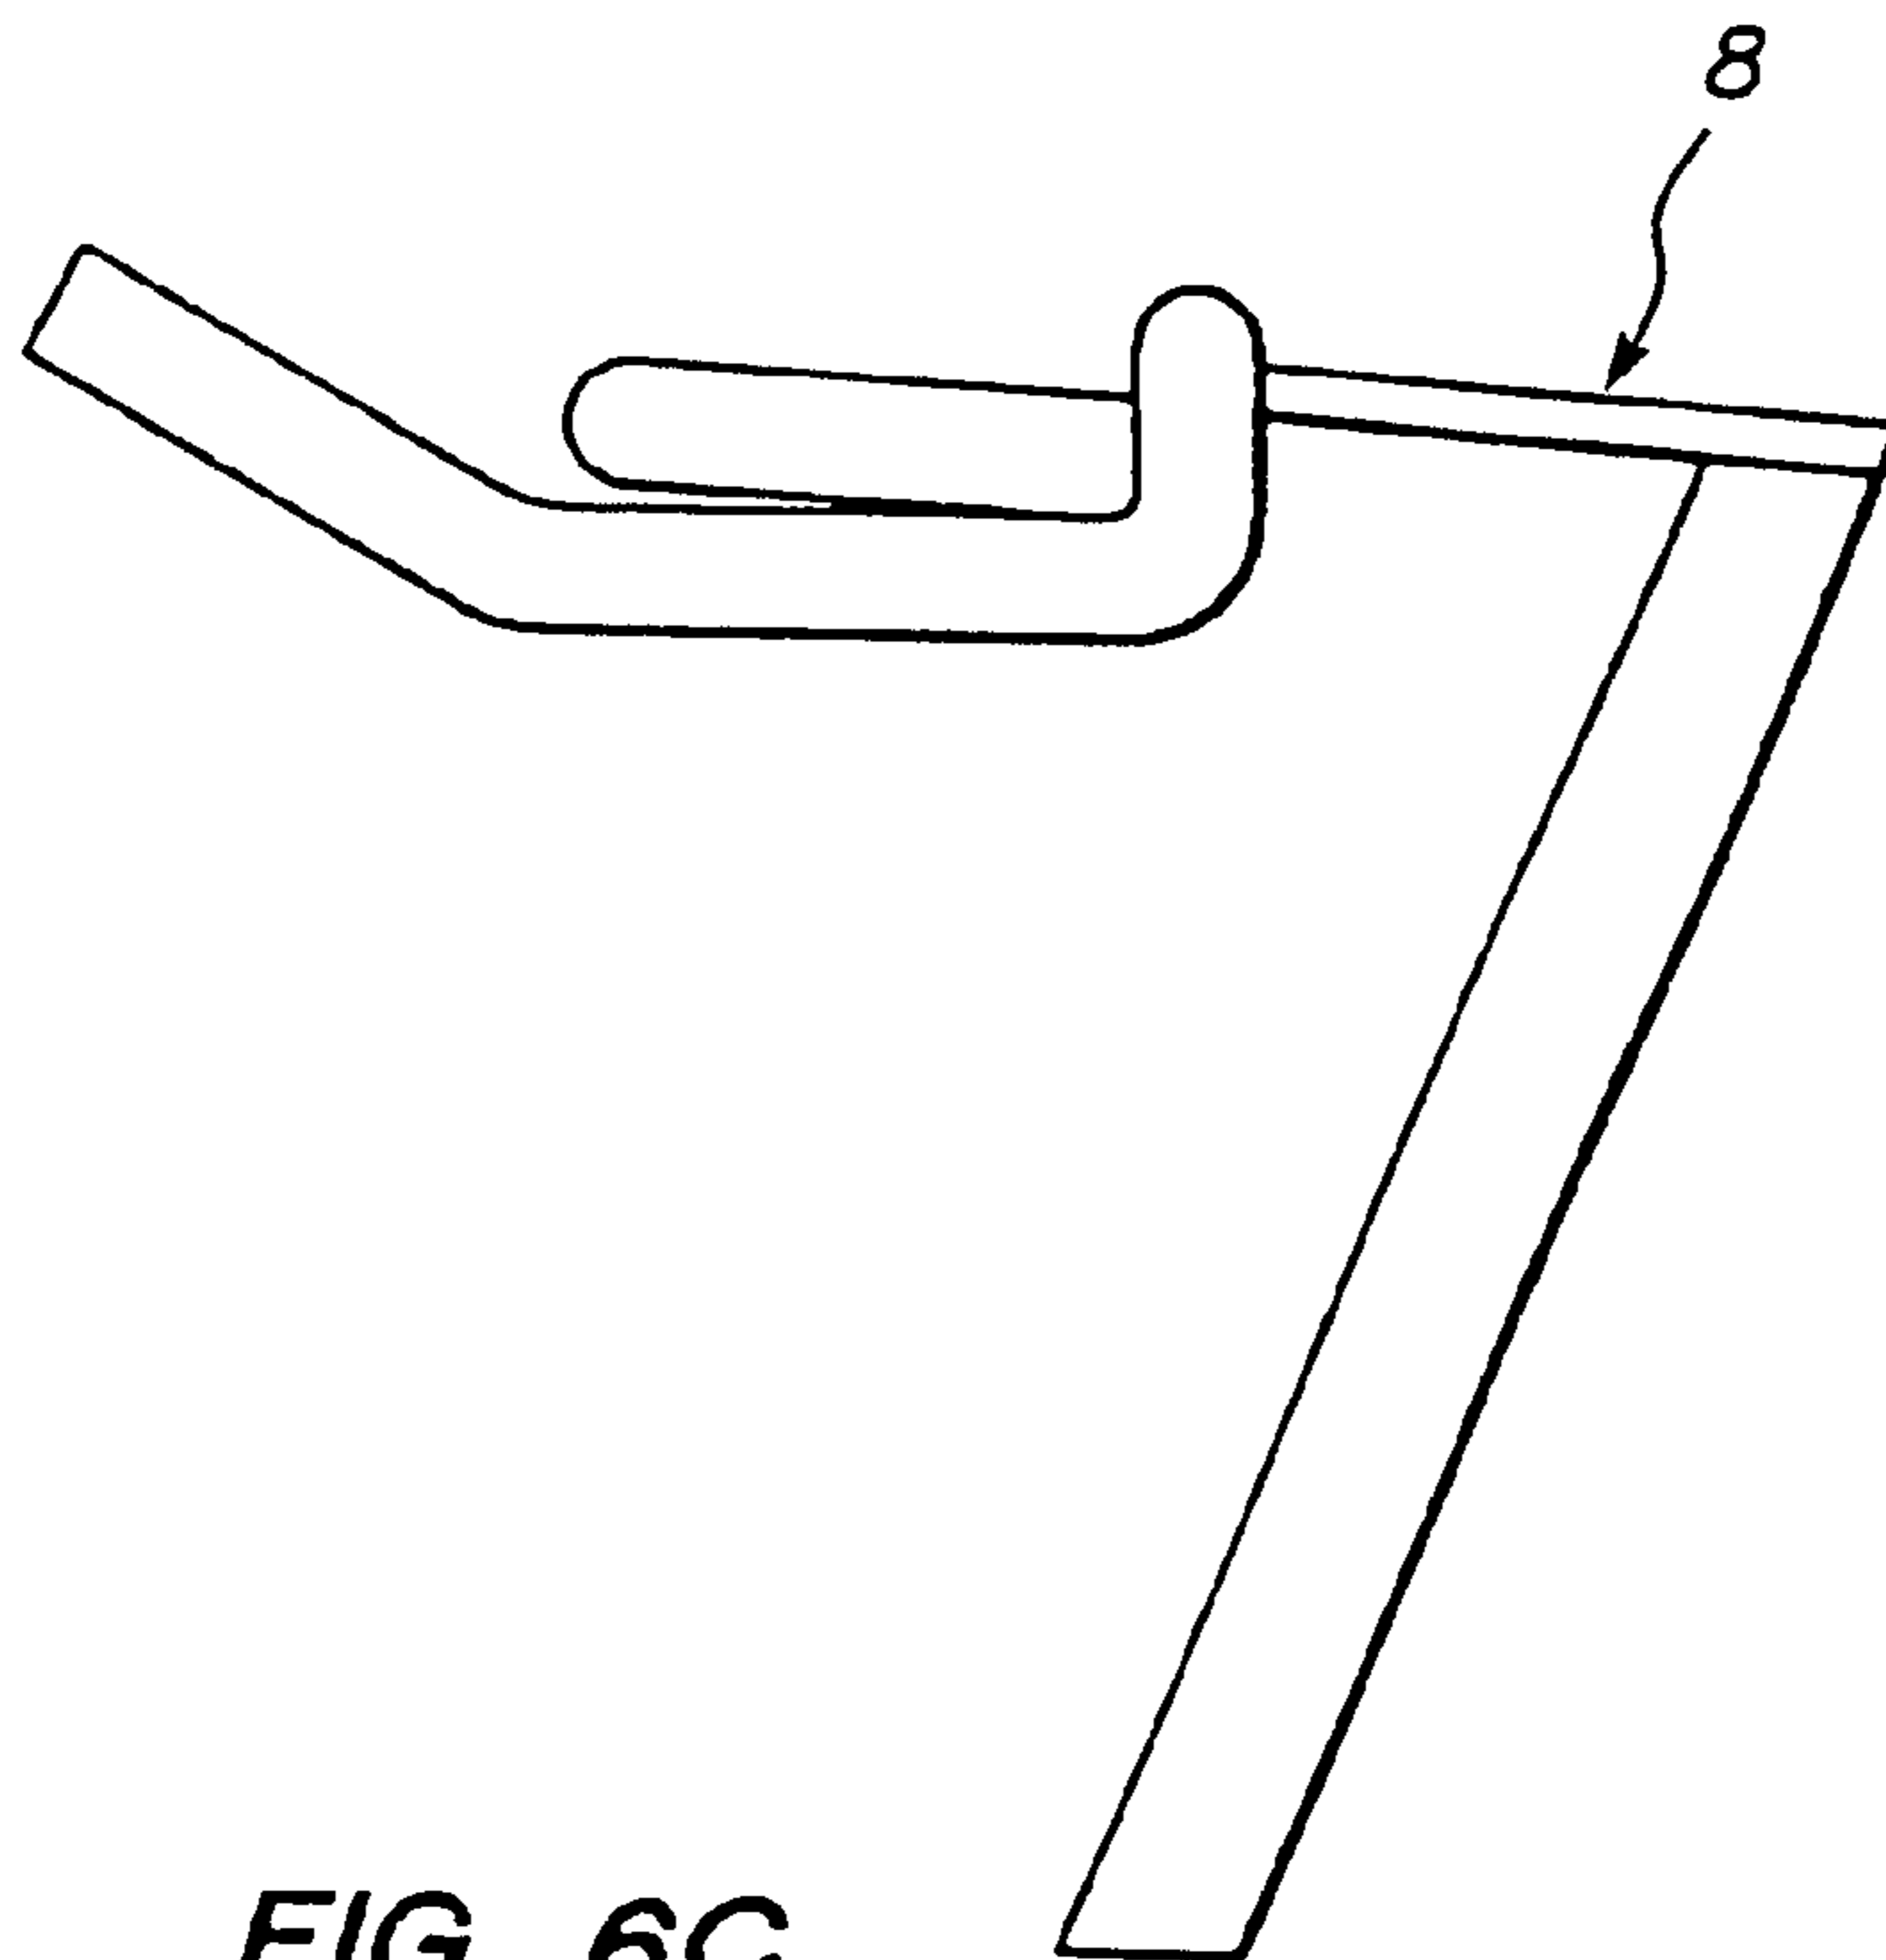


FIG. 6C

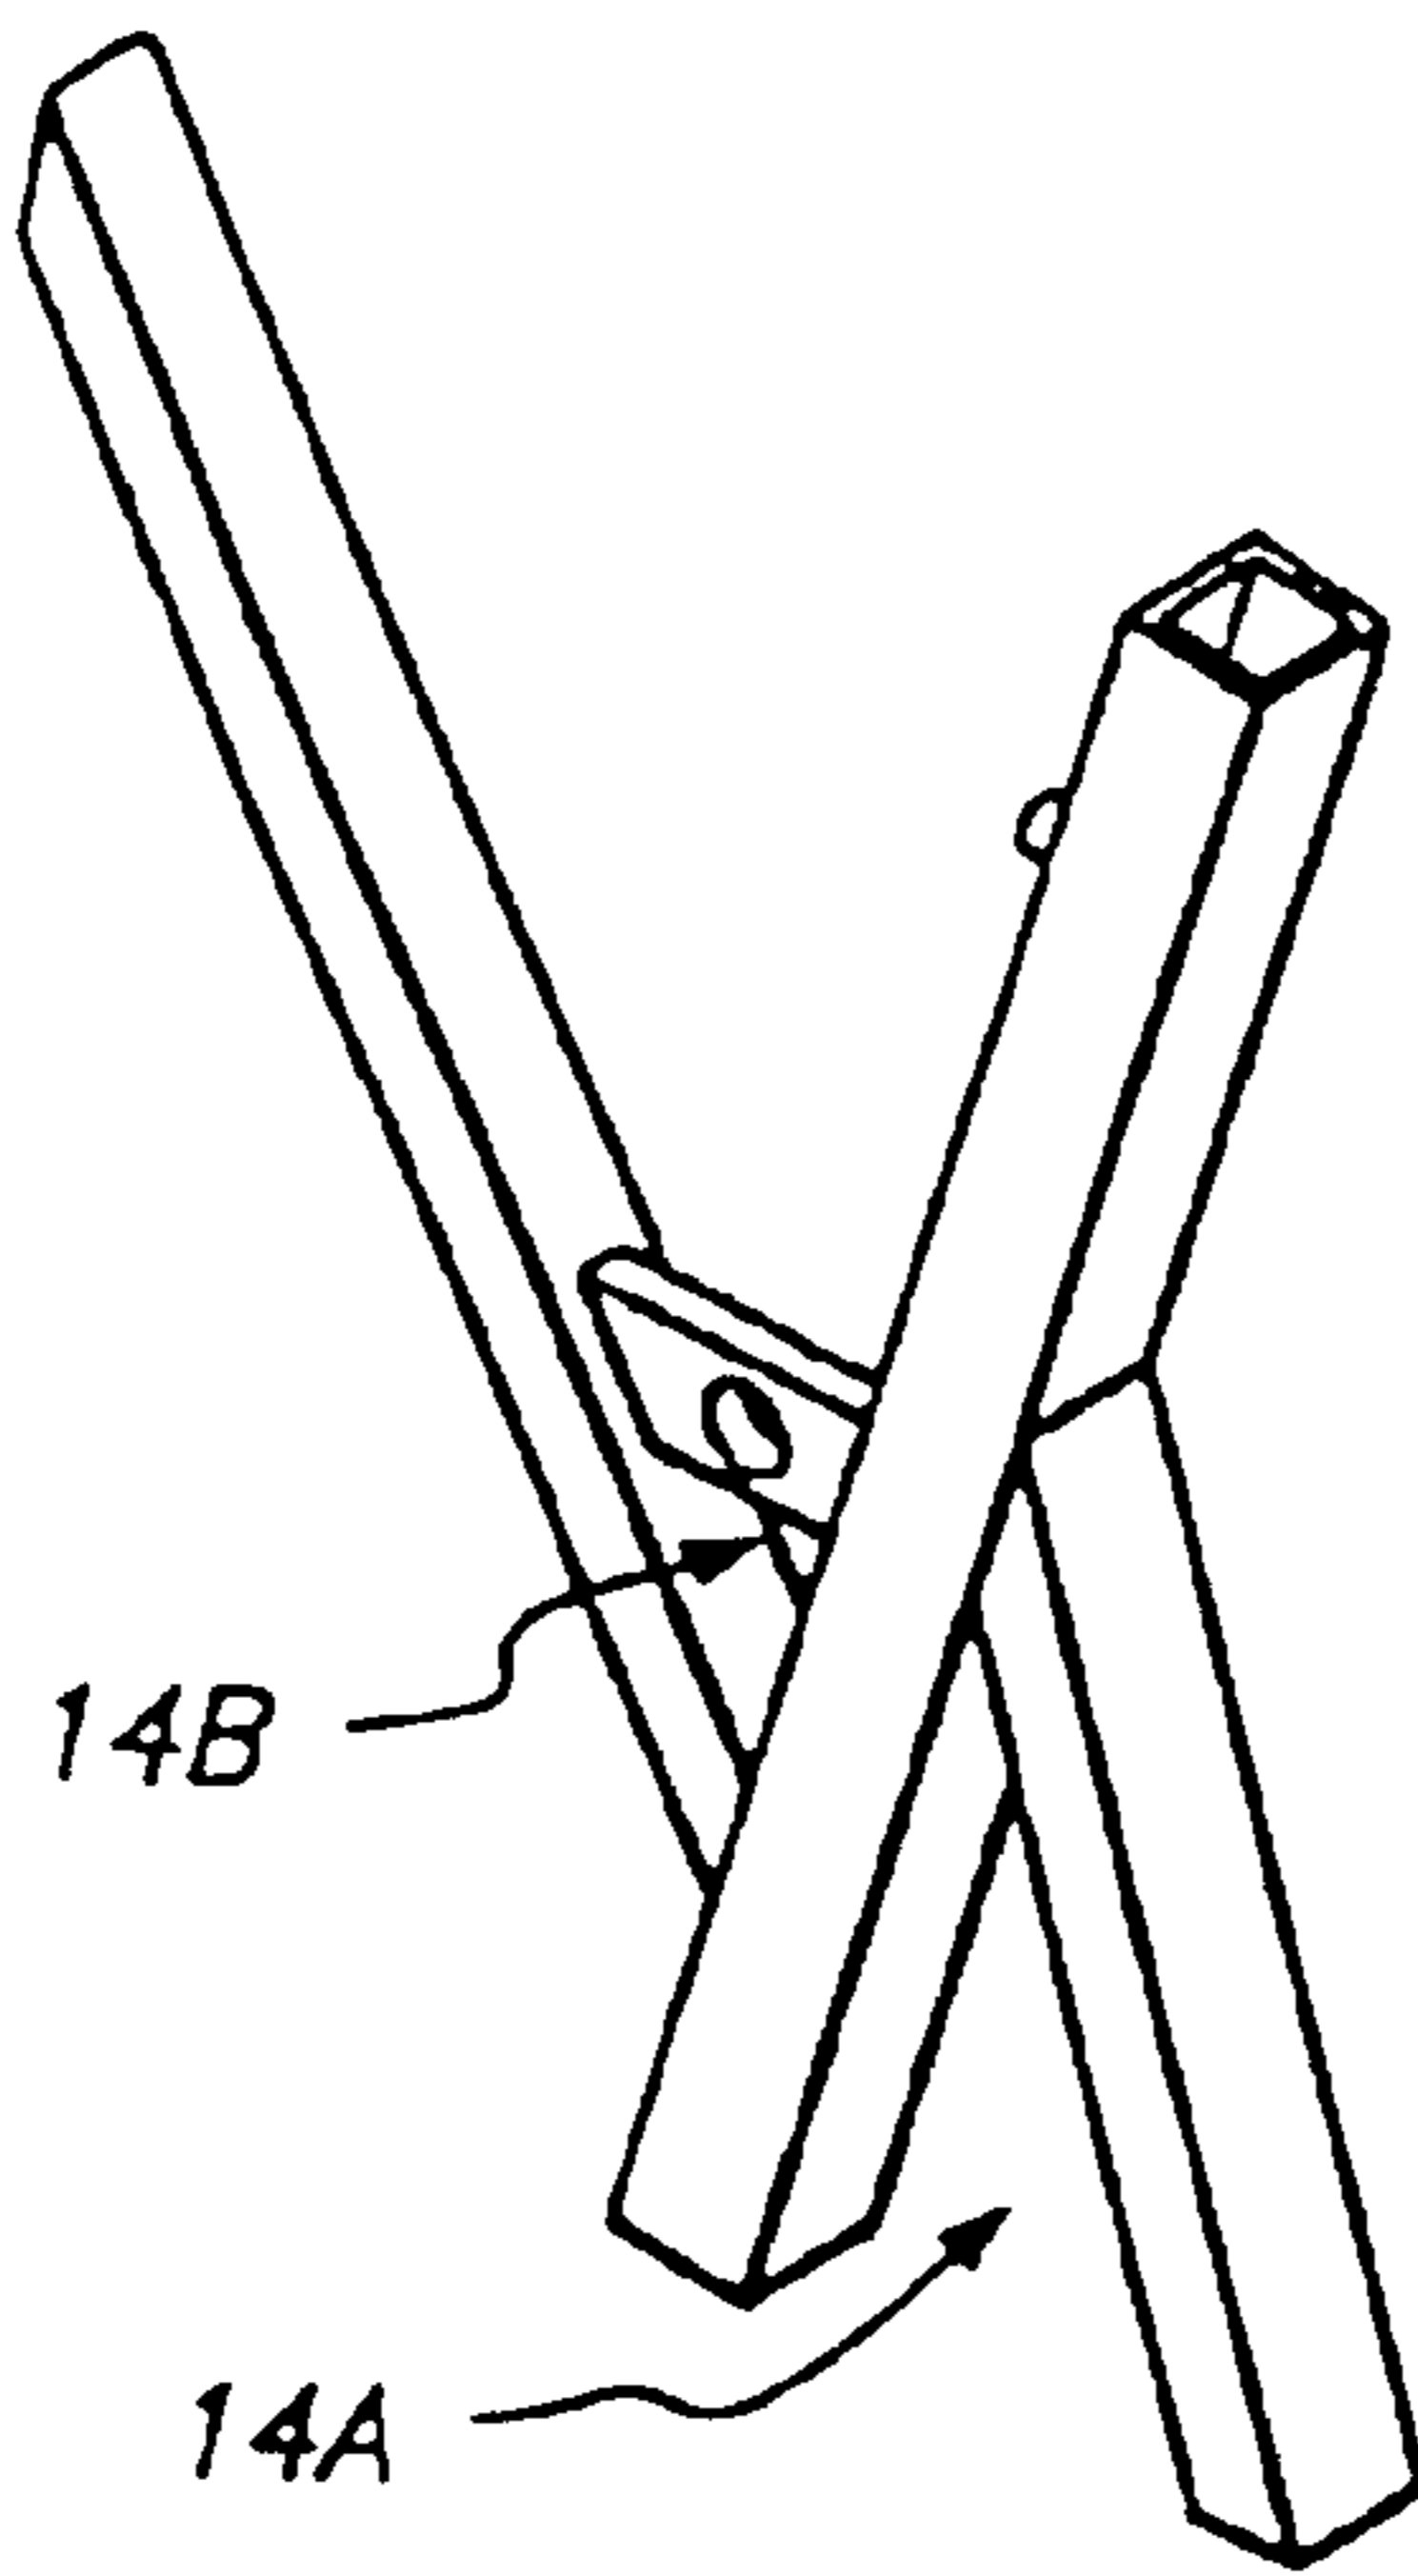


FIG. 7

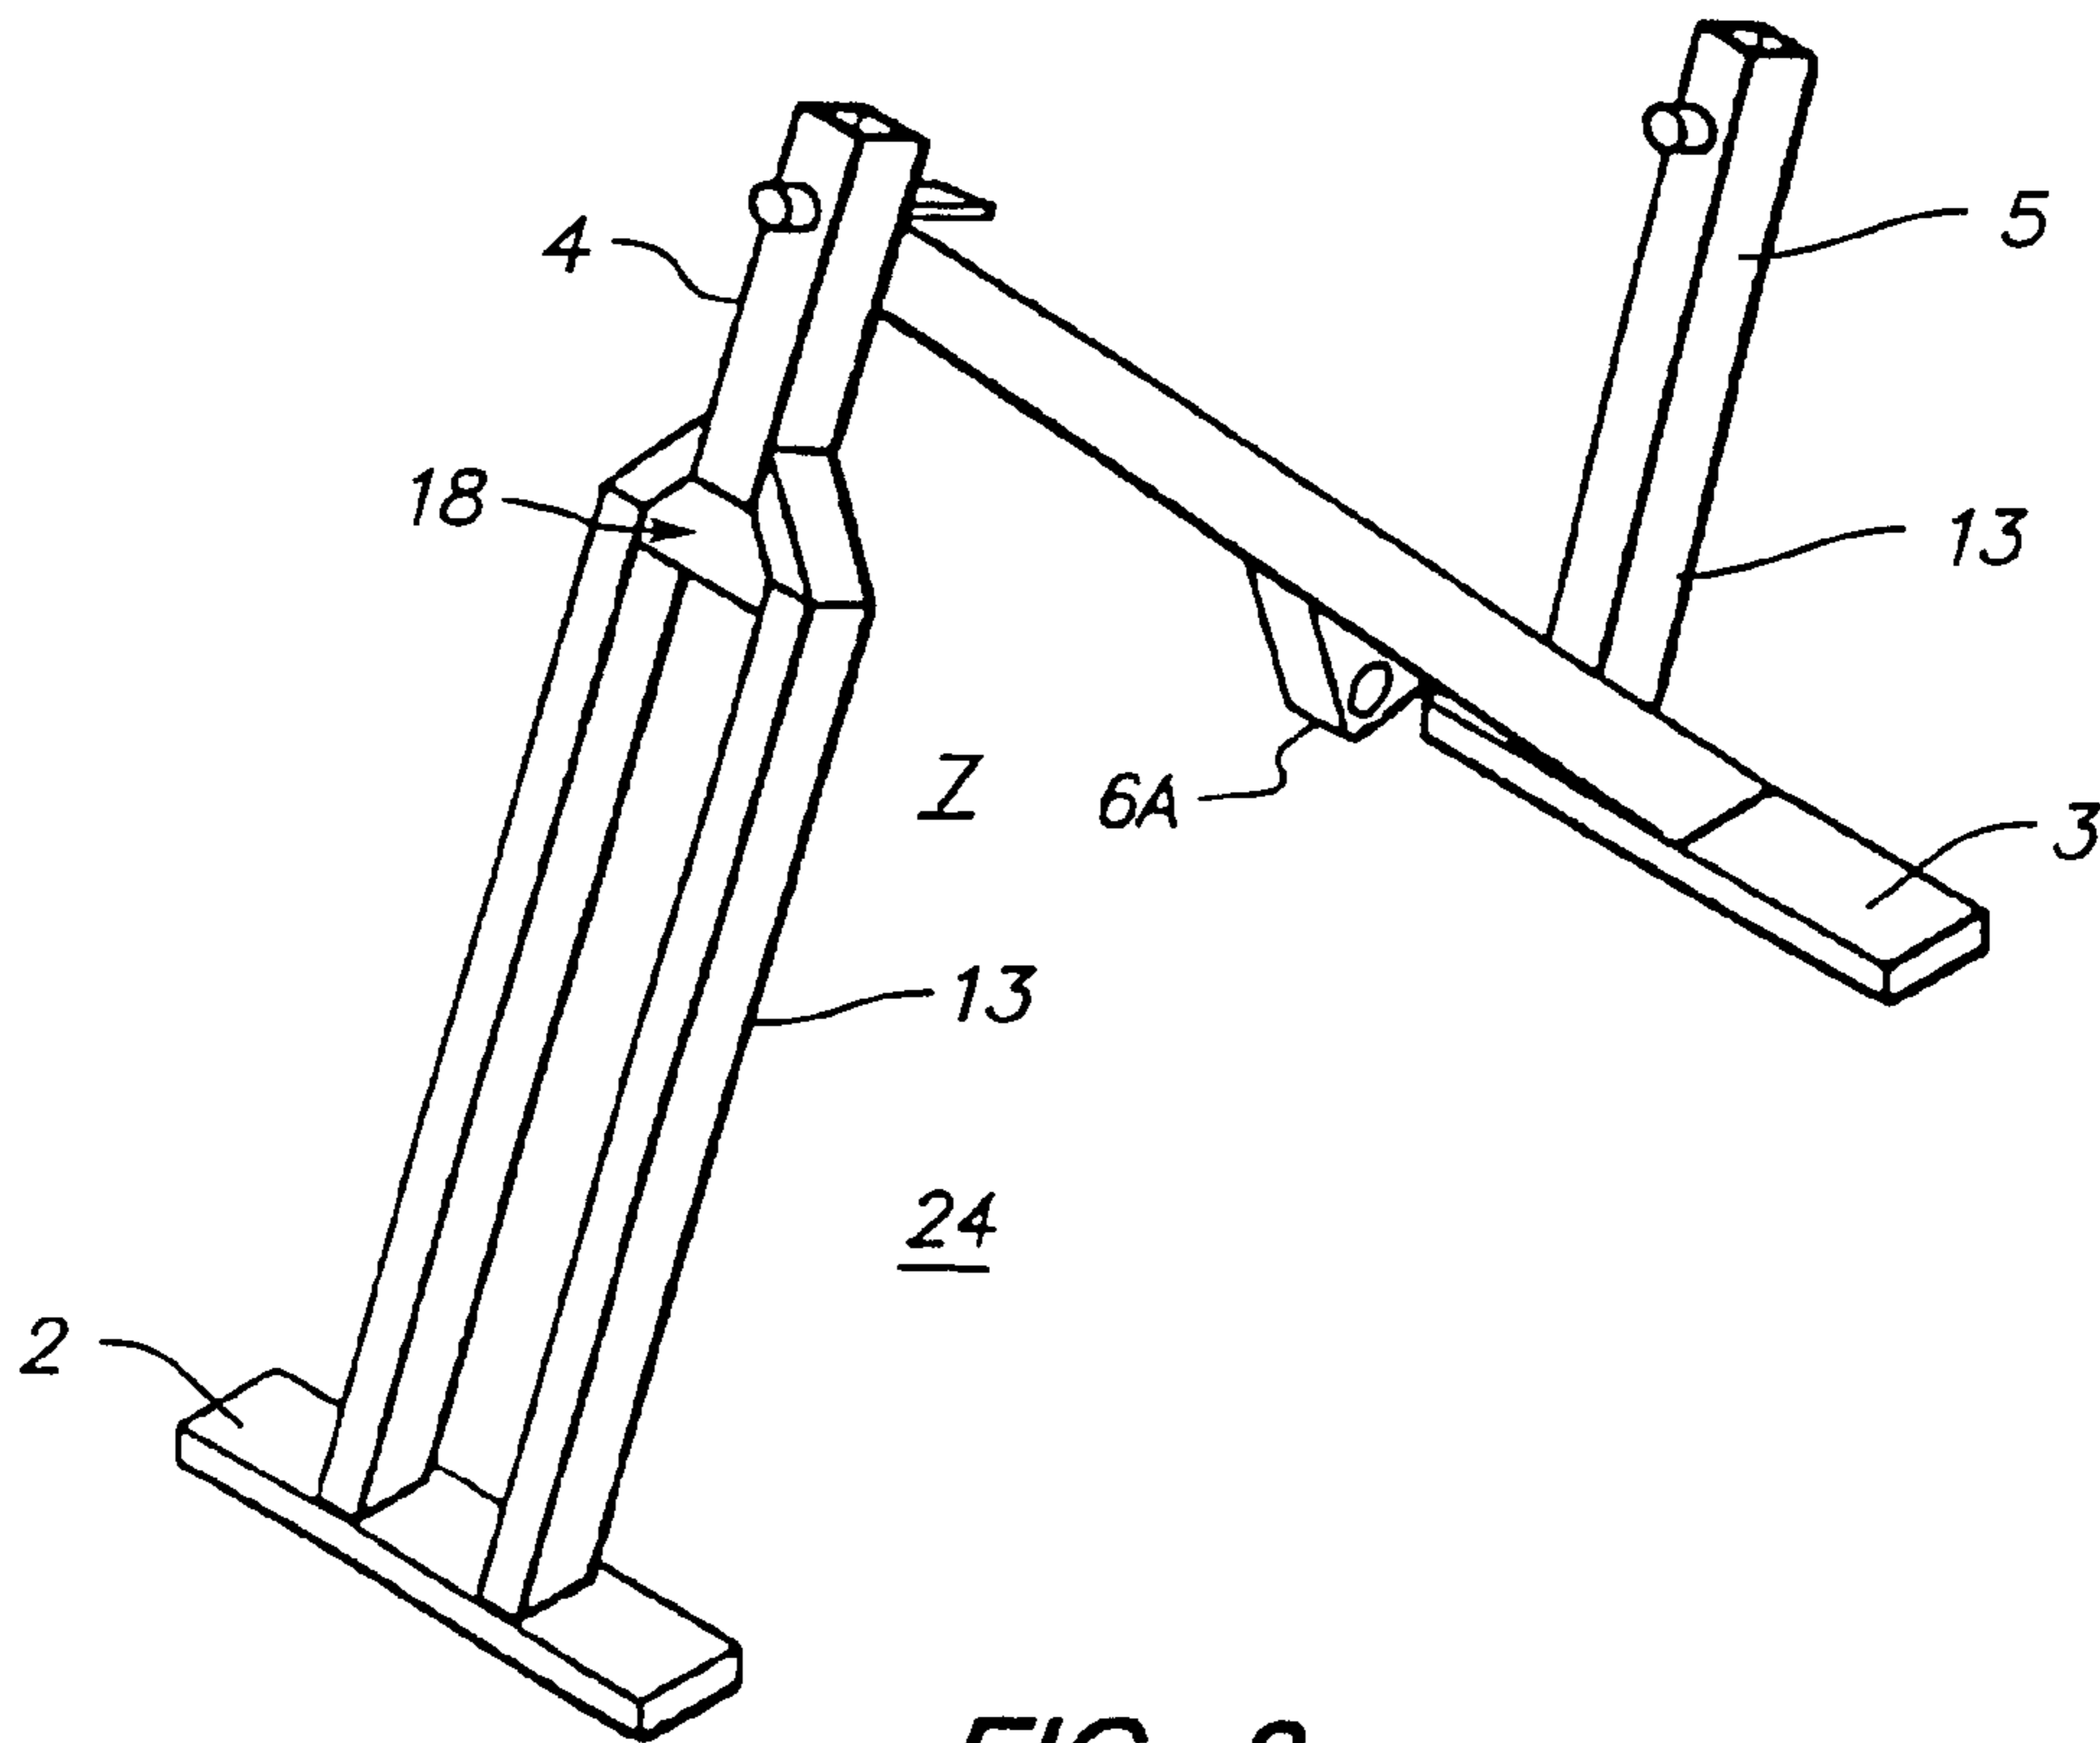


FIG. 8

STATIONARY EXERCISE BICYCLE

CROSS REFERENCE TO RELATED APPLICATIONS

This is a continuation application of application Ser. No. 10/086,662, filed Feb. 28, 2002, now U.S. Pat. No. 6,881,178, which is a continuation application of application Ser. No. 09/672,197, filed Sep. 28, 2000, now U.S. Pat. No. 6,468,185, which is a continuation of Ser. No. 09/019,352, filed on Feb. 5, 1998, now U.S. Pat. No. 6,155,958, which is a continuation of Ser. No. 08/736,976, filed on Oct. 25, 1996, now U.S. Pat. No. 5,722,916, which is a continuation of application Ser. No. 08/391,438, filed on Feb. 21, 1995, now abandoned, which is a continuation of Ser. No. 07/969,765, filed on Oct. 30, 1992, now U.S. Pat. No. 5,423,728.

BACKGROUND

Having a stationary exercise bicycle capable of simulating mountain bike riding is valuable.

This invention relates to a stationary exercise bicycle which is sturdy and comfortable for use during extended periods of pedaling while standing or sitting or a combination thereof and thus capable of meeting the needs of the more demanding rider.

In recent years, the popularity of the stationary exercise bicycle has increased dramatically together with the fitness craze. Stationary exercise bicycles are conventionally made with straight, brazed round tubing. A problem associated with using the round tubing in these bicycles is their propensity for fragility. They easily snap under increased stress, for example, during periods when the rider is pedaling in a standing position or in an alternating standing and sitting pedaling position. Also, the bicycle structure does not provide for the best flexibility according to the preferences of the rider.

There is a need to provide a stationary exercise bicycle which is more durable and overcomes the problems of the prior art.

SUMMARY

The invented stationary exercise bicycle seeks to avoid the disadvantages associated with conventional stationary exercise bicycles.

According to the invention, the stationary exercise bicycle comprises a stable frame. Additionally, the frame comprises a front socket and a rear socket, and front and rear ground support elements. Also provided is a pedal mechanism on said frame.

Also, the bicycle comprises a detachable seat socket. A seat is mounted on a seat socket at a level above the pedal mechanism. The seat is mounted for movement fore and aft relative to the seat socket and upwardly and downwardly relative to the pedal mechanism.

Additionally, the stationary exercise bicycle comprises a handlebar mounted in the front socket. The handlebar includes at least two different handle means. One handle means includes spaced apart and outwardly directed elements. The second handle means includes an element inwardly located relative to the first handle means. The handlebar is adjustable in the front socket.

Further, in one preferred form, the frame comprises at least multiple upstanding posts. The posts are inter-engaging to form at least one triangulated or V-shaped structure between the ground support elements and one of the sockets.

Additionally, at least part of the front socket, rear socket, or seat socket are formed with a hollow member having a cross-section which is non-cylindrical.

The pedal mechanism may include a cog operative with an endless chain having slots for engagement with the cog. A ring guard is provided and protective of at least the interaction of the teeth of the cog with the endless chain. The ring guard is located internally of the perimeter defined by the endless chain.

The invented stationary exercise bicycle is strong and comfortable for the rider. The adjustability of the bicycle facilitates comfortable riding of the bicycle in multiple positions, for example, sitting, standing and different gripping positions. Moreover, it is stress-resistant so that it can be used by the rider in a standing position or in an alternating standing and sitting pedaling position for extended periods. Riders of this bicycle can simulate the aerobic effect of mountain bike racing.

According to another aspect of the invention, a method of exercising on the stationary exercise bicycle comprises adjusting the height and the fore and aft position of the seat and optionally also adjusting the height of the handlebars to facilitate riding the stationary exercise bicycle in multiple positions and then riding the bicycle in multiple positions to simulate different bicycle riding conditions.

Additionally, the invented stationary exercise bicycle is mobile and the parts, easily replaceable. Unlike conventional stationary exercise bicycles, the present invention utilizes regular bicycle components. The user can replace certain parts from conventional bicycle shops and thus service the present invention with conventional bicycle componentry. Further, unlike prior art stationary exercise bicycles, the present invention has four basic parts which are detachable and can be placed in a portable transport carrier for mobility.

The invention is now further described with reference to the accompanying drawings.

DRAWINGS

FIG. 1 is an isometric view of a frame for a stationary exercise bicycle;

FIG. 2 is an isometric view of the pedal mechanism and a flywheel, both shown in phantom, including the ring guard, cog, and endless chain;

FIG. 3 is a detailed view of the ring guard in relation to the cog and frame;

FIG. 4 is an isometric view of the front fork triangle and an upstanding post;

FIG. 5 is an isometric view of the seat socket and the connective member;

FIGS. 6A, 6B, and 6C are isometric, front and side views, respectively, of the adjustable and detachable handlebar including the forwardly extending prongs, the lateral bar, and the element inwardly located relative to the forwardly extending prongs;

FIG. 7 is an isometric view of the triangulated structure portion of the frame; and

FIG. 8 is an isometric view of an alternative frame.

DESCRIPTION

A stationary exercise bicycle comprises a frame 1 (FIG. 1) or 24 (FIG. 8). The frame has a central ground support element 31, front 2 and rear 3 ground support elements, a front socket 4 and a rear socket 5 and a pedal mechanism 6. As discussed below and as shown in FIG. 1, pedal mechanism 6 generally includes a crankarm and crankset. The rear socket 5

is capable of receiving a seat socket **12**. Further, a seat **20** may be mounted on the seat socket **12** at a level above the pedal mechanism **6**. The seat **20** is mounted for movement fore and aft relative to the seat socket **12** and upwardly and downwardly relative to the pedal mechanism **6**.

This stationary exercise bicycle further comprises a handlebar **8** mounted in the front socket **4**. The handlebar **8** includes at least two different handle means **9** and **10**. One handle means includes spaced apart and outwardly directed elements **9**. The second handle means includes an element inwardly located **10** relative to the first handle means.

The outwardly directed handle means **9** have forwardly extending prongs **9A** and **9B** (FIG. **6A**) which are directed axially away from the seat socket **12**. The axially directed prongs **9A** and **9B** are connected with a lateral bar **11** of the handlebar **8** at one end and are free at an opposite end.

The inner handle means **10** is at least part of a closed ring. The ring is located between the outer handle prongs. Further, the ring is connected to a lateral bar **11** of the handlebar **8**.

The closed ring may be a semi-circle. The axis for the semi-circle is located substantially about midway through the lateral bar **11** of the handlebar **8**.

The handlebars have been designed with the user's handlebar position needs in mind. Because of the need for the different hand positions during the ride, the ring allows for different hand positions, movements, quick transition from sitting to standing, and standing back to sitting. It also allows, without the use of an attached arm pad, the ability to lie the forearm on the ring portion of the handlebar and simulate a real training cycling position.

The handlebar **8** may be connected to the frame **1** by the front socket **4**. A handlebar pop pin **22** permits adjustment of the handlebar **8** according to the requirements of the rider. FIGS. **6A** and **6B** show the holes which permit the connecting member to be arrestable by a pop pin for adjustment.

Applicant contemplates that alternative handlebars may be connected to the frame **1** or **24** in accordance with the rider's needs.

The frame **1** (FIG. **1**) or **24** (FIG. **8**) further comprises at least multiple upstanding posts **13**. In a preferred form, the posts inter-engage to form at least one triangulated structure **14** between the ground support elements **2** or **3** and one of the sockets.

The frame **1** includes at least two triangulated structures **7** and **14** between the sockets **4**, **5**, and **12**. The two triangulated structures **7** and **14** have at least one common upstanding post **13** forming at least one wall of the triangulated structures **7** and **14**. One of the triangulated structures **7** and **14** includes an arm or cross-element **6A** intended to mount the pedal mechanism **6**.

The upstanding posts **13** form part of the triangulated structure **7** and **14**. Moreover, the upstanding posts **13** are all located at a non-horizontal, non-vertical axis.

The triangulated structures **7** and **14** include the rear triangle **14A** which includes an inverted V-shaped section and which functions to stabilize the frame **1**; the bottom bracket triangle **14B** which includes an upstanding V-shaped section and which functions to stabilize the frame **1** so a rider can pedal standing; the front triangle-like structure **7** which functions to permit total range of motion; and a front fork triangle **18**.

The rear triangle **14A** is important as a stabilizing block. Unlike conventional stationary exercise bicycles, the small base of this triangle gives the bike its total rigidity in the rear.

The bottom bracket triangle **14B** gives the central part of the stationary exercise bicycle its rigidity and form for standing. Further, arm or cross-element **6A** allows for conventional

pedal mechanisms (i.e., crankarm and crankset) be used with a conventional clipless pedal or a regular bicycle pedal and toe clip.

The front triangle-like structure **7** is wide enough to house a flywheel (FIG. **2**). The front triangle-like structure **7** gives the stationary exercise bicycle its total range of motion moving the flywheel in and out and giving the stationary exercise bicycle its base length or reel length from foot position to foot position.

The flywheel is connected to the frame **1** or **24** by the front fork triangle **18**.

Further, at least part of the front socket **4**, rear socket **5**, or seat socket **12** are formed with a hollow member having a cross section being non-cylindrical. The sockets described herein permit a matingly shaped connecting member (such as the handlebar **8**, the adjustable and detachable seat **20**) the connecting member being arrestable by a pop pin **19**, **21**, **22**.

The hollow member may have a polygonal cross section (preferably quadratic). For example, in the illustrated example, the polygonal cross section is substantially square.

The seat is adjustable for height and connected to the seat socket **12**. The seat post pop pin **19** permits height adjustment of the seat. The fore and aft saddle pop pin **21** permits adjustment of the seat **20** by sliding fore and aft in the seat socket **12**.

Because of the adjustability of the seat and the handlebar, a rider theoretically may be as tall as 15 feet and weigh up to 900 pounds. The handlebar and seat adjustability provides for a versatile bicycle which can be used by persons of many different physiques, from small, light and short to large, tall and heavy.

Referring now to FIG. **3**, the pedal mechanism **6** includes a cog **15** operative with an endless chain **16** having slots for engagement with the cog **15**. Additionally, the pedal mechanism **6** includes a ring guard **17** protective of at least the interaction of the teeth of the cog **15** with the endless chain **16**. The ring guard **17** is located internally of the perimeter defined by the endless chain **16**.

It would be desirable to provide attachments to the present invention. For example, a water bottle may be attached directly to the present invention or indirectly by means of a velcro device or any carrier means for attaching the water bottle to the stationary exercise bicycle.

Additionally, an ergometer may be attached to the present invention. Also, a computer controlled energy measuring and indicating device may be attached to the present invention.

The stationary exercise bicycle may comprise a dual chain tension device which is adjustable while the rider is in motion. Moreover, the stationary exercise bicycle may comprise a cable resistance braking system which permits the rider to adjust the resistance of the flywheel. A resistance plate **23** may support a cable to the flywheel.

The length and width of the stationary exercise bicycle is appropriate for standing and sitting while pedaling. Additionally, the width is appropriate for pedaling while sitting and for stabilization when the rider pedals while standing and rocking the body from side to side.

In a preferred form, the triangulated structures **14A**, **14B**, **7** stabilize the stationary exercise bicycle. These triangulated structures form the "integrity" structure of the stationary exercise bicycle.

The symmetry of this machine is very basic. The genius in the present invention is in its simplicity. The present invention simulates road conditions exactly as if the rider is pedaling a conventional, non-stationary bicycle.

Applicant contemplates many other examples of the present invention each differing by detail only. For example, there are many variations of the sockets described herein. The

5

sockets described herein may not only permit a matingly shaped connecting member to fit inside (such as the handlebar **8**, the adjustable and detachable seat **20**), the connecting member being arrestable by a pop pin **19**, **21**, or **22**. In fact, the matingly shaped connecting member may be a hollow into which the socket fits, e.g., the rear, front, or seat socket.

Additionally, the handlebar **8** may include at least two different handle means. One handle means includes spaced apart and outwardly directed elements **9**. The second handle means may include an element (e.g., a closed ring) outwardly located relative to the first handle means.

Further, in one form, the frame may have a plurality of segments. Instead of a single unit, the frame may collapse into several units which permits even greater mobility of the stationary exercise bicycle for transport. Each unit of the frame may be re-assembled using bolts or any other type of well known connecting means.

The above description and drawings are only illustrative. They are not intended to limit in any way the invention as set out in the claims which follow.

The invention claimed is:

1. A method of exercising by simulating different bicycle riding conditions on a stationary exercise bicycle, the stationary exercise bicycle comprising a frame having front and rear sockets and two V-shaped sections, one V-shaped section

6

comprising two members converging to a point, the other V-shaped section comprising members converging to a different point, wherein the two V-shaped sections overlap along a member, the member including one of the sockets, a pedal assembly mounted to the frame, a seat adjustably mounted to the rear socket, a flywheel mounted to the frame and coupled to the pedal assembly via a chain thereby forming a dual chain tension device, and a handlebar adjustably mounted to the front socket, the handle bar including at least one handle that provides multiple gripping positions for a rider's hands, the method comprising:

riding the stationary exercise bicycle in multiple positions to simulate different bicycle riding conditions whereby the multiple positions include a standing position and a sitting position, wherein the dual chain tension device facilitates a smooth transition between sitting and standing riding positions, and gripping the handlebar in multiple gripping positions.

2. The method of claim **1**, further comprising riding the stationary exercise bicycle in a seated position while gripping the handlebar at a first gripping position, and riding the stationary exercise bicycle in a standing position while gripping the handlebar at a second gripping position.

* * * * *