



US007275868B2

(12) **United States Patent**  
**Miller**

(10) **Patent No.:** **US 7,275,868 B2**  
(45) **Date of Patent:** **Oct. 2, 2007**

(54) **LAUNDRY RETENTION DEVICE**

(76) Inventor: **David S. Miller**, 11 Lewis Cir.,  
Wilmington, DE (US) 19804

(\* ) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/145,049**

(22) Filed: **Jun. 3, 2005**

(65) **Prior Publication Data**

US 2005/0229329 A1 Oct. 20, 2005

**Related U.S. Application Data**

(60) Division of application No. 10/178,467, filed on Jun.  
24, 2002, now abandoned, which is a continuation of  
application No. 09/901,449, filed on Jul. 9, 2001, now  
Pat. No. 6,478,464.

(51) **Int. Cl.**

**B65D 33/28** (2006.01)  
**B65D 30/04** (2006.01)  
**B65D 30/06** (2006.01)  
**A45C 1/04** (2006.01)  
**A45F 3/00** (2006.01)  
**F41C 33/02** (2006.01)  
**F42B 39/02** (2006.01)

(52) **U.S. Cl.** ..... **383/76**; 383/74; 383/117;  
383/75; 224/663; 224/665; 224/671; 224/675

(58) **Field of Classification Search** ..... 8/147,  
8/148, 158, 159; 383/107, 117, 22, 24, 39,  
383/74, 75, 76; 224/663, 665, 671, 675;  
134/172, 173, 176; 239/172

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,077,959 A 11/1913 Gregory et al.

1,493,594 A 5/1924 Binns  
1,597,734 A 8/1926 Sousa, Jr.  
2,317,176 A 4/1943 Byrd  
3,864,790 A \* 2/1975 Reinwall, Jr. .... 24/129 R  
4,228,834 A 10/1980 Desnick  
4,411,267 A 10/1983 Heyman  
4,630,312 A \* 12/1986 Milstein ..... 383/86  
4,713,033 A 12/1987 Cameron  
D294,757 S 3/1988 Kahane et al.  
4,884,732 A 12/1989 Sunderland  
4,911,345 A 3/1990 James et al.  
4,923,105 A 5/1990 Snyder  
4,974,709 A 12/1990 Furlow et al.  
4,979,833 A 12/1990 Cook  
5,050,999 A 9/1991 Van Loon, III  
5,060,835 A 10/1991 Payne  
5,150,824 A 9/1992 Alvarez et al.  
5,238,305 A 8/1993 Feller  
5,353,975 A 10/1994 Libertucci


(Continued)

*Primary Examiner*—Michael Kornakov  
*Assistant Examiner*—Rita R Patel  
(74) *Attorney, Agent, or Firm*—Connolly Bove Lodge &  
Hutz LLP

(57) **ABSTRACT**

The invention is directed to a laundry retaining device  
comprising a strap and a bag. The strap is suitable for  
retaining larger articles of clothing that have openings to  
pass the strap through, such as shirts and shorts. The bag,  
preferably a mesh bag, retains smaller articles of clothing or  
articles that do not have openings to pass the strap through.  
The device allows for the washing and drying of a set or  
several sets of clothes at once without having to sort and  
recreate each set of laundered clothes.

**4 Claims, 3 Drawing Sheets**

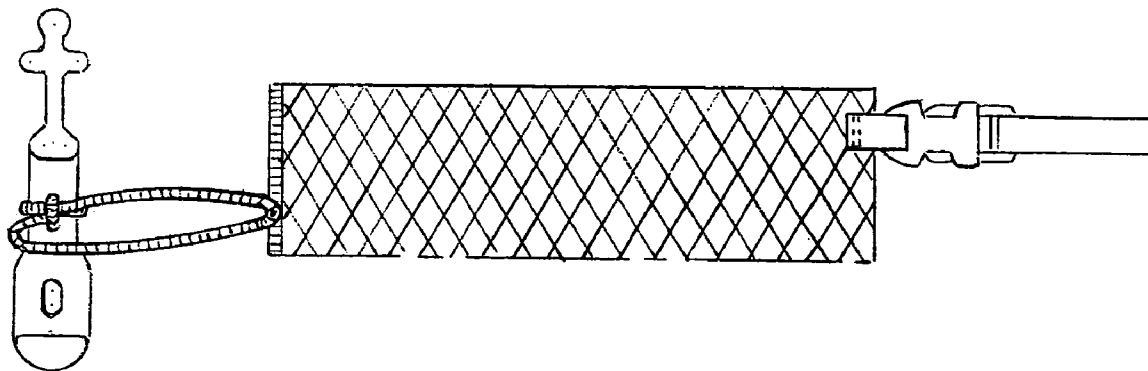


# US 7,275,868 B2

Page 2

---

U.S. PATENT DOCUMENTS			
5,551,128	A *	9/1996	Townsend ..... 24/302
5,558,440	A	9/1996	Miller
5,704,531	A	1/1998	Nam
5,836,497	A	11/1998	Pelish
D411,671	S	6/1999	Hamblin
6,038,748	A *	3/2000	Durney et al. .... 24/302
6,070,282	A	6/2000	Underly et al.
6,092,702	A	7/2000	Cassidy, IV
6,095,390	A	8/2000	Bogle
6,174,848	B1 *	1/2001	Dawson et al. .... 510/297
6,216,933	B1	4/2001	Healy
6,257,406	B1	7/2001	Garino
6,279,799	B1	8/2001	Horton
2005/0242248	A1 *	11/2005	Ryan ..... 248/95


\* cited by examiner

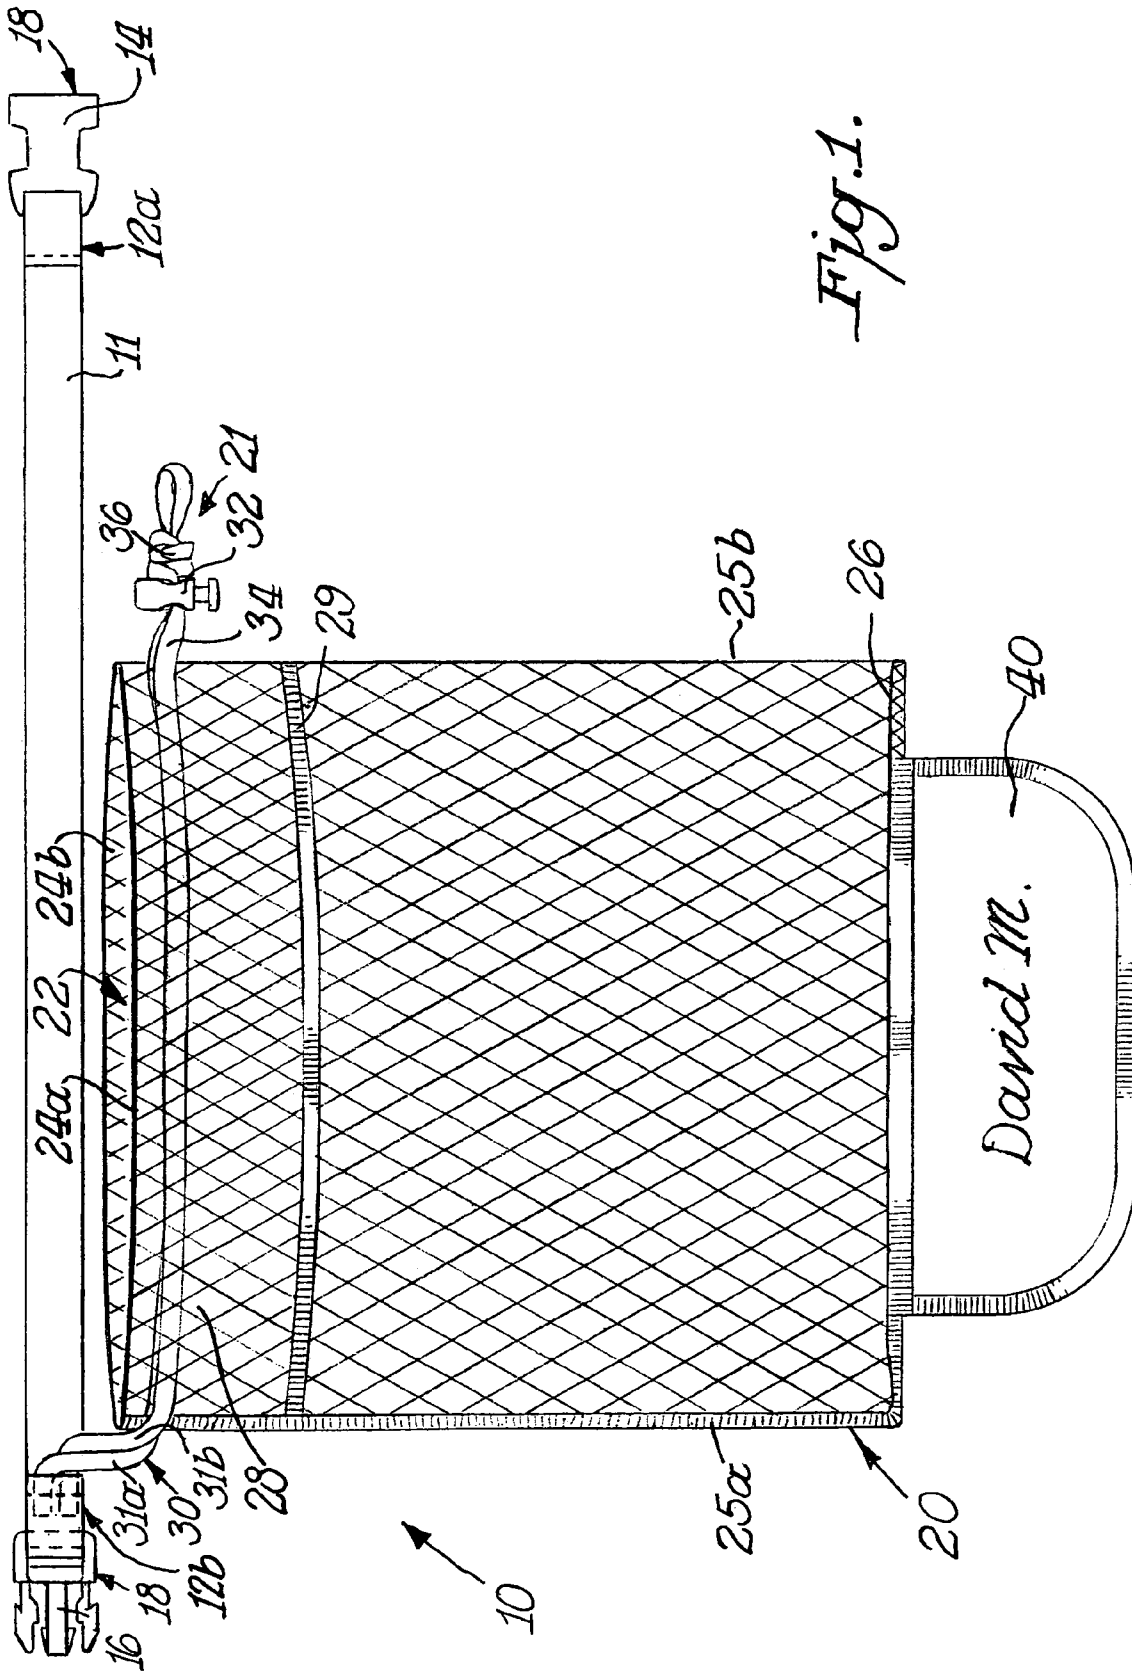

*Fig. 2.*



*Fig. 3.*

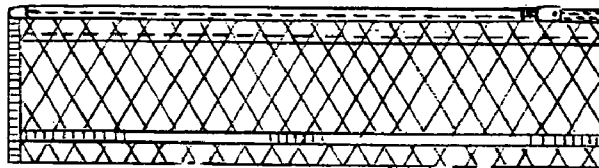

*Fig. 4.*


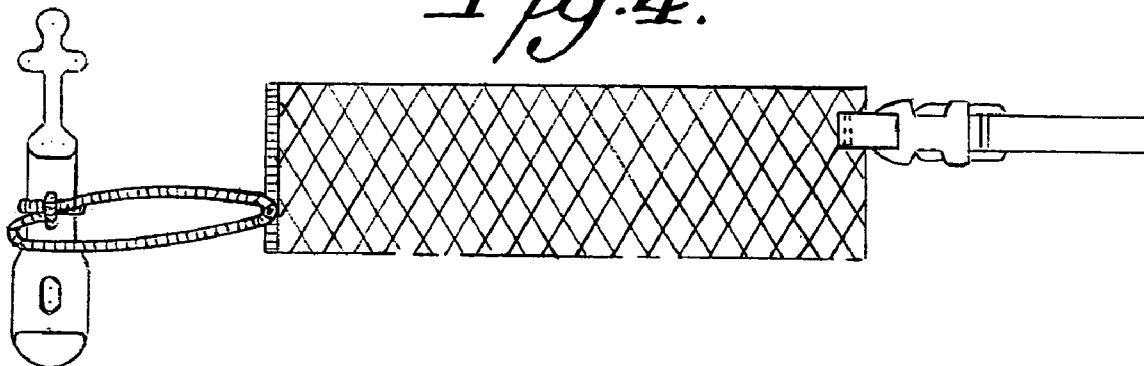


Figure 5

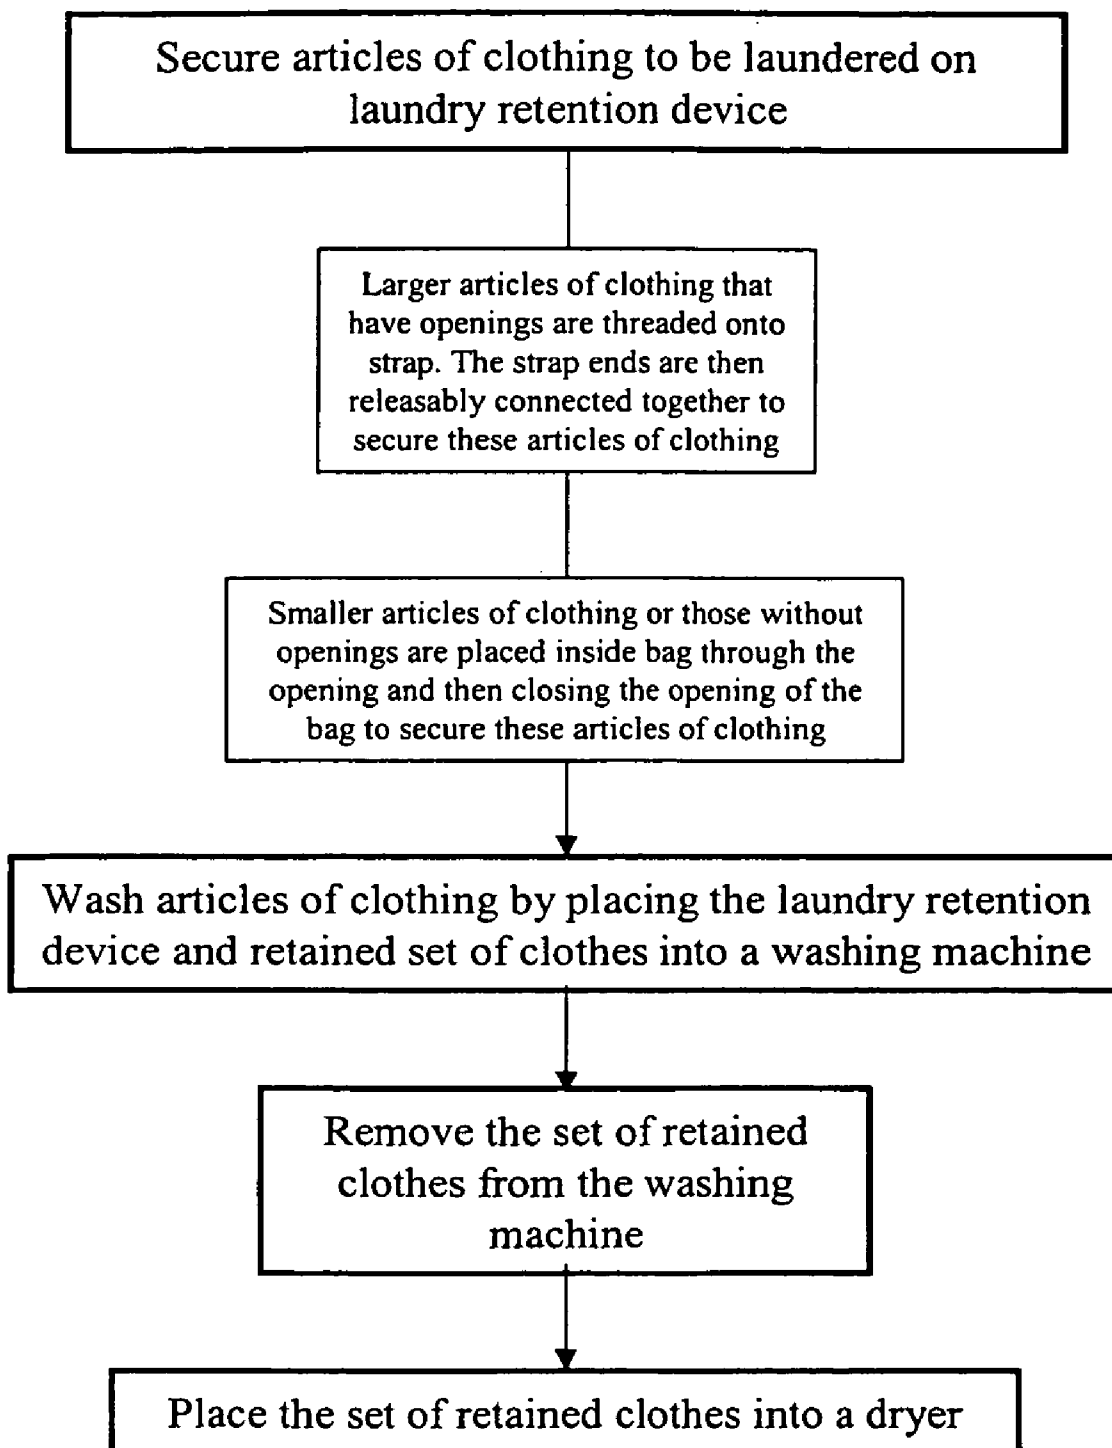

**LAUNDRY RETENTION DEVICE****CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a divisional of application Ser. No. 10/178,467 filed Jun. 24, 2002 now abandoned, which is a continuation application of Ser. No. 09/901,449 filed on Jul. 9, 2001 now U.S. Pat. No. 6,478,464.

**INTRODUCTION**

The invention is directed to a laundry retention device comprising a strap and a bag. The device provides a convenient means to keep a set of clothes together, including articles of clothing that do not have openings to pass a strap through, such as socks, so that a set or several sets of clothes can be laundered at once without having to sort and recreate the set or sets of laundered clothes.

**BACKGROUND OF THE INVENTION**

To launder sets of clothing for a group of individuals, such as athletic uniforms, it is necessary to group each set of clothes so that it can be returned to the proper individual. To efficiently launder several sets of clothes at once, a retention device is needed to keep each set of clothes together while the clothes are laundered. With such a device, the clothes can be returned to the individual without having to manually sort through all of the clothing and recreate each set. An important aspect of such a laundry retention device is the ability to securely retain smaller articles of clothing, such as socks. These smaller articles can be the most difficult and time consuming to sort.

There are three general devices known for retaining laundry. These are: (1) a large laundry pin; (2) a mesh bag; and (3) a strap or leash. Each of these devices has drawbacks that makes it unsatisfactory for use with small articles of clothing.

Laundry pins resemble large safety pins that are about five inches in length and are typically made of metal. A laundry pin retains articles of clothing by either passing through an opening in the article or by piercing the article. Articles of clothing that do not have an opening to pass the pin through, such as socks, must be pierced. Articles that are too thick to pass the pin through must also be pierced. Piercing clothes damages the clothing. Another drawback of laundry pins is that the shape causes them to snag and tear other garments when several sets of clothes are laundered at once. Further, because of the size and shape of the pin, the amount of clothes that can be retained with a single pin is limited. Still another limitation of laundry pins is that any identification tag for the clothes must also be attached to the pin.

Mesh bags are conventionally constructed of mesh nylon or similar material. While mesh bags avoid the problems associated with laundry pins, such as the snagging and tearing of clothes, large clothing articles tend to wad up in the bag during washing. The tendency for clothes to wad up in the mesh bags prevents the clothes from being fully cleaned and dried. Also, when a mesh bag is placed in a dryer the clothes tend to become severely wrinkled.

Laundry straps or leashes are suitable for retaining articles of clothing that have openings to pass the strap through so that the strap can be closed to form a loop. The size of the loop allows for larger clothes to be effectively cleaned and dried without causing excessive wrinkling. Additionally, because there are no sharp edges or places to snag, laundry

straps do not damage the clothes. However, laundry straps have the inherent problem of being incapable of retaining articles of clothing that do not have openings to pass the strap through, such as socks.

One solution to this inherent drawback of laundry straps is the addition of a second buckle to form a smaller loop with the strap. Such a device is disclosed in Townsend, U.S. Pat. No. 5,551,128 (1996). However, the ability for this type of device to securely retain socks and other small articles of clothing is limited as these articles are only held by the friction between the clothes and the smaller loop.

Another solution to the inherent drawback of laundry straps is the combination of the strap and a loop of cord with a cordlock fastener to retain socks. Such a device is disclosed in Durney et al., U.S. Pat. No. 6,038,748 (2000). However, this device, like that of Townsend, retains small clothes solely by the friction between the clothes and the nylon cord. Both of these devices are known to unsuccessfully retain socks and other small articles of clothing without openings, particularly when the clothes are made from modern synthetic fabrics which do not function well with friction retention systems.

The drawbacks observed in the prior art clearly show that there is a need to provide a laundry retention device that retains socks and other small articles of clothing that do not have openings. These drawbacks have been overcome by the inventor through the addition of a relatively small bag attached to a laundry strap. The invention has unexpectedly been found to successfully retain articles of clothing without openings, such as socks, while being able to effectively clean and dry all of the retained articles of clothing. Because the present invention does not retain socks and other small articles of clothing by friction, the invention securely holds clothes made from both natural and, particularly, synthetic fibers.

**SUMMARY OF THE INVENTION**

The present invention is a device for retaining laundry comprising a strap having opposing strap ends with a fastener to releasably connect the strap ends and a bag, the bag having an opening and a closure to close the opening. The bag is attached to the strap. The strap retains clothes by passing one strap end through openings in the clothes and connecting the strap end to the other strap end using the fastener. The bag retains articles of clothing that do not have openings to pass the strap through, such as socks. The bag is made of mesh, screen, fabric, perforated fabric, or other suitable material known by an ordinarily-skilled artisan to allow the clothes placed inside the bag to be effectively washed and dried. In a preferred embodiment of the present invention, the bag is a mesh bag.

In view of the above, it is an object of the present invention to provide a device to securely retain articles of clothing both with and without openings so that all of the retained clothes can be effectively cleaned and dried together. Effective cleaning and drying involves allowing the clothes to be thoroughly washed and dried. It is an object of the present invention that using the device allows for the retained clothes to be as effectively washed and dried as if the clothes were placed individually, i.e., not retained, into the washer and dryer.

It is another object of the present invention that more than one set of clothes can be simultaneously washed and dried by retaining each set of clothes with a device. It is yet another object of the present invention that an identification

tag is attached to the device so that each device and the retained clothes can be easily identified.

Further scope of applicability of the present invention will become apparent from the following detailed description. However, it should be understood that the detailed description of the preferred embodiments of the invention is provided for illustration only. Various changes and modifications within the spirit and scope of the invention will become apparent to an ordinarily-skilled artisan from this detailed description. Therefore, it is understood that both the above general description and the following detailed description are exemplary and explanatory and do not restrict the scope of the claimed invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the following detailed description and the accompanying drawing, which is only illustrative, and is not limiting of the present invention.

FIG. 1. A schematic view of the laundry retention device embodying the present invention.

FIG. 2. A partial schematic view of the laundry retention device having a hook and loop strip closure.

FIG. 3. A partial schematic view of the laundry retention device having a zipper closure.

FIG. 4. A partial schematic view of the laundry retention device having a toggle closure.

FIG. 5. A flow chart of a method of laundering articles of clothing using the laundry retention device.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

An embodiment of the laundry retaining device **10** of the present invention is shown in FIG. 1. In this embodiment, the device **10** comprises a strap **11** having opposing strap ends **12a** and **12b**. Attached to one strap end **12a** is a female side-release fastener **14**. Attached to the other strap end **12b** is a male side-release fastener **16**. The female and male side-release fasteners together form a fastener **18** for releasably connecting said opposing strap ends **12a** and **12b** of the strap **11**.

In a particularly preferred embodiment, the strap **11** may be made from a variety of materials and have a variety of lengths as determined by an ordinarily-skilled artisan. Preferably, the strap **11** is made from nylon and is about three-quarters of an inch in width and 18 inches in length (Part No. N0019, Tape Craft, Anniston, Ala.). Additionally, in this particularly preferred embodiment, the fastener **18** is a FASTEX® SR-¾ squeezeable, side-release fastener (Part No. 101-0075-5614, ITW Nexus, Wood Dale, Ill.).

The device **10** further includes a bag **20**. The bag can be made of mesh, screen, fabric, perforated fabric, or similar materials known by an ordinarily-skilled artisan to allow for the washing and drying of clothes placed inside the bag. In a particularly preferred embodiment, the bag is a mesh bag.

In the embodiment shown in FIG. 1, the bag **20** is relatively flat when empty and has two edges **25a** and **25b** and a bottom **26**. The bag **20** has an opening **22**, said opening having a pair of opposing opening sides **24a** and **24b**. In the preferred embodiment shown in FIG. 1, the opening **22** also has an opening flap **28** that is formed by folding over the top of the bag **20** near the opening **22**. In the same illustrated embodiment, the opening flap **28** forms an opening collar **29** by attaching the opening flap **28** to the top of the bag **20** around the perimeter of the opening **22**.

The bag **20** has a closure **21** to close said opening **22**. The closure **21** can be any means known by an ordinarily-skilled artisan suitable to close a bag for use in laundering clothes. Such a closure **21** includes, but is not limited to: a drawstring; a cord and a cordlock fastener; a conventional zipper; a plastic zipper such as those found in ZIPLOC® bags and ZIPLOC® Easy Zipper bags (S.C. Johnson Home Storage Inc., Racine, Wis.), and those described in Naito, U.S. Pat. No. Re. 28,969, Kirkpatrick, U.S. Pat. Nos. 4,186,786 and 4,285,105, and Dais et al. U.S. Pat. No. 5,140,727 (1992); and hook and loop strips such as VELCRO® hook and loop tapes (Velcro USA Inc., Manchester, N.H.). Depending on the type of closure **21** used in the particular embodiment of the inventions, the closure **21** should either cinch closed the opening **22** or secure the opposing opening sides **24a** and **24b** so that clothing articles placed inside the bag **20** do not escape or fall out of the bag during the laundering process. For example, in the case of a convention or plastic zipper closure **21**, the zipper is located in the opening **22** so that it will close the opening **22** of the bag **20**. In the case of a hook and loop strips closure **21**, the hook and loops strips are located in the opening **22** so that they will close the opening **22** of the bag **20**.

In the illustrated embodiment shown in FIG. 1, the closure **21** comprises a cord **30** and a releasable cordlock fastener **32**. The cord **30** passes around the perimeter of the opening **22** through the opening collar **29**. In a particularly preferred embodiment, the cord **30** has a pair of cord ends **31a** and **31b**. One cord end **31a** is attached to one strap end **12b**. The other cord end **31b** passes through the opening collar **29** on one of the opening sides **24a** beginning at the edge of the bag **25a** that is closest to the strap. The cord end **31b** then exits the opening collar **29** on the edge of the bag **25b** that is farthest from the strap end **12b** and extends outside the opening collar **29** creating a cord tail **34**. The cord end **31b** then passes back through the opening collar **29** along the other opening side **24b** and attaches to the same strap end **12b**. In this embodiment, the cord **30** forms a loop that passes through the opening collar **29** around the perimeter of the opening **22**. In this same particularly preferred embodiment, the cord tail **34** is threaded through a releasable cordlock fastener **32** and the cordlock fastener **32** is secured on the cord **30** by a knot **36** in the cord **30**. In this particularly preferred embodiment, the opening **22** is closed by sliding the cordlock fastener **32** along the loop of cord **30** towards the strap end **12b** cinching the opening **22** closed. The cordlock fastener **32** prevents the opening **22** from opening during laundering. To open the bag **20**, the user slides the cordlock fastener **32** away from the strap end **12b** allowing the opening **22** to open. Embodiments employing drawstrings, conventional zippers, plastic zippers, and hook and loop strips can be opened and closed using methods known by ordinarily-skilled artisans to be suitable for each closure type.

The bag **20** is attached to the strap **11** using any means known by an ordinarily-skilled artisan. In the illustrated embodiment shown in FIG. 1, the bag **20** attaches to the strap **11** via the cord **30**. The cord **30** has two cord ends **31a** and **31b**, one cord end **31a** connects to one strap end **12b**. The other cord end **31b** threads through the opening collar **29** along the perimeter of the opening **22** and then the other cord end **31b** attaches to the same strap end **12b**. Other embodiments include directly attaching a portion of the bag **20** to the strap by sewing, gluing, heat welding, or similar means. Still other embodiments include attaching the bag **20**

to the strap 11 along one opposing side of the opening 24a or 24b. In such embodiments, the closing means would preferably be a conventional zipper, a plastic zipper, or hook and loop strips as the opening 22 would not be easily cinched closed.

In a particularly preferred embodiment, the bag 20 is a mesh bag and is made from nylon and has an opening 22 of about 9 inches in width measured from one edge 25a to the other edge 25b. In this same particularly preferred embodiment, the bag 20 measures about 9.5 inches deep from the opening 22 to the bottom 26 and is made of polyester (Part No. TA 97, Apex Mills, Inwood, N.Y.). Further in this same particularly preferred embodiment, the cord 30 is made of nylon and the cordlock fastener 32 is a nylon cordlock fastener ("Toaster Ellipse," Part No. 350-2000, ITW Nexus, Wood Dale, Ill.) and the cord 30 is made of nylon (Part No. 4201, Frankin Braid Co., Emporia, Va.). The length of the cord 30 in this same embodiment is sufficient to allow the opening 22 to fully open and still have a cord tail 34 exposed outside of the opening collar 29.

The illustrated embodiment of FIG. 1 has an identification tag 40 that allows for the identification of each set of clothes that is retained by the device 10. Thus, several sets of clothes can be washed and dried at once, each being identified by the unique markings on the identification tag 40.

To use the device 10, larger articles of clothing that have openings, such as shirts and shorts, are threaded onto the strap 11 by passing one strap end 12a through the openings and coupling the strap end with the other strap end 12b via the fastener 18. Smaller articles of clothing, or those articles that do not have openings that would allow the strap 11 to pass through them, are placed inside the bag 20 through the opening 22 and then closing the opening 22 with the closure 21.

The device 10 and retained clothes are then placed in a washing machine. Because the clothes are retained on the device 10, several sets of clothes, each set retained on a device 10, can be washed at one time. The individual sets of clothes are then removed from the washer and placed in a dryer. By using the device 10, each set of clothes is maintained during washing and drying. Therefore, the device 10 eliminates the need to sort through the completed laundry to recreate each individual set of clothes.

While the invention has been particularly shown and described with reference to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made without departing from the spirit and scope of the invention as defined in the appended claims.

I claim:

1. A method of laundering articles of clothing comprising:  
(a) securing the articles of clothing to be laundered on a laundry retention device comprising:

- (i) a strap having opposing strap ends;
- (ii) a fastener for releasably connecting said opposing strap ends; and
- (iii) a bag having an opening and a closure to close said opening of the bag; wherein said bag is directly attached to said strap;

wherein the laundry retention device secures the articles of clothing that have openings by passing one end of the strap through an opening in the article of clothing and coupling the strap end with the other strap end via the fastener, and wherein the laundry retention device secures the articles of clothing that do not have openings to pass the strap through by placing those articles of clothing inside the bag and closing the opening of the bag with the closure; and

(b) washing the articles of clothing by placing the laundry retention device and the secured clothes into a washing machine.

2. The method of doing laundry of claim 1 further comprising step (c) placing the laundry retention device and the secured clothes into a dryer.

3. A method of laundering articles of clothing comprising:  
(a) securing at least one set of articles of clothing on a laundry retention device comprising:

- (i) a strap having opposing strap ends;
- (ii) a fastener for releasably connecting said opposing strap ends; and
- (iii) a bag having an opening and a closure to close said opening of the bag; wherein said bag is directly attached to said strap;

wherein the laundry retention device secures the articles of clothing that have openings by passing one end of the strap through an opening in the article of clothing and coupling the strap end with the other strap end via the fastener, and wherein the laundry retention device secures the articles of clothing that do not have openings to pass the strap through by placing those articles of clothing inside the bag and closing the opening of the bag with the closure; and

(b) washing the at least one set of articles of clothing by placing the laundry retention device and the secured set of clothes into a washing machine.

4. The method of doing laundry of claim 3 further comprising step (c) placing the laundry retention device and the secured set of clothes into a dryer.

\* \* \* \* \*



UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,275,868 B2  
APPLICATION NO. : 11/145049  
DATED : October 2, 2007  
INVENTOR(S) : David S. Miller

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Claims:

In Claim 3, in column 6, on line 40, "secures the articles of clothing tat do not have openings" should read -- secures the articles of clothing that do not have openings --.

Signed and Sealed this

Twenty-fifth Day of December, 2007

A handwritten signature in black ink that reads "Jon W. Dudas". The signature is written in a cursive style with a large, looped initial "J".

JON W. DUDAS  
*Director of the United States Patent and Trademark Office*