



(19) **United States**

(12) **Patent Application Publication**
Baumert

(10) **Pub. No.: US 2003/0025491 A1**

(43) **Pub. Date: Feb. 6, 2003**

(54) **EYE MONITOR**

Publication Classification

(75) Inventor: **Wolfgang Baumert**, Schwieberdingen
(DE)

(51) **Int. Cl.⁷ G01R 19/18**

Correspondence Address:
SUGHRUE MION, PLLC
2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, DC 20037 (US)

(52) **U.S. Cl. 324/121 E**

(73) Assignee: **ALCATEL**

(57) **ABSTRACT**

(21) Appl. No.: **10/192,549**

An eye monitor for evaluating a binary input signal of a transmission link and for recognizing the edges of an eye diagram of the input signal is described. A decision circuit is provided which is directly connected to an integrator. The input signal and a variable threshold are provided to the decision circuit. An output signal of the integrator is used to recognize the edges of the eye diagram.

(22) Filed: **Jul. 11, 2002**

(30) **Foreign Application Priority Data**

Aug. 1, 2001 (EP)..... 01 440 248.1

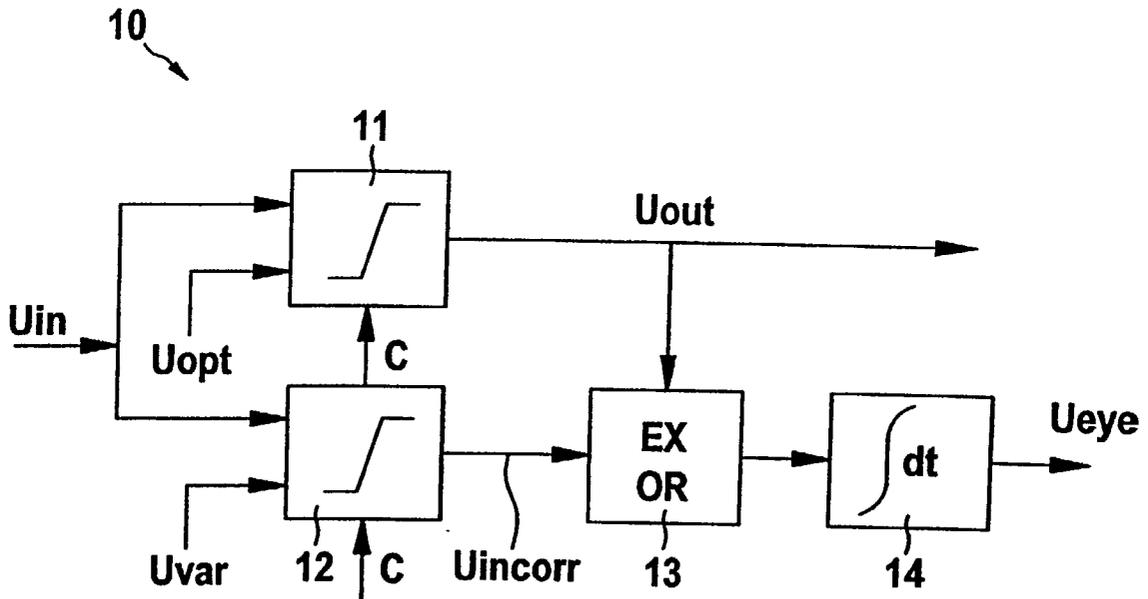


Fig. 1

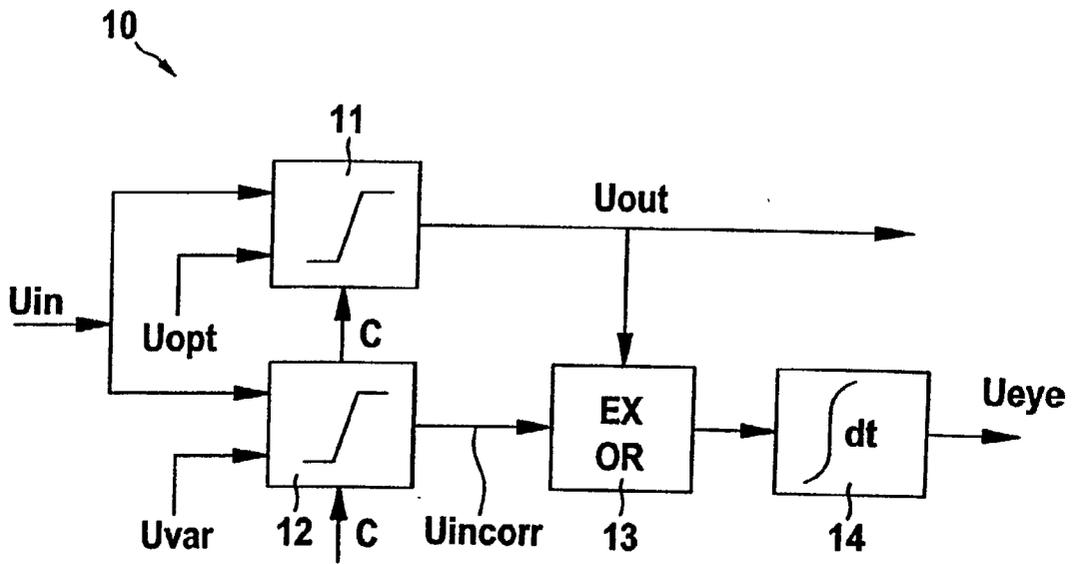


Fig. 2

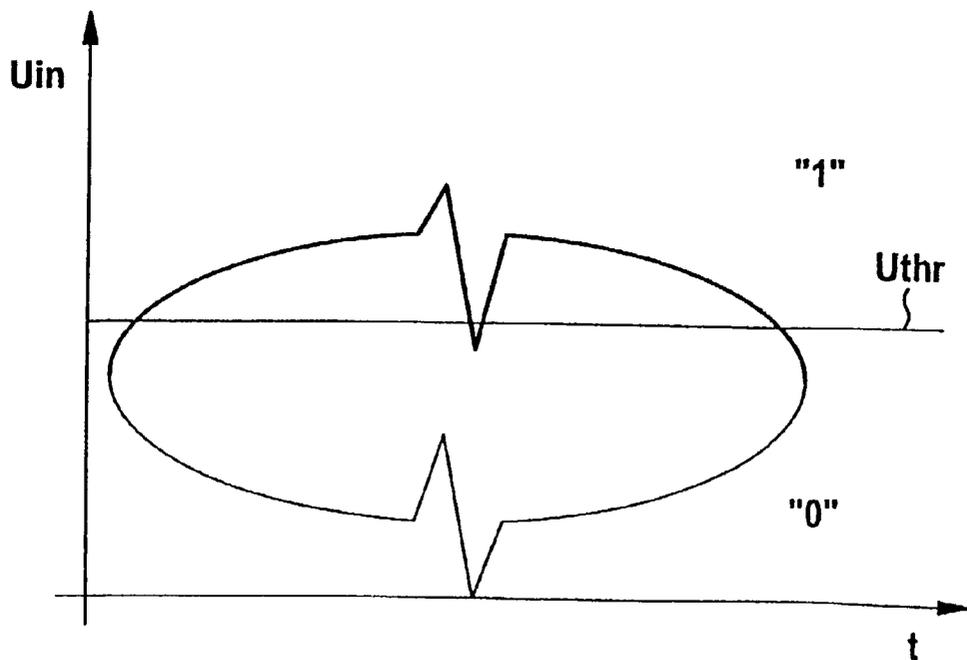


Fig. 3

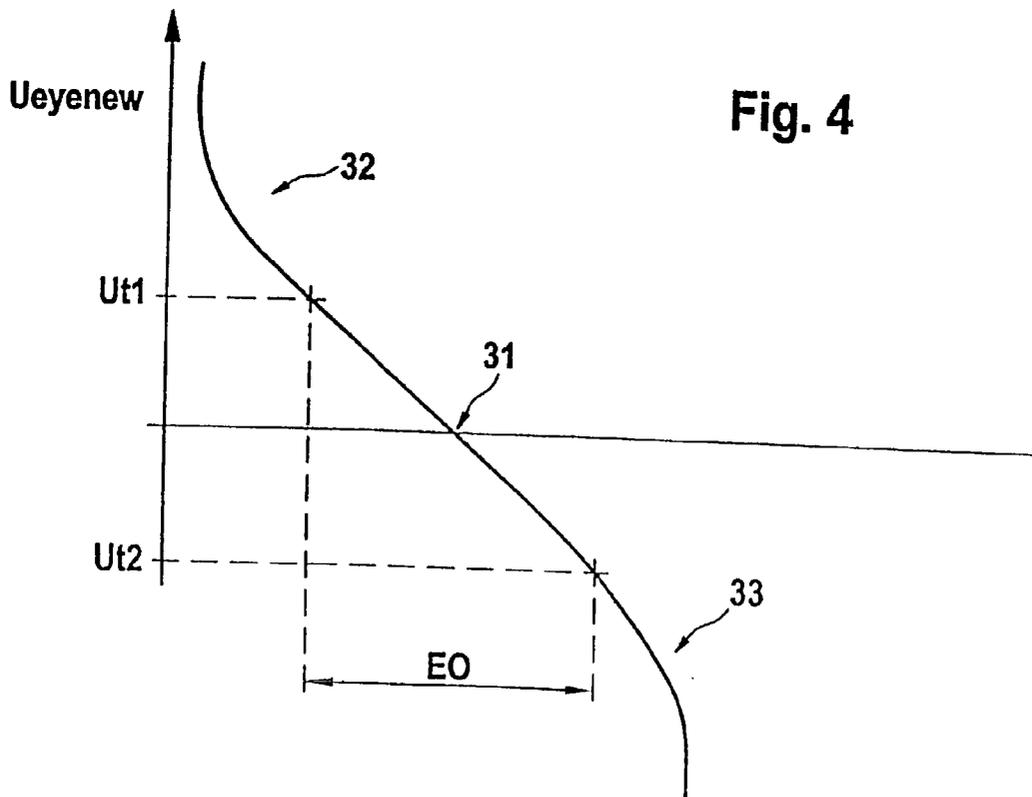
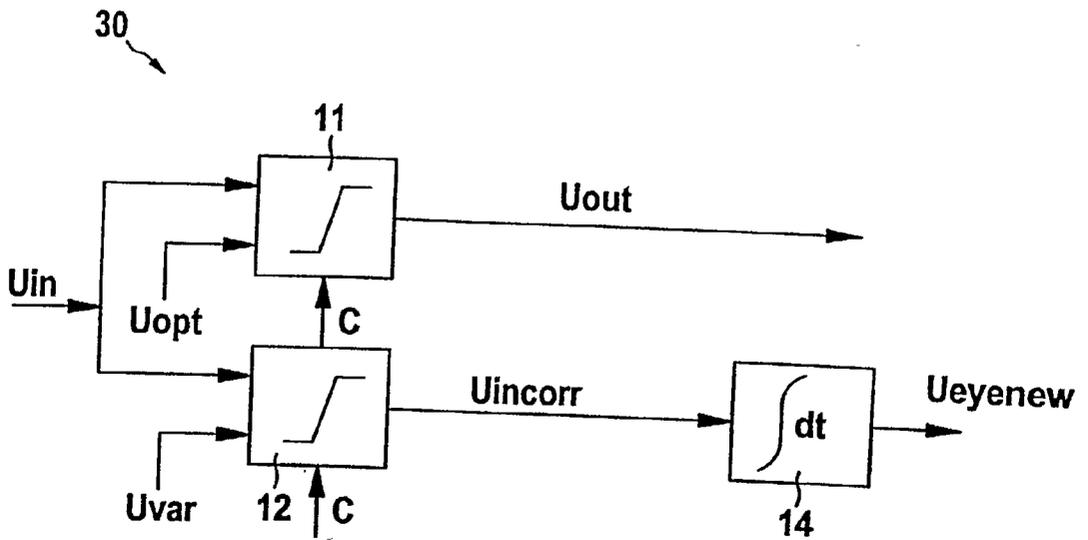


Fig. 4

EYE MONITOR

BACKGROUND OF THE INVENTION

[0001] The invention is based on a priority application EP 01 440 248.1 which is hereby incorporated by reference.

[0002] The invention relates to an eye monitor for evaluating a binary input signal of a transmission link and for recognizing the edges of an eye diagram of the input signal. The invention also relates to a corresponding receiver and to a corresponding method.

[0003] Such an eye monitor is known from H. Buelow et al., "Adaption of an electronic PMD mitigator by maximization of the eye opening", 26th European Conference on Optical Communication, Sept. 3-7, 2000, Munich, Germany, Proceedings, Volume 3, pages 209-210.

SUMMARY OF THE INVENTION

[0004] FIG. 1 shows a schematic block diagram of an eye monitor 10 as described in the above prior art document. The eye monitor 10 may be comprised in a receiver of an optical transmission system. The eye monitor 10 receives a binary input signal U_{in} of a transmission link comprising noise. Due to the noise, the received bits of the input signal U_{in} may be incorrect which is usually described with the help of a so-called eye diagram.

[0005] FIG. 2 shows a schematic eye diagram as described in the above prior art document. In FIG. 2, the input signal U_{in} is depicted over the time t . In the upper part of FIG. 2, the input signal U_{in} is a binary "1" and in the lower part, the input signal U_{in} is a binary "0". FIG. 2 also shows a threshold U_{thr} . If this threshold U_{thr} is about in the middle of the eye diagram, then it may be used to decide whether the input signal U_{in} is a binary "1" or a binary "0".

[0006] According to FIG. 1, the input signal U_{in} is forwarded to a first decision circuit 11 which is provided with an optimum threshold U_{opt} . This optimum threshold U_{opt} is located about in the middle of the eye diagram as described above. The first decision circuit 11 is therefore used to recover the received bits of the input signal U_{in} by deciding whether a binary "1" or a binary "0" was received. These recovered bits are provided by the first decision circuit 11 as an output signal U_{out} .

[0007] According to FIG. 1, the input signal U_{in} is also forwarded to a second decision circuit 12 which is provided with a variable threshold U_{var} . If the variable threshold U_{var} is about in the middle of the eye diagram, then the decision of the second decision circuit 12 is probably correct. The variable threshold U_{var} is permanently increased and decreased. If the variable threshold is at one of the edges of the eye diagram, then the decisions of the second decision circuit 12 probably become incorrect. All decisions of the second decision circuit 12 are provided as an output signal U_{incorr} .

[0008] According to FIG. 1, the output signal U_{out} of the first decision circuit 11 and the output signal U_{incorr} of the second decision circuit 12 are provided to an EXOR circuit 13. If both output signal U_{out} and U_{incorr} are identical, then the output signal of the EXOR circuit 13 is "0". However, in any other case, i.e. if the two output signals U_{out} and U_{incorr} are not identical, the output signal of the EXOR circuit 13 is "1".

[0009] According to FIG. 1, this output signal of the EXOR circuit 13 is integrated by an integrator 14 which provides an output signal U_{eye} .

[0010] As the output signal U_{incorr} of the second decision circuit 12 probably becomes incorrect at the edges of the eye diagram, the output signal of the EXOR circuit 13 probably becomes "1" at these edges. This has the consequence that the output signal U_{eye} of the integrator 14 increases at the edges of the eye diagram. Due to this change of the output signal U_{eye} , it is possible to recognize and characterize the edges of the eye diagram and to calculate a so-called eye opening.

[0011] It has to be added that the two decision circuits 11, 12 are provided with a clocking signal C which corresponds to the bit rate of the input signal U_{in} , wherein the eye monitor 10 as described above and as disclosed in the cited prior art document works with a bit rate of up to 10 Gbit/s.

[0012] The described eye monitor of FIG. 1 has the disadvantage that the EXOR circuit 13 is not able to follow bit rates above 10 Gbit/s. As a consequence, the eye monitor 10 cannot be used for a bit rate of e.g. 40 Gbit/s.

[0013] It is an object of the invention to provide an eye monitor which allows to recognize and characterize the edges of the eye diagram at bit rates which are greater than 10 Gbit/s, e.g. at a bit rate of 40 Gbit/s.

[0014] According to the invention, this object is solved by an eye monitor for evaluating a binary input signal of a transmission link and for recognizing the edges of an eye diagram of the input signal, comprising a decision circuit which is directly connected to an integrator, wherein the input signal and a variable threshold are provided to the decision circuit and wherein an output signal of the integrator is used to recognize the edges of the eye diagram.

[0015] The eye monitor of the invention does not comprise an EXOR circuit. Any bit rate restriction due to the EXOR circuit is therefore overcome. As a result, the eye monitor of the invention has the advantage that it can be used for bit rates which are greater than 10 Gbit/s, e.g. at a bit rate of 40 Gbit/s. This advantage is reached without any further electrical circuits or the like.

[0016] In an advantageous embodiment of the invention, the output signal provides at least one second value if the variable threshold is in an upper and/or a lower part of the eye diagram. This second value may then be used to characterize the eye diagram of the input signal and in particular the edges of the eye diagram. In a further particular embodiment, an eye opening is evaluated based on the second value.

[0017] Further embodiments as well as further advantages of the invention are outlined in the following description of the following figures.

[0018] FIG. 3 shows a schematic block diagram of an embodiment of an eye monitor according to the invention, and FIG. 4 shows a schematic diagram of an output signal provided by the eye monitor of FIG. 3.

[0019] FIG. 3 shows an eye monitor 30 according to the invention. The eye monitor 30 is similar to the eye monitor 10 of FIG. 1. Therefore, corresponding circuits and signals have the same reference numerals and abbreviations in both figures.

[0020] The difference between the eye monitor **30** of **FIG. 3** and the eye monitor **10** of **FIG. 1** is the fact that the eye monitor **30** of **FIG. 3** does not comprise the EXOR circuit **13** of the eye monitor **10** of **FIG. 1**. Instead, the second decision circuit **12** is directly connected to the integrator **14** so that the output signal U_{incorr} of the second decision circuit **12** is directly forwarded into the integrator **14**.

[0021] The integrator **14** then integrates this output signal U_{incorr} and provides an output signal U_{eyenew} as shown in **FIG. 4**.

[0022] As described, the variable threshold U_{var} is permanently increased and decreased.

[0023] If the variable threshold U_{var} is about in the middle of the eye diagram, then the output signal U_{incorr} is probably correct. Based on the assumption that the number of binary "1"-s and binary "0"-s of the succeeding bits of the input signal U_{in} is almost the same, the integrator **14** provides an output signal U_{eyenew} which is about Zero. This value is depicted with reference numeral **31** in **FIG. 4**.

[0024] If the variable threshold value U_{var} is e.g. in the upper part of the eye diagram, then it is probable that the second decision signal **12** decides a bit of the input signal U_{in} to be a binary "0" whereas it is actually a binary "1". As a consequence, the number of bits which are decided to be "0"-s becomes greater than the number of decided "1"-s. This results in an increase of the output signal U_{eyenew} of the integrator **14**. This increase is depicted with reference numeral **32** in **FIG. 4**.

[0025] If the variable threshold value U_{var} is in the lower part of the eye diagram, then the situation changes into the opposite. This leads to a decrease of the output signal U_{eyenew} which is depicted with reference numeral **33** in **FIG. 4**.

[0026] According to **FIG. 4**, two threshold values U_{t1} and U_{t2} are provided which are symmetrical to Zero. From the crosspoints of the output signal U_{eyenew} with these threshold values U_{t1} , U_{t2} , an eye opening EO may be evaluated. This eye opening characterizes the eye diagram of the input signal U_{in} and in particular the edges of this eye diagram.

[0027] If the quality of the transmission becomes worse, then the eye diagram of the input signal U_{in} becomes

smaller in the sense of a smaller distance between the upper and the lower edge of the eye diagram. This becomes apparent in the output signal U_{eyenew} of the eye monitor **30** of **FIG. 3** in that the output signal U_{eyenew} becomes more flat and the eye opening EO becomes smaller.

[0028] However, if the quality of the transmission is very good, then the output signal U_{eyenew} becomes more sharp in the sense of a binary course with the consequence that the eye opening EO becomes greater.

1. Eye monitor for evaluating a binary input signal of a transmission link and for recognizing the edges of an eye diagram of the input signal, comprising a decision circuit which is directly connected to an integrator, wherein the input signal and a variable threshold are provided to the decision circuit and wherein an output signal of the integrator is used to recognize the edges of the eye diagram.

2. Eye monitor of claim 1 wherein the output signal provides a first value if the variable threshold is about in the middle of the eye diagram.

3. Eye monitor of claim 1 wherein the output signal provides at least one second value if the variable threshold is in an upper and/or a lower part of the eye diagram.

4. Eye monitor of claim 3 wherein the second value is used to characterize the eye diagram of the input signal and in particular the edges of the eye diagram.

5. Eye monitor of claim 4 wherein an eye opening is evaluated based on the second value.

6. Receiver of a transmission system comprising an eye monitor for evaluating a binary input signal of a transmission link and for recognizing the edges of an eye diagram of the input signal, the eye monitor comprising a decision circuit which is directly connected to an integrator, wherein the input signal and a variable threshold are provided to the decision circuit and wherein an output signal of the integrator is used to recognize the edges of the eye diagram.

7. Method of evaluating a binary input signal of a transmission link and of recognizing the edges of an eye diagram of the input signal, wherein a decision circuit is directly connected to an integrator, and comprising the steps of providing the input signal and a variable threshold to the decision circuit and using an output signal of the integrator to recognize the edges of the eye diagram.

* * * * *