



US007003411B2

(12) **United States Patent**
Bertness

(10) **Patent No.:** **US 7,003,411 B2**
(45) **Date of Patent:** ***Feb. 21, 2006**

(54) **ELECTRONIC BATTERY TESTER WITH NETWORK COMMUNICATION**

(75) Inventor: **Kevin I. Bertness**, Batavia, IL (US)
(73) Assignee: **Midtronics, Inc.**, Willowbrook, IL (US)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
This patent is subject to a terminal disclaimer.

(21) Appl. No.: **10/914,304**

(22) Filed: **Aug. 9, 2004**

(65) **Prior Publication Data**

US 2005/0075807 A1 Apr. 7, 2005

Related U.S. Application Data

(60) Division of application No. 10/093,853, filed on Mar. 7, 2002, now Pat. No. 6,871,151, which is a continuation-in-part of application No. 10/046,659, filed on Oct. 29, 2001, now Pat. No. 6,909,287, which is a division of application No. 09/564,740, filed on May 4, 2000, now Pat. No. 6,331,762, and a continuation-in-part of application No. 09/575,627, filed on May 22, 2000, now Pat. No. 6,313,608, which is a continuation-in-part of application No. 08/962,754, filed on Nov. 3, 1997, now Pat. No. 6,081,098.
(60) Provisional application No. 60/175,762, filed on Jan. 12, 2000, provisional application No. 60/165,208, filed on Nov. 12, 1999, provisional application No. 60/132,622, filed on May 5, 1999.

(51) **Int. Cl.**
G06F 19/00 (2006.01)

(52) **U.S. Cl.** **702/63; 324/427**

(58) **Field of Classification Search** **702/63, 702/81, 108, 117; 324/427, 426; 320/106; 701/29; 370/466**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,000,665 A	5/1935	Neal	439/440
2,514,745 A	7/1950	Dalzell	324/115
3,356,936 A	12/1967	Smith	324/429
3,562,634 A	2/1971	Latner	324/427
3,593,099 A	7/1971	Scholl	320/127
3,607,673 A	9/1971	Seyl	324/425
3,652,341 A	3/1972	Halsall et al.	20/623.2
3,676,770 A	7/1972	Sharaf et al.	324/430
3,729,989 A	5/1973	Little	73/862.192
3,750,011 A	7/1973	Kreps	324/430
3,753,094 A	8/1973	Furuishi et al.	324/430
3,796,124 A	3/1974	Crosa	411/521

(Continued)

FOREIGN PATENT DOCUMENTS

DE 29 26 716 B1 1/1981

(Continued)

OTHER PUBLICATIONS

“Dynamic modelling of lead/acid batteries using impedance spectroscopy for parameter identification”, Journal of Power Sources, pp. 69-84, (1997).

(Continued)

Primary Examiner—Michael Nghiem


Assistant Examiner—Xiuqin Sun

(74) *Attorney, Agent, or Firm*—Westman, Champlin & Kelly, P.A.

(57) **ABSTRACT**

An electronic battery tester for testing a storage battery includes test circuitry configured to provide a battery test output related to a condition of the battery. A memory stores a battery tester address of the battery tester, and communication circuitry transmits the battery test output formatted with the battery tester address on a communication link to a remote location.

57 Claims, 2 Drawing Sheets

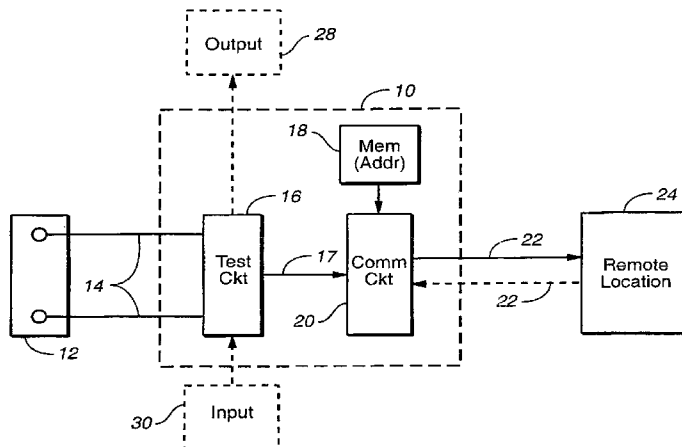

U.S. PATENT DOCUMENTS		
3,808,522 A	4/1974	Sharaf 324/430
3,811,089 A	5/1974	Strezelewicz 324/170
3,873,911 A	3/1975	Champlin 324/430
3,876,931 A	4/1975	Godshalk 324/429
3,886,443 A	5/1975	Miyakawa et al. 324/426
3,889,248 A	6/1975	Ritter 340/636
3,906,329 A	9/1975	Bader 320/134
3,909,708 A	9/1975	Champlin 324/431
3,936,744 A	2/1976	Perlmutter 324/772
3,946,299 A	3/1976	Christianson et al. 320/430
3,947,757 A	3/1976	Grube et al. 324/416
3,969,667 A	7/1976	McWilliams 324/427
3,979,664 A	9/1976	Harris 324/397
3,984,762 A	10/1976	Dowgiallo, Jr. 324/430
3,984,768 A	10/1976	Staples 324/712
3,989,544 A	11/1976	Santo 429/65
4,008,619 A	2/1977	Alcaide et al. 73/724
4,023,882 A	5/1977	Pettersson 439/426
4,024,953 A	5/1977	Nailor, III 206/344
4,047,091 A	9/1977	Hutchines et al. 363/59
4,053,824 A	10/1977	Dupuis et al. 324/434
4,056,764 A	11/1977	Endo et al. 320/101
4,070,624 A	1/1978	Taylor 324/772
4,086,531 A	4/1978	Bernier 324/772
4,112,351 A	9/1978	Back et al. 324/380
4,114,083 A	9/1978	Benham et al. 320/150
4,126,874 A	11/1978	Suzuki et al. 396/301
4,160,916 A	7/1979	Papasideris 307/10.6
4,178,546 A	12/1979	Hulls et al. 324/772
4,193,025 A	3/1980	Frailing et al. 324/427
4,207,611 A	6/1980	Gordon 324/503
4,217,645 A	8/1980	Barry et al. 702/63
4,280,457 A	7/1981	Bloxham 123/198
4,297,639 A	10/1981	Branham 324/429
4,315,204 A	2/1982	Sievers et al. 322/28
4,316,185 A	2/1982	Watrous et al. 320/116
4,322,685 A	3/1982	Frailing et al. 324/429
4,351,405 A	9/1982	Fields et al. 180/65.2
4,352,067 A	9/1982	Ottone 324/434
4,360,780 A	11/1982	Skutch, Jr. 324/437
4,381,809 A	11/1982	Bil et al. 324/426
4,363,407 A	12/1982	Barkler et al. 209/3.3
4,369,407 A	1/1983	Korbell 324/416
4,379,989 A	4/1983	Kurz et al. 320/165
4,379,990 A	4/1983	Sievers et al. 322/99
4,385,269 A	5/1983	Aspinwall et al. 320/129
4,390,828 A	6/1983	Converse et al. 320/153
4,392,101 A	7/1983	Saar et al. 320/156
4,396,880 A	8/1983	Windebank 320/156
4,408,157 A	10/1983	Beaubien 324/712
4,412,169 A	10/1983	Dell'Orto 320/123
4,423,378 A *	12/1983	Marino et al. 324/427
4,423,379 A	12/1983	Jacobs et al. 324/429
4,424,491 A	1/1984	Bobbett et al. 324/433
4,459,548 A	7/1984	Lentz et al. 324/772
4,514,694 A	4/1985	Finger 324/429
4,520,353 A	5/1985	McAuliffe 340/636
4,564,798 A	1/1986	Young 320/103
4,620,767 A	11/1986	Woolf 439/217
4,633,418 A	12/1986	Bishop 702/63
4,659,977 A	4/1987	Kissel et al. 320/150
4,663,580 A	5/1987	Wortman 320/153
4,665,370 A	5/1987	Holland 324/429
4,667,143 A	5/1987	Cooper et al. 320/153
4,667,279 A	5/1987	Maier 363/46
4,678,998 A	7/1987	Muramatsu 324/427
4,679,000 A	7/1987	Clark 324/428
4,680,528 A	7/1987	Mikami et al. 320/165
4,686,442 A	8/1987	Radomski 320/123
4,697,134 A	9/1987	Burkum et al. 320/134
4,707,795 A	11/1987	Alber et al. 702/63
4,709,202 A	11/1987	Koenck et al. 320/112
4,710,861 A	12/1987	Kanner 363/46
4,719,428 A	1/1988	Liebermann 324/436
4,723,656 A	2/1988	Kiernan et al. 206/705
4,743,855 A	5/1988	Randin et al. 324/430
4,745,349 A	5/1988	Palanisamy et al. 320/125
4,816,768 A	3/1989	Champlin 324/428
4,820,966 A	4/1989	Fridman 320/116
4,825,170 A	4/1989	Champlin 324/436
4,847,547 A	7/1989	Eng, Jr. et al. 320/153
4,849,700 A	7/1989	Morioka et al. 324/427
4,874,679 A	10/1989	Miyagawa 429/91
4,876,495 A	10/1989	Palanisamy et al. 320/106
4,881,038 A	11/1989	Champlin 324/426
4,888,716 A	12/1989	Ueno 702/63
4,912,416 A	3/1990	Champlin 324/430
4,913,116 A	4/1990	Katogi et al. 123/406.32
4,926,330 A	5/1990	Abe et al. 364/424.03
4,929,931 A	5/1990	McCuen 340/636
4,931,738 A	6/1990	MacIntyre et al. 324/435
4,933,845 A	6/1990	Hayes 710/104
4,934,957 A	6/1990	Bellusci 439/504
4,937,528 A	6/1990	Palanisamy 324/430
4,947,124 A	8/1990	Hauser 324/430
4,949,046 A	8/1990	Seyfang 324/427
4,956,597 A	9/1990	Heavey et al. 320/129
4,968,941 A	11/1990	Rogers 324/428
4,968,942 A	11/1990	Palanisamy 324/430
5,004,979 A	4/1991	Marino et al. 324/160
5,032,825 A	7/1991	Xuznicki 340/636
5,037,778 A	8/1991	Stark et al. 437/216
5,047,722 A	9/1991	Wurst et al. 324/430
5,081,565 A	1/1992	Nabha et al. 362/465
5,087,881 A	2/1992	Peacock 324/378
5,095,223 A	3/1992	Thomas 307/110
5,108,320 A	4/1992	Kimber 439/883
5,126,675 A	6/1992	Yang 324/435
5,140,269 A	8/1992	Champlin 324/433
5,144,218 A	9/1992	Bosscha 320/139
5,144,248 A	9/1992	Alexandres et al. 324/428
5,159,272 A	10/1992	Rao et al. 324/429
5,160,881 A	11/1992	Schramm et al. 322/7
5,170,124 A	12/1992	Blair et al. 324/434
5,179,335 A	1/1993	Nor 320/159
5,194,799 A	3/1993	Tomantschger 320/103
5,204,611 A	4/1993	Nor et al. 320/145
5,214,370 A	5/1993	Harm et al. 320/152
5,214,385 A	5/1993	Gabriel et al. 324/434
5,241,275 A	8/1993	Fang 324/430
5,254,952 A	10/1993	Salley et al. 324/429
5,266,880 A	11/1993	Newland 320/125
5,281,919 A	1/1994	Palanisamy 324/427
5,281,920 A	1/1994	Wurst 324/430
5,295,078 A	3/1994	Stich et al. 320/136
5,298,797 A	3/1994	Redl 327/387
5,300,874 A	4/1994	Shimamoto et al. 320/106
5,302,902 A	4/1994	Groehl 324/434
5,313,152 A	5/1994	Wozniak et al. 320/118
5,315,287 A	5/1994	Sol 340/455
5,321,626 A	6/1994	Palladino 702/63
5,321,627 A	6/1994	Reher 364/483
5,323,337 A	6/1994	Wilson et al. 364/574
5,325,041 A	6/1994	Briggs 320/149
5,331,268 A	7/1994	Patino et al. 320/158
5,336,993 A	8/1994	Thomas et al. 324/158.1
5,338,515 A	8/1994	Dalla Betta et al. 422/95
5,339,018 A	8/1994	Brokaw 320/147
5,343,380 A	8/1994	Champlin 363/46
5,347,163 A	9/1994	Yoshimura 307/66
5,352,968 A	10/1994	Reni et al. 320/136
5,357,519 A	10/1994	Martin et al. 371/15.1
5,365,160 A	11/1994	Leppo et al. 320/160
5,365,453 A	11/1994	Startup et al. 320/136

5,369,364 A	11/1994	Renirie et al.	324/430	5,780,974 A	7/1998	Pabla et al.	315/82
5,381,096 A	1/1995	Hirzel	324/427	5,780,980 A	7/1998	Naito	318/139
5,410,754 A *	4/1995	Klotzbach et al.	370/466	5,789,899 A	8/1998	van Phuoc et al.	320/112
5,412,308 A	5/1995	Brown	323/267	5,793,359 A	8/1998	Ushikubo	345/169
5,412,323 A	5/1995	Kato et al.	324/429	5,796,239 A	8/1998	van Phuoc et al.	320/107
5,426,371 A	6/1995	Salley et al.	324/429	5,808,469 A	9/1998	Kopera	324/434
5,426,416 A	6/1995	Jefferies et al.	340/664	5,818,234 A	10/1998	McKinnon	324/433
5,432,025 A	7/1995	Cox	429/65	5,821,756 A	10/1998	McShane et al.	324/430
5,432,426 A	7/1995	Yoshida	320/160	5,821,757 A	10/1998	Alvarez et al.	324/434
5,434,495 A	7/1995	Toko	320/135	5,825,174 A	10/1998	Parker	324/106
5,435,185 A	7/1995	Eagan	73/587	5,831,435 A *	11/1998	Troy	324/426
5,442,274 A	8/1995	Tamai	320/146	5,850,113 A	12/1998	Weimer et al.	307/125
5,445,026 A	8/1995	Eagan	73/591	5,862,515 A	1/1999	Kobayashi et al.	702/63
5,449,996 A	9/1995	Matsumoto et al.	320/148	5,865,638 A	2/1999	Trafton	439/288
5,449,997 A	9/1995	Gilmore et al.	320/148	5,872,443 A	2/1999	Williamson	320/160
5,451,881 A	9/1995	Finger	324/433	5,872,453 A	2/1999	Shimoyama et al.	324/431
5,453,027 A	9/1995	Buell et al.	439/433	5,895,440 A	4/1999	Proctor et al.	702/63
5,457,377 A	10/1995	Jonsson	320/DIG. 21	5,912,534 A	6/1999	Benedict	315/82
5,469,043 A	11/1995	Cherng et al.	320/161	5,914,605 A	6/1999	Bertness	324/430
5,485,090 A	1/1996	Stephens	324/433	5,927,938 A	7/1999	Hammerslag	414/809
5,488,300 A	1/1996	Jamieson	324/432	5,929,609 A	7/1999	Joy et al.	322/25
5,519,383 A	5/1996	De La Rosa	340/636	5,939,855 A	8/1999	Proctor et al.	320/104
5,528,148 A	6/1996	Rogers	320/137	5,939,861 A	8/1999	Joko et al.	320/122
5,537,967 A	7/1996	Tashiro et al.	123/192.1	5,945,829 A	8/1999	Bertness	324/430
5,541,489 A	7/1996	Dunstan	320/134	5,951,229 A	9/1999	Hammerslag	414/398
5,546,317 A	8/1996	Andrieu	702/63	5,961,561 A	10/1999	Wakefield, II	701/29
5,548,273 A	8/1996	Nicol et al.	340/439	5,961,604 A	10/1999	Anderson et al.	709/229
5,550,485 A	8/1996	Falk	324/772	5,969,625 A	10/1999	Russo	340/636.19
5,561,380 A	10/1996	Sway-Tin et al.	324/509	5,978,805 A	11/1999	Carson	707/10
5,562,501 A	10/1996	Kinoshita et al.	439/852	5,982,138 A	11/1999	Krieger	320/105
5,563,496 A	10/1996	McClure	320/128	6,002,238 A	12/1999	Champlin	320/134
5,572,136 A	11/1996	Champlin	324/426	6,005,759 A	12/1999	Hart et al.	361/66
5,574,355 A	11/1996	McShane et al.	320/161	6,008,652 A	12/1999	Theofanopoulos et al. .	324/434
5,578,915 A	11/1996	Crouch, Jr. et al.	324/428	6,009,369 A	12/1999	Boisvert et al.	701/99
5,583,416 A	12/1996	Klang	320/160	6,016,047 A	1/2000	Notten et al.	320/137
5,585,728 A *	12/1996	Champlin	324/427	6,031,354 A	2/2000	Wiley et al.	320/116
5,589,757 A	12/1996	Klang	320/160	6,031,368 A	2/2000	Klippel et al.	324/133
5,592,093 A	1/1997	Klingbiel	324/426	6,037,751 A	3/2000	Klang	320/160
5,592,094 A	1/1997	Ichikawa	324/427	6,037,777 A	3/2000	Champlin	324/430
5,596,260 A	1/1997	Moravec et al.	320/135	6,037,778 A	3/2000	Makhija	324/433
5,598,098 A	1/1997	Champlin	324/430	6,046,514 A	4/2000	Rouillard et al.	307/77
5,602,462 A	2/1997	Stich et al.	323/258	6,051,976 A *	4/2000	Bertness	324/426
5,606,242 A	2/1997	Hull et al.	320/106	6,055,468 A *	4/2000	Kaman et al.	701/29
5,614,788 A	3/1997	Mullins et al.	315/82	6,061,638 A *	5/2000	Joyce	702/63
5,621,298 A	4/1997	Harvey	320/134	6,064,372 A	5/2000	Kahkoska	345/173
5,633,985 A	5/1997	Severson et al.	704/267	6,072,299 A	6/2000	Kurie et al.	320/112
5,637,978 A	6/1997	Kellett et al.	320/104	6,072,300 A	6/2000	Tsuji	320/116
5,642,031 A	6/1997	Brotto	320/152	6,081,098 A	6/2000	Bertness et al.	320/134
5,650,937 A	7/1997	Bounaga	702/6	6,081,109 A	6/2000	Seymour et al.	324/127
5,652,501 A	7/1997	McClure et al.	320/118	6,091,238 A	7/2000	McDermott	324/207.2
5,653,659 A	8/1997	Kunibe et al.	477/111	6,091,245 A	7/2000	Bertness	324/426
5,654,623 A *	8/1997	Shiga et al.	320/106	6,094,033 A	7/2000	Ding et al.	320/132
5,656,920 A	8/1997	Cherng et al.	320/161	6,100,670 A	8/2000	Levesque	320/150
5,661,368 A	8/1997	Deol et al.	315/82	6,104,167 A	8/2000	Bertness et al.	320/132
5,675,234 A	10/1997	Greene	320/DIG. 18	6,114,834 A	9/2000	Parise	320/109
5,677,077 A	10/1997	Faulk	429/90	6,137,269 A	10/2000	Champlin	320/150
5,699,050 A	12/1997	Kanazawa	340/636	6,140,797 A	10/2000	Dunn	320/105
5,701,089 A	12/1997	Perkins	324/772	6,144,185 A	11/2000	Dougherty et al.	320/132
5,705,929 A	1/1998	Caravello et al.	324/430	6,150,793 A	11/2000	Lesesky et al.	320/104
5,707,015 A	1/1998	Guthrie	241/120	6,158,000 A	12/2000	Collins	713/1
5,710,503 A	1/1998	Sideris et al.	320/116	6,161,640 A	12/2000	Yamaguchi	180/65.8
5,711,648 A	1/1998	Hammerslag	414/800	6,163,156 A	12/2000	Bertness	324/426
5,717,336 A	2/1998	Basell et al.	324/430	6,167,349 A	12/2000	Alvarez	702/63
5,717,937 A	2/1998	Fritz	320/128	6,172,483 B1	1/2001	Champlin	320/134
5,739,667 A	4/1998	Matsuda et al.	320/128	6,172,505 B1	1/2001	Bertness	324/430
5,745,044 A	4/1998	Hyatt, Jr. et al.	340/5.23	6,181,545 B1	1/2001	Amatucci et al.	361/502
5,747,909 A	5/1998	Syverson et al.	310/156.56	6,211,651 B1	4/2001	Nemoto	320/133
5,747,967 A	5/1998	Muljadi et al.	320/148	6,215,275 B1	4/2001	Bean	320/106
5,754,417 A	5/1998	Nicollini	363/60	6,222,342 B1	4/2001	Eggert et al.	320/105
5,757,192 A	5/1998	McShane et al.	324/427	6,222,369 B1	4/2001	Champlin	324/430
5,760,587 A	6/1998	Harvey	324/434	D442,503 S	5/2001	Lundbeck et al.	D10/77
5,772,468 A	6/1998	Kowalski et al.	439/506	6,225,808 B1	5/2001	Varghese et al.	324/426
5,773,978 A	6/1998	Becker	324/430	6,236,332 B1	5/2001	Conkright et al.	340/3.1

6,238,253 B1	5/2001	Qualls	439/759	6,806,716 B1	10/2004	Bertness et al.	324/426
6,242,887 B1	6/2001	Burke	320/104	2002/0010558 A1	1/2002	Bertness et al.	702/63
6,249,124 B1	6/2001	Bertness	324/426	2002/0030495 A1	3/2002	Kechmire	324/427
6,250,973 B1	6/2001	Lowery et al.	439/763	2002/0050163 A1	5/2002	Makhija et al.	73/116
6,254,438 B1	7/2001	Gaunt	439/755	2002/0171428 A1	11/2002	Bertness	324/426
6,259,170 B1	7/2001	Limoge et al.	307/10.8	2002/0176010 A1	11/2002	Wallach et al.	348/362
6,259,254 B1	7/2001	Klang	324/427	2003/0025481 A1	2/2003	Bertness	324/427
6,262,563 B1	7/2001	Champlin	320/134	2003/0036909 A1	2/2003	Kato	704/275
6,263,268 B1	7/2001	Nathanson	701/29	2003/0184262 A1	10/2003	Makhija	320/107
6,271,643 B1	8/2001	Becker et al.	320/112	2003/0184306 A1	10/2003	Bertness et al.	324/426
6,275,008 B1	8/2001	Arai et al.	320/132	2003/0194672 A1	10/2003	Roberts et al.	431/196
6,294,896 B1	9/2001	Champlin	320/134	2004/0000590 A1	1/2004	Raichle et al.	235/462.01
6,294,897 B1	9/2001	Champlin	320/153	2004/0000891 A1	1/2004	Raichle et al.	320/107
6,304,087 B1	10/2001	Bertness	324/426	2004/0000893 A1	1/2004	Raichle et al.	320/135
6,307,349 B1	10/2001	Koenck et al.	320/112	2004/0000913 A1	1/2004	Raichle et al.	324/426
6,310,481 B1	10/2001	Bertness	324/430	2004/0000915 A1	1/2004	Raichle et al.	324/522
6,313,607 B1	11/2001	Champlin	320/132	2004/0002824 A1	1/2004	Raichle et al.	702/63
6,313,608 B1	11/2001	Varghese et al.	32/132	2004/0002825 A1	1/2004	Raichle et al.	702/63
6,316,914 B1	11/2001	Bertness	320/134	2004/0002836 A1	1/2004	Raichle et al.	702/188
6,323,650 B1	11/2001	Bertness et al.	324/426	2004/0049361 A1	3/2004	Hamdan et al.	702/115
6,329,793 B1	12/2001	Bertness et al.	320/132	2004/0051533 A1	3/2004	Namaky	324/426
6,331,762 B1	12/2001	Bertness	320/134	2004/0054503 A1	3/2004	Namaky	702/183
6,332,113 B1	12/2001	Bertness	702/63				
6,346,795 B1	2/2002	Haraguchi et al.	320/136				
6,347,958 B1	2/2002	Tsai	439/488				
6,351,102 B1	2/2002	Troy	320/139				
6,356,042 B1	3/2002	Kahlon et al.	318/138				
6,359,441 B1	3/2002	Bertness	324/426				
6,359,442 B1	3/2002	Henningson et al.	324/426				
6,363,303 B1	3/2002	Bertness	701/29				
RE37,677 E	4/2002	Irie	315/83				
6,384,608 B1	5/2002	Namaky	324/430				
6,388,448 B1	5/2002	Cervas	324/426				
6,392,414 B1	5/2002	Bertness	324/429				
6,396,278 B1	5/2002	Makhija	324/402				
6,411,098 B1	6/2002	Laletin	324/436				
6,417,669 B1	7/2002	Champlin	324/426				
6,424,157 B1	7/2002	Gollomp et al.	324/430				
6,424,158 B1	7/2002	Klang	324/433				
6,441,585 B1	8/2002	Bertness	320/132				
6,445,158 B1	9/2002	Bertness et al.	320/104				
6,449,726 B1	9/2002	Smith	713/340				
6,456,045 B1	9/2002	Troy et al.	320/139				
6,466,025 B1	10/2002	Klang	324/429				
6,466,026 B1	10/2002	Champlin	324/430				
6,495,990 B1	12/2002	Champlin	320/132				
6,526,361 B1	2/2003	Jones et al.	702/63				
6,531,848 B1	3/2003	Chitsazan et al.	320/153				
6,534,993 B1	3/2003	Bertness	324/426				
6,544,078 B1	4/2003	Palmisano et al.	439/762				
6,556,019 B1	4/2003	Bertness	324/426				
6,566,883 B1	5/2003	Vonderhaar et al.	324/426				
6,570,385 B1	5/2003	Roberts et al.	324/378				
6,586,941 B1	7/2003	Bertness et al.	324/426				
6,597,150 B1	7/2003	Bertness et al.	320/104				
6,600,815 B1	7/2003	Walding	379/93.07				
6,618,644 B1	9/2003	Bean	700/231				
6,621,272 B1	9/2003	Champlin	324/426				
6,623,314 B1	9/2003	Cox et al.	439/759				
6,628,011 B1	9/2003	Droppo et al.	307/43				
6,629,054 B1	9/2003	Makhija et al.	702/113				
6,633,165 B1	10/2003	Bertness	324/426				
6,667,624 B1	12/2003	Raichle et al.	324/522				
6,679,212 B1	1/2004	Kelling	123/179.28				
6,696,819 B1	2/2004	Bertness	320/134				
6,707,303 B1	3/2004	Bertness et al.	324/426				
6,737,831 B1	5/2004	Champlin	320/132				
6,759,849 B1	7/2004	Bertness	324/426				
6,777,945 B1	8/2004	Roberts et al.	324/426				
6,781,382 B1	8/2004	Johnson	324/426				
6,788,025 B1	9/2004	Bertness et al.	320/104				
6,795,782 B1	9/2004	Bertness et al.	702/63				
6,805,090 B1	10/2004	Bertness et al.	123/198				

FOREIGN PATENT DOCUMENTS

EP	0 022 450	A1	1/1981
EP	0 637 754	A1	2/1995
EP	0 772 056	A1	5/1997
FR	2 749 397		12/1997
GB	2 029 586		3/1980
GB	2 088 159	A	6/1982
GB	2 246 916	A	10/1990
GB	2 387 235	A	10/2003
JP	59-17892		1/1984
JP	59-17893		1/1984
JP	59-17894		1/1984
JP	59017894		1/1984
JP	59215674		12/1984
JP	60225078		11/1985
JP	62-180284		8/1987
JP	63027776		2/1988
JP	03274479		12/1991
JP	03282276		12/1991
JP	4-8636		1/1992
JP	04095788		3/1992
JP	04131779		5/1992
JP	04372536		12/1992
JP	5216550		8/1993
JP	7-128414		5/1995
JP	09061505		3/1997
JP	10056744		2/1998
JP	10232273		9/1998
JP	11103503	A	4/1999
RU	2089015	C1	8/1997
WO	WO 93/22666		11/1993
WO	WO 94/05069		3/1994
WO	WO 97/44652		11/1997
WO	WO 98/04910		2/1998
WO	WO 98/58270		12/1998
WO	WO 99/23738		5/1999
WO	WO 00/16083		3/2000
WO	WO 00/62049		10/2000
WO	WO 00/67359		11/2000
WO	WO 01/59443		2/2001
WO	WO 00/16614	A1	3/2001
WO	WO 00/16615	A1	3/2001
WO	WO 01/51947		7/2001

OTHER PUBLICATIONS

“A review of impedance measurements for determination of the state-of-charge or state-of-health of secondary batteries”, Journal of Power Sources, pp. 59-69, (1998).

- “Improved Impedance Spectroscopy Technique For Status Determination of Production Li/SO₂ Batteries” Terrill Atwater et al., pp. 10-113, (1992).
- “Search Report Under Section 17” for Great Britain Application No. GB0421447.4. (Jan. 28, 2005).
- “Results of Discrete Frequency Immittance Spectroscopy (DFIS) Measurements of Lead Acid Batteries”, by K.S. Champlin et al., *Proceedings of 23rd International Teleco Conference (INTELEC)*, published Oct. 2001, IEE, pp. 433-440.
- “Examination Report” from the U.K. Patent Office for U.K. App. No. 0417678.0, 2005.
- “Electrochemical Impedance Spectroscopy in Battery Development and Testing”, *Batteries International*, Apr. 1997, pp. 59 and 62-63.
- “Battery Impedance”, by E. Willihnganz et al., *Electrical Engineering*, Sep. 1959, pp. 922-925.
- “Determining The End of Battery Life”, by s. DeBardelaben, *IEEE*, 1986, pp.,365-368.
- “A Look at the Impedance of a Cell”, by S. Debardelaben, *IEEE*, 1988, pp. 394-397.
- “The Impedance of Electrical Storage Cells”, by N.A. Hampson et al., *Journal of Applied Electrochemistry*, 1980, pp. 3-11.
- “A Packagae for Impedance/Admittance Data Analysis”, by B. Boukamp, *Solid State Ionics*, 1986, pp. 136-140.
- “Precision of Impedance Spectroscopy Estimates of Bulk, Reaction Rate, and Diffusion Parameters”, by J. Macdonald et al., *J. Electroanal, Chem.*, 1991, pp. 1-11.
- Internal Resistance: Harbinger of Capacity Loss in Starved Electrolyte Sealed Lead Acid Batteries, by Vaccaro, F.J. et al., *AT&T Bell Laboratories*, 1987 IEEE, Ch. 2477, pp. 128,131.
- IEEE Recommended Practice For Maintenance, Testings, and Replacement of Large Lead Storage Batteries for Generating Stations and Substations, *The Institute of Electrical and Electronics Engineers, Inc., ANSI/IEEE Std. 450-1987*, Mar. 9, 1987, pp. 7-15.
- “Field and Laboratory Studies to Assess the State of Health of Valve-Regulated Lead Acid Batteries: Part I Conductance/Capacity Correlation Studies”, by D. Feder et al., *IEEE*, Aug. 1992, pp. 218-233.
- “Battery Impedance”, by E. Willihnganz et al., *Electrical Engineering*, Sep. 1959, pp. 922-925.
- “JIS Japanese Industrial Standard-Lead Acid Batteries for Automobiles”, *Japanese Standards Association UDC*, 621.355.2:629.113.006, Nov. 1995.
- “Performance of Dry Cells”, by C. Hambuechen, Preprint of *Am. Electrochem. Soc.*, Apr. 18-20, 1912, paper No. 19, pp. 1-5.
- “A Bridge for Measuring Storage Battery Resistance”, by E. Willihncanz, *The Electrochemical Society*, preprint 79-20, Apr. 1941, pp. 253-258.
- National Semiconductor Corporation, “High Q Notch Filter”, Mar. 1969, Linear Brief 5.
- Burr-Brown Corporation, “Design A 60 Hz Notch Filter with the UAF42”, Jan. 1994, AB-071, 1994.
- National Semiconductor Corporation, “LMF90-4th-Order Elliptic Notch Filter”, Dec. 1994, RRD-B30M115.
- “Notification of Transmittal of The International Search Report or the Declaration”, PCT/US03/06577, May 3, 2003.
- “Notification of Transmittal of The International Search Report or the Declaration”, PCT/US03/07837, Mar. 14, 2003.
- “Notification of Transmittal of The International Search Report or the Declaration”, PCT/US03/41561, Dec. 30, 2003.
- “Notification of Transmittal of The International Search Report or the Declaration”, PCT/US03/27696, Sep. 4, 2003.
- “Programming Training Course, 62-000 Series Smart Engine Analyzer”, Testproducts Division, Kalamazoo, Michigan, pp. 1-207, (1984).
- “Operators Manual, Modular Computer Analyzer Model MCA 3000”, Sun Electric Corporation, Crystal Lake, Illinois, pp. 1-1-14-13, (1991).
- Supplementary European Search Report Communication for Appl. No. 99917402.2 Aug. 26, 2004.
- * cited by examiner

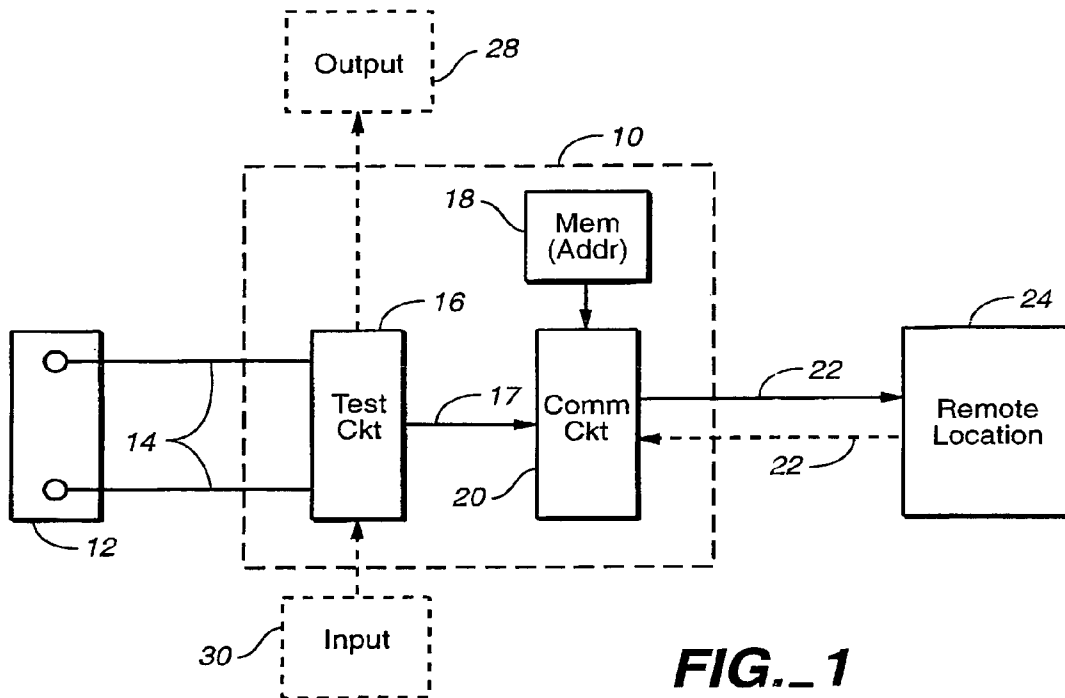


FIG. 1



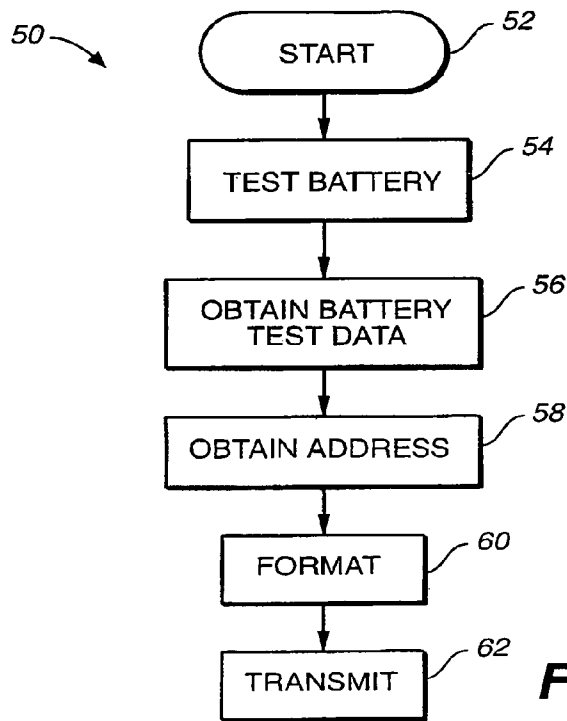


FIG. 2

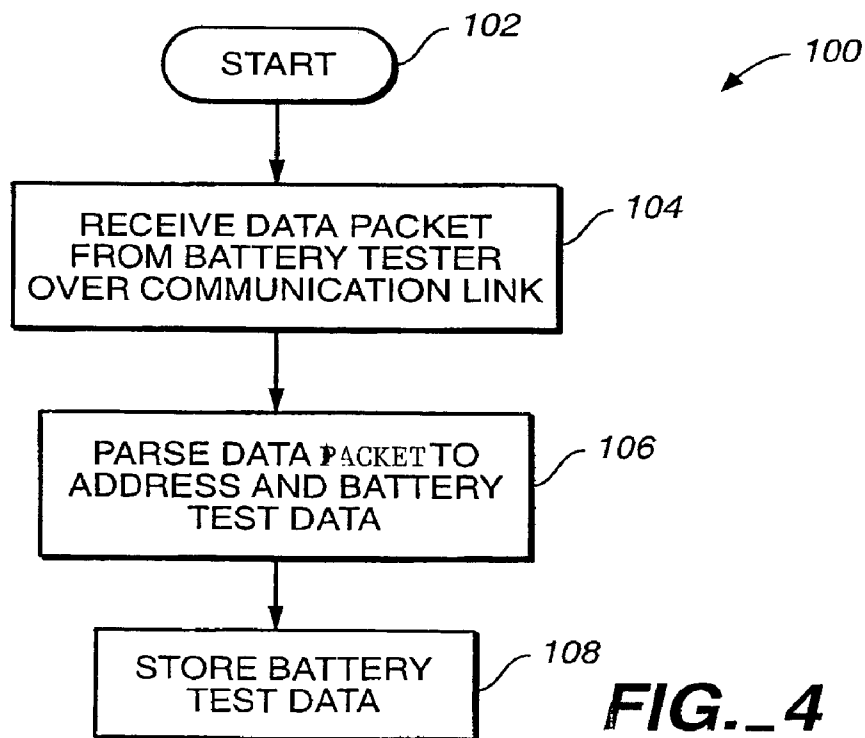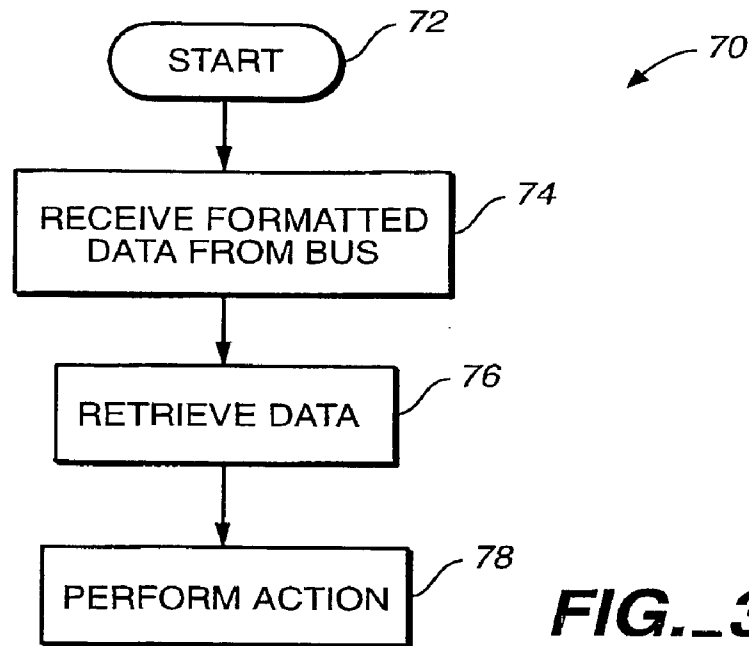

ELECTRONIC BATTERY TESTER WITH NETWORK COMMUNICATION

The present application is a Divisional of U.S. Ser. No. 10/093,853, filed Mar. 7, 2002 now U.S. Pat. No. 6,871,151, which is a Continuation-In-Part of and claims priority of U.S. Ser. No. 10/046,659, filed Oct. 29, 2001 now U.S. Pat. No. 6,909,287, which is a Divisional of Ser. No. 09/564,740, filed May 4, 2000, now U.S. Pat. No. 6,331,762, which is a Continuation-In-Part of application Ser. No. 08/962,754, filed Nov. 3, 1997, now U.S. Pat. No. 6,081,098 and also a Continuation-In-Part of application Ser. No. 09/575,627, filed May 22, 2000 now U.S. Pat. No. 6,313,608, which is a Continuation-In-Part of application Ser. No. 08/962,754, filed Nov. 3, 1997, now U.S. Pat. No. 6,081,098 and also claims priority to Provisional Application Ser. No. 60/132,622, filed May 5, 1999, U.S. Provisional Application No. 60/165,208, filed Nov. 12, 1999, and Provisional Application Ser. No. 60/175,762, filed Jan. 12, 2000, and entitled ENERGY MANAGEMENT SYSTEM FOR AUTOMOTIVE VEHICLE, the contents of which are hereby incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

The present invention relates to electronic battery testers of the type used to perform tests on storage batteries.

Electronic battery testers are used to test and determine the condition of storage batteries. Examples of electronic battery testers and related technologies are shown in U.S. Pat. No. 3,873,911, issued Mar. 25, 1975, to Champlin, entitled ELECTRONIC BATTERY TESTING DEVICE; U.S. Pat. No. 3,909,708, issued Sep. 30, 1975, to Champlin, entitled ELECTRONIC BATTERY TESTING DEVICE; U.S. Pat. No. 4,816,768, issued Mar. 28, 1989, to Champlin, entitled ELECTRONIC BATTERY TESTING DEVICE; U.S. Pat. No. 4,825,170, issued Apr. 25, 1989, to Champlin, entitled ELECTRONIC BATTERY TESTING DEVICE WITH AUTOMATIC VOLTAGE SCALING; U.S. Pat. No. 4,881,038, issued Nov. 14, 1989, to Champlin, entitled ELECTRONIC BATTERY TESTING DEVICE WITH AUTOMATIC VOLTAGE SCALING TO DETERMINE DYNAMIC CONDUCTANCE; U.S. Pat. No. 4,912,416, issued Mar. 27, 1990, to Champlin, entitled ELECTRONIC BATTERY TESTING DEVICE WITH STATE-OF-CHARGE COMPENSATION; U.S. Pat. No. 5,140,269, issued Aug. 18, 1992, to Champlin, entitled ELECTRONIC TESTER FOR ASSESSING BATTERY/CELL CAPACITY; U.S. Pat. No. 5,343,380, issued Aug. 30, 1994, entitled METHOD AND APPARATUS FOR SUPPRESSING TIME VARYING SIGNALS IN BATTERIES UNDERGOING CHARGING OR DISCHARGING; U.S. Pat. No. 5,572,136, issued Nov. 5, 1996, entitled ELECTRONIC BATTERY TESTER WITH AUTOMATIC COMPENSATION FOR LOW STATE-OF-CHARGE; U.S. Pat. No. 5,574,355, issued Nov. 12, 1996, entitled METHOD AND APPARATUS FOR DETECTION AND CONTROL OF THERMAL RUNAWAY IN A BATTERY UNDER CHARGE; U.S. Pat. No. 5,585,416, issued Dec. 10, 1996, entitled APPARATUS AND METHOD FOR STEP-CHARGING BATTERIES TO OPTIMIZE CHARGE ACCEPTANCE; U.S. Pat. No. 5,585,728, issued Dec. 17, 1996, entitled ELECTRONIC BATTERY TESTER WITH AUTOMATIC COMPENSATION FOR LOW STATE-OF-CHARGE; U.S. Pat. No. 5,589,757, issued Dec. 31, 1996, entitled APPARATUS AND METHOD FOR STEP-CHARGING BATTERIES TO OPTIMIZE CHARGE ACCEPTANCE; U.S. Pat. No. 5,592,

093, issued Jan. 7, 1997, entitled ELECTRONIC BATTERY TESTING DEVICE LOOSE TERMINAL CONNECTION DETECTION VIA A COMPARISON CIRCUIT; U.S. Pat. No. 5,598,098, issued Jan. 28, 1997, entitled ELECTRONIC BATTERY TESTER WITH VERY HIGH NOISE IMMUNITY; U.S. Pat. No. 5,656,920, issued Aug. 12, 1997, entitled METHOD FOR OPTIMIZING THE CHARGING LEAD-ACID BATTERIES AND AN INTERACTIVE CHARGER; U.S. Pat. No. 5,757,192, issued May 26, 1998, entitled METHOD AND APPARATUS FOR DETECTING A BAD CELL IN A STORAGE BATTERY; U.S. Pat. No. 5,821,756, issued Oct. 13, 1998, entitled ELECTRONIC BATTERY TESTER WITH TAILORED COMPENSATION FOR LOW STATE-OF-CHARGE; U.S. Pat. No. 5,831,435, issued Nov. 3, 1998, entitled BATTERY TESTER FOR JIS STANDARD; U.S. Pat. No. 5,914,605, issued Jun. 22, 1999, entitled ELECTRONIC BATTERY TESTER; U.S. Pat. No. 5,945,829, issued Aug. 31, 1999, entitled MIDPOINT BATTERY MONITORING; U.S. Pat. No. 6,002,238, issued Dec. 14, 1999, entitled METHOD AND APPARATUS FOR MEASURING COMPLEX IMPEDANCE OF CELLS AND BATTERIES; U.S. Pat. No. 6,037,751, issued Mar. 14, 2000, entitled APPARATUS FOR CHARGING BATTERIES; U.S. Pat. No. 6,037,777, issued Mar. 14, 2000, entitled METHOD AND APPARATUS FOR DETERMINING BATTERY PROPERTIES FROM COMPLEX IMPEDANCE/ADMITTANCE; U.S. Pat. No. 6,051,976, issued Apr. 18, 2000, entitled METHOD AND APPARATUS FOR AUDITING A BATTERY TEST; U.S. Pat. No. 6,081,098, issued Jun. 27, 2000, entitled METHOD AND APPARATUS FOR CHARGING A BATTERY; U.S. Pat. No. 6,091,245, issued Jul. 18, 2000, entitled METHOD AND APPARATUS FOR AUDITING A BATTERY TEST; U.S. Pat. No. 6,104,167, issued Aug. 15, 2000, entitled METHOD AND APPARATUS FOR CHARGING A BATTERY; U.S. Pat. No. 6,137,269, issued Oct. 24, 2000, entitled METHOD AND APPARATUS FOR ELECTRONICALLY EVALUATING THE INTERNAL TEMPERATURE OF AN ELECTROCHEMICAL CELL OR BATTERY; U.S. Pat. No. 6,163,156, issued Dec. 19, 2000, entitled ELECTRICAL CONNECTION FOR ELECTRONIC BATTERY TESTER; U.S. Pat. No. 6,172,483, issued Jan. 9, 2001, entitled METHOD AND APPARATUS FOR MEASURING COMPLEX IMPEDANCE OF CELL AND BATTERIES; U.S. Pat. No. 6,172,505, issued Jan. 9, 2001, entitled ELECTRONIC BATTERY TESTER; U.S. Pat. No. 6,222,369, issued Apr. 24, 2001, entitled METHOD AND APPARATUS FOR DETERMINING BATTERY PROPERTIES FROM COMPLEX IMPEDANCE/ADMITTANCE; U.S. Pat. No. 6,225,808, issued May 1, 2001, entitled TEST COUNTER FOR ELECTRONIC BATTERY TESTER; U.S. Pat. No. 6,249,124, issued Jun. 19, 2001, entitled ELECTRONIC BATTERY TESTER WITH INTERNAL BATTERY; U.S. Pat. No. 6,259,254, issued Jul. 10, 2001, entitled APPARATUS AND METHOD FOR CARRYING OUT DIAGNOSTIC TESTS ON BATTERIES AND FOR RAPIDLY CHARGING BATTERIES; U.S. Pat. No. 6,262,563, issued Jul. 17, 2001, entitled METHOD AND APPARATUS FOR MEASURING COMPLEX ADMITTANCE OF CELLS AND BATTERIES; U.S. Pat. No. 6,294,896, issued Sep. 25, 2001; entitled METHOD AND APPARATUS FOR MEASURING COMPLEX SELF-IMMITANCE OF A GENERAL ELECTRICAL ELEMENT; U.S. Pat. No. 6,294,897, issued Sep. 25, 2001, entitled METHOD AND APPARATUS FOR ELECTRONICALLY EVALUATING THE INTERNAL TEMPERATURE OF AN ELECTROCHEMICAL CELL OR BAT-

TERY; U.S. Pat. No. 6,304,087, issued Oct. 16, 2001, entitled APPARATUS FOR CALIBRATING ELECTRONIC BATTERY TESTER; U.S. Pat. No. 6,310,481, issued Oct. 30, 2001, entitled ELECTRONIC BATTERY TESTER; U.S. Pat. No. 6,313,607, issued Nov. 6, 2001, entitled METHOD AND APPARATUS FOR EVALUATING STORED CHARGE IN AN ELECTROCHEMICAL CELL OR BATTERY; U.S. Pat. No. 6,313,608, issued Nov. 6, 2001, entitled METHOD AND APPARATUS FOR CHARGING A BATTERY; U.S. Pat. No. 6,316,914, issued Nov. 13, 2001, entitled TESTING PARALLEL STRINGS OF STORAGE BATTERIES; U.S. Pat. No. 6,323,650, issued Nov. 27, 2001, entitled ELECTRONIC BATTERY TESTER; U.S. Pat. No. 6,329,793, issued Dec. 11, 2001, entitled METHOD AND APPARATUS FOR CHARGING A BATTERY; U.S. Pat. No. 6,331,762, issued Dec. 18, 2001, entitled ENERGY MANAGEMENT SYSTEM FOR AUTOMOTIVE VEHICLE; U.S. Pat. No. 6,332,113, issued Dec. 18, 2001, entitled ELECTRONIC BATTERY TESTER; U.S. Ser. No. 09/293,020, filed Apr. 16, 1999, entitled AUTOMOTIVE BATTERY CHARGING SYSTEM TESTER; U.S. Ser. No. 09/560,920, filed Apr. 28, 2000, entitled MULTI-LEVEL CONDUCTANCE TESTER; U.S. Ser. No. 09/431,446, filed Nov. 1, 1999, entitled ALTERNATOR DIAGNOSTIC SYSTEM; U.S. Ser. No. 09/595,102, filed Jun. 15, 2000, entitled APPARATUS AND METHOD FOR TESTING RECHARGEABLE ENERGY STORAGE BATTERIES; U.S. Ser. No. 09/703,270, filed Oct. 31, 2000, entitled ELECTRONIC BATTERY TESTER; U.S. Ser. No. 09/575,629, filed May 22, 2000, entitled VEHICLE ELECTRICAL SYSTEM TESTER WITH ENCODED OUTPUT; U.S. Ser. No. 09/780,146, filed Feb. 9, 2001, entitled STORAGE BATTERY WITH INTEGRAL BATTERY TESTER; U.S. Ser. No. 09/816,768, filed Mar. 23, 2001, entitled MODULAR BATTERY TESTER; U.S. Ser. No. 09/756,638, filed Jan. 8, 2001, entitled METHOD AND APPARATUS FOR DETERMINING BATTERY PROPERTIES FROM COMPLEX IMPEDANCE/ADMITTANCE; U.S. Ser. No. 09/862,783, filed May 21, 2001, entitled METHOD AND APPARATUS FOR TESTING CELLS AND BATTERIES EMBEDDED IN SERIES/PARALLEL SYSTEMS; U.S. Ser. No. 09/483,623, filed Jan. 13, 2000, entitled ALTERNATOR TESTER; U.S. Ser. No. 09/870,410, filed May 30, 2001, entitled INTEGRATED CONDUCTANCE AND LOAD TEST BASED ELECTRONIC BATTERY TESTER; U.S. Ser. No. 09/960,117, filed Sep. 20, 2001, entitled IN-VEHICLE BATTERY MONITOR; U.S. Ser. No. 09/908,389, filed Jul. 18, 2001, entitled BATTERY CLAMP WITH INTEGRATED CIRCUIT SENSOR; U.S. Ser. No. 09/908,278, filed Jul. 18, 2001, entitled BATTERY CLAMP WITH EMBEDDED ENVIRONMENT SENSOR; U.S. Ser. No. 09/880,473, filed Jun. 13, 2001, entitled BATTERY TEST MODULE; U.S. Ser. No. 09/876,564, filed Jun. 7, 2001, entitled ELECTRONIC BATTERY TESTER; U.S. Ser. No. 09/878,625, filed Jun. 11, 2001, entitled SUPPRESSING INTERFERENCE IN AC MEASUREMENTS OF CELLS, BATTERIES AND OTHER ELECTRICAL ELEMENTS; U.S. Ser. No. 09/902,492, filed Jul. 10, 2001, entitled APPARATUS AND METHOD FOR CARRYING OUT DIAGNOSTIC TESTS ON BATTERIES AND FOR RAPIDLY CHARGING BATTERIES; and U.S. Ser. No. 09/940,684, filed Aug. 27, 2001, entitled METHOD AND APPARATUS FOR EVALUATING STORED CHARGE IN AN ELECTROCHEMICAL CELL OR BATTERY; U.S. Ser. No. 09/977,049, filed Oct. 12, 2001, entitled PROGRAMMABLE CURRENT EXCITER FOR MEASURING AC IMMITTANCE

OF CELLS AND BATTERIES; U.S. Ser. No. 10/047,923, filed Oct. 23, 2001, entitled AUTOMOTIVE BATTERY CHARGING SYSTEM TESTER, U.S. Ser. No. 10/046,659, filed Oct. 29, 2001, entitled ENERGY MANAGEMENT SYSTEM FOR AUTOMOTIVE VEHICLE; U.S. Ser. No. 09/993,468, filed Nov. 14, 2001, entitled KELVIN CONNECTOR FOR A BATTERY POST; U.S. Ser. No. 09/992,350, filed Nov. 26, 2001, entitled ELECTRONIC BATTERY TESTER, U.S. Ser. No. 10/042,451, filed Jan. 8, 2002, entitled BATTERY CHARGE CONTROL DEVICE; and U.S. Ser. No. 10/073,378, (C382.12-0111), filed Feb. 8, 2002, entitled METHOD AND APPARATUS USING A CIRCUIT MODEL TO EVALUATE CELL/BATTERY PARAMETERS, which are incorporated herein in their entirety.

As storage batteries have found increasing use in various industries, the use of electronic battery testers to test those batteries has expanded. Example uses include batteries for vehicles (with or without internal combustion engines) and batteries for back up power supplies such as those used in telecommunication installations.

To address this increased use, various diagnostic and testing techniques and systems for use with storage batteries have advanced in recent times. However, a typical electronic battery tester simply provides an output which is viewed by a user or technician. The data is used to make a determination regarding the condition and possible need for replacement of a storage battery. Once that determination is made, the output from the battery tester is typically discarded when the battery tester is disconnected.

The increasing use of electronic battery testers has resulted in an increasing number of battery tests which are performed and consequently resulted in an increased amount of data related to storage batteries. However, advantages from this increased amount of data has been largely unrecognized.

SUMMARY OF THE INVENTION

An electronic battery tester for testing a storage battery includes test circuitry configured to couple to the storage battery and provide a battery test output related to a condition of the battery. A memory is configured to store a battery tester address of the battery tester. Communication circuitry transmits the battery test output formatted with the battery tester address on a communication link to a remote location.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a simplified block diagram of a battery tester in accordance with one example embodiment of the present invention.

FIG. 2 is a simplified flow chart showing steps in accordance with one example embodiment of the invention.

FIG. 3 is a simplified block diagram showing steps associated with retrieving data in accordance with one example embodiment of the invention.

FIG. 4 is a simplified block diagram showing steps in accordance with receiving battery test data.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention includes the recognition that the output from electronic battery testers can provide useful diagnostic or other information for analysis to a remote location. In one aspect, the present invention includes pro-

5

viding an electronic battery tester with a battery tester address and transmitting the result of a battery test, data recovered the test during or from the battery, or related to the battery test, to a remote location in a manner in which the battery tester address is formatted (i.e., in some way combined or associated with) with the battery test data. This information is transmitted to a remote location for subsequent review or processing. Similarly, the battery tester can receive information when the information is associated with the battery tester address.

FIG. 1 is a simplified block diagram showing an electronic battery tester 10 in accordance with one example embodiment of the present invention. Electronic battery tester 10 couples to storage battery 12 through electrical connections 14. In one embodiment, connections 14 are Kelvin connections. However, the invention is not limited to such a configuration. The connection can be any type of connection including non-physical connections and can comprise any number of connections. Electronic battery tester 10 includes test circuitry 16 which is configured to perform a test on battery 12 using any type of known or yet to be discovered battery test and provide a battery test result (or output) 17.

A memory 18 contains a battery tester address associated with the battery tester 10. In some embodiments, the address is not unique. Communication circuitry 20 couples to the test circuitry 16 and the memory 18 and is configured to format information related to the battery test (battery test data) along with the battery tester address on a communication link 22. Line 22 can, for example, couple to a remote location 24. The communication link 22 can operate bidirectionally or in a single direction, carrying data between tester 10 and remote location 24. The link 22 can be a network, such as a computer network. Example network implementations include ethernet, token ring, PPP (point to point protocol), SLIP, or other protocols including proprietary protocols.

FIG. 1 also illustrates an optional output 28 which can be used to provide an output related to the battery test. Similarly, an optional input 30 can be used to input data. For example, the data can relate to the type of battery 12 or be used in the determination of a relative condition of battery 12, for example by receiving a battery rating. The output 28 and the input 30 can be for use by an operator, such as a display and a manual input, or it can be coupled to other equipment. The input 30 and output 28 can be over physical or non-physical connections. The various components of battery tester 10 including output 28 and input 30, can be implemented using any number of components and FIG. 1 is provided to illustrate a simplified block diagram. With microprocessor based circuitry, the various blocks illustrated in FIG. 1 may be implemented in shared components and their physical implementation may not break down into the discrete blocks illustrated in the Figure. The various components can be implemented in hardware, software or their combination.

FIG. 2 is a simplified block diagram 50 showing example steps in accordance with the present invention. The various steps shown in FIG. 2 may be implemented in any order, or wholly or partially in parallel, and are not limited to the particular implementation shown in the Figure. At block 52, the process starts and control is passed to block 54 where the storage battery 12 is tested. At optional block 56, battery test data is obtained. This can be any data which is related to the battery test and may or may not include the battery test result obtained at block 54. At block 58, the address of the battery tester 10 is obtained from memory 18. At block 60, tester 10

6

formats the battery test data with the battery tester address. The formatted data is transmitted over communication link 22 at block 62.

The battery test performed at block 54 by test circuitry 16 can be any known or yet to be discovered battery test. In one aspect, the battery test is based upon a dynamic measurement, that is a measurement in which a time varying signal is used in performing the battery test. In another example aspect, electrical connections 14 comprise Kelvin connections.

The battery test output 17 can be any type of output from a battery test including a qualitative or a quantitative output. The optional battery test related data can be any type of data related to the battery test including various measurements used in obtaining the battery test output (such as voltages, currents, information related to timing, time periods, signals and waveforms, etc.) or other types of data including temperature (either ambient or some other temperature such as the temperature of battery 12), battery serial number, model number, vehicle identification or serial number, geographic related information, time and/or date information, data which identifies the operator, the steps performed by the operator or the battery test, the vehicle VIN number, data obtained from the vehicle computer or computer system, data related to the architecture of a backup or auxiliary battery site including the equipment, number of battery strings and types of batteries, maintenance related data, etc. The data can be obtained from existing or yet to be implemented vehicle communication bus structures including the CAN bus, J1939, J1850, etc. Other types of data includes bar code information, dealer information, codes such as warranty codes, count information related to how many times or when a particular battery tester was used, information relating to promotions or sales, etc. Additionally, data can be a compilation of data collected over a period of time, either raw data or data which has been analyzed or otherwise used by the battery tester.

FIG. 3 is a simplified block diagram 70 showing steps associated with the receiving of data by electronic battery tester 10 over communication link 22. The procedure starts at 72 and at block 74 the formatted data is received from bus 22. This formatted data is of a similar format to that discussed in connection with FIG. 2 and contains information along with the address of the electronic battery tester 10. The formatted data is extracted and retrieved at step 76 and some type of action is performed at step 78. The particular type of action can be any type of action including actions in which the retrieved data is acted upon as a function of the retrieved data, stored in memory 18 for future use, immediately displayed or otherwise utilized by battery tester 10, etc.

Communication link 22 is any type of physical or non-physical communication link, or a combination. Examples include electrical wiring, infrared, Radio Frequency (RF), etc. The data carried on communication link 22 can be unidirectional or bi-directional and can be in accordance with any communication protocol. The data carried on communication link can be in an encrypted format in accordance with any encryption technique. In various aspects, the address of battery tester 10 can be a shared address, a locally unique address or a globally unique address.

One example protocol for data on link 22 is the TCP/IP protocol. In such an embodiment, the address of battery tester 10 can be an IP (Internet Protocol) address. For example, RFC791 promulgated by the Internet Engineering Taskforce in September 1981 defines such an address. In one

specific example, the address consists of at least four groups of data, each group comprises at least 8 bits.

Data can be sent in response to an event at battery tester **10**, at particular times, or in response to polling from remote location **24**. If a two-way communication link **22** is used, data and/or programming instructions in tester **10** can be updated as desired and tester **10** can be controlled from a remote location.

Remote location **24** can collect data from one or more battery testers. The data can be placed into a database format for subsequent analysis. For example, statistics of the data can be calculated and used in order to diagnose or research battery failures, sales trends, usage, or other aspects related to battery tests, installation, use and ultimate failure. Additionally, data can be correlated with vehicles, geographical areas, dealers, etc., including how battery testers are being used.

When retrieving data, various types of information can be retrieved by electronic battery tester **10**. For example, battery test parameters or test criteria can be automatically updated as can tables or battery ratings. The battery tester software can be updated as desired as new releases become available. Service bulletins related to a particular test, or particular type of battery, particular vehicle or problem associate with a battery or battery test can be provided to the operated or stored in the memory for future use. The test procedures for unusual cars, or tests which are difficult to perform, can be looked up on a remote database. An authorization can be received in which the operator receives an authorization to replace a battery, for example a battery which is under warranty. The authorizations can be a function of data contained at a remote location, for example if a particular location has an unusually high rate of warranty returns, a request for authorization to return a battery could be denied, or otherwise identified for subsequent auditing. The battery tester **10** can also take advantage of increased computing power which might be available at a remote location. Data available over the internet can be retrieved for use during the test. For example, weather information or statistics can be obtained for a particular area such that the battery test is modified as function of the current or predicted weather. If a cold period is imminent, for example, a harsher test can be employed. If a battery is replaced, an inventor list can be updated such that a inventory is reordered, for example, by sending an e-mail or other communication to a distributor. If the battery itself has a unique identification, for example a serial number, this information can be used to monitor the battery from "cradle to grave". For example, various tests performed throughout the life of the battery can be utilized to observe trends in the battery test. Further, service alerts or other information can be linked to a battery.

FIG. 4 is a simplified block diagram **100** showing steps performed in accordance with receiving data from an electronic battery tester in accordance with the present invention. The receiving can be, for example, at a remote manufacturing or management site. At block **102** the procedure starts and control is passed to block **104** where a data pack is received from the electronic battery tester over the communication link. At block **106**, the data packet is parsed into the address which identifies the electronic battery tester and the battery test data contained within the data packet. At block **108**, the battery test data is stored or otherwise operated upon. Various examples of such operations are discussed above.

Although the present invention has been described with reference to preferred embodiments, workers skilled in the

art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

What is claimed is:

1. An electronic battery tester for testing a storage battery, comprising:
 - test circuitry configured to couple to the storage battery measure a dynamic parameter of the storage battery and responsively provide a battery test output related to a condition of the battery measured through Kelvin connections to the battery;
 - a memory configured to store a battery tester address of the battery tester; and
 - communication circuitry configured to transmit battery test data formatted with the battery tester address on a communication link to a remote location.
2. The apparatus of claim 1 wherein the communication link comprises a physical connection.
3. The apparatus of claim 1 wherein the communication link comprises a non-physical connection.
4. The apparatus of claim 1 wherein the communication link is in accordance with TCP/IP.
5. The apparatus of claim 1 wherein the address comprises an IP address.
6. The apparatus of claim 5 wherein the IP address comprises four groups of eight bits each.
7. The apparatus of claim 1 wherein the address comprises a unique address.
8. The apparatus of claim 1 wherein the communication link is bi-directional.
9. The apparatus of claim 8 wherein the battery tester retrieves test parameter updates.
10. The apparatus of claim 8 wherein the battery tester receives software updates.
11. The apparatus of claim 8 wherein the battery tester receives service bulletins.
12. The apparatus of claim 8 wherein the battery tester receives weather related information.
13. The apparatus of claim 8 wherein the battery tester receives information related to the specific battery under test.
14. The apparatus of claim 1 including a user input.
15. The apparatus of claim 14 wherein the battery test data includes data received through the user input.
16. The apparatus of claim 15 wherein the data received through the user input comprises a battery rating.
17. The apparatus of claim 15 wherein the data received through the user input comprises a battery type.
18. The apparatus of claim 1 including a display configured to provide an output related to the condition of the battery.
19. The apparatus of claim 1 wherein the battery test data includes the output related to the condition of the battery.
20. The apparatus of claim 1 wherein the battery test data includes data used by the test circuitry to determine the condition of the battery.
21. The apparatus of claim 1 wherein the battery test data includes data received through a bar code.
22. The apparatus of claim 1 wherein the battery test data includes data which identifies a dealer.
23. The apparatus of claim 1 wherein the battery test data includes a warranty code.
24. The apparatus of claim 1 wherein the battery test data includes a compilation of data.
25. The apparatus of claim 1 wherein the battery test data is encrypted.

26. The apparatus of claim 1 wherein the battery test data is transmitted on the communication link at predetermined times.

27. The apparatus of claim 1 wherein the battery test data is transmitted on the communication link in response to polling of the battery tester.

28. The apparatus of claim 1 wherein the battery test data includes a vehicle identification number (VIN).

29. The apparatus of claim 1 wherein the battery test data includes data retrieved from a data bus of a vehicle.

30. A method for testing a storage battery with a battery tester, comprising:

coupling to the storage battery through a Kelvin connection measuring a dynamic parameter of the storage battery and responsively providing a battery test output related to a condition of the battery;

retrieving a battery tester address of the battery tester from a memory; and

transmitting battery test data formatted with the battery tester address on a communication link to a remote location.

31. The method of claim 30 wherein the communication link comprises a physical connection.

32. The method of claim 30 wherein the communication link comprises a non-physical connection.

33. The method of claim 30 wherein the communication link is in accordance with TCP/IP.

34. The method of claim 30 wherein the address comprises an IP address.

35. The method of claim 34 wherein the IP address comprises four groups of eight bits each.

36. The method of claim 35 wherein the battery test data includes the user input.

37. The method of claim 36 wherein the user input comprises a battery rating.

38. The method of claim 36 wherein the user input comprises a battery type.

39. The method of claim 30 wherein the address comprises a unique address.

40. The method of claim 30 wherein the communication link is bi-directional.

41. The method of claim 30 including receiving a user input.

42. The method of claim 30 including displaying an output related to the condition of the battery.

43. The method of claim 30 wherein the battery test data includes data used by the test circuitry to determine the condition of the battery.

44. The method of claim 30 wherein the battery test data includes data received through a bar code.

45. The method of claim 30 wherein the battery test data includes data which identifies a dealer.

46. The method of claim 30 wherein the battery test data includes a warranty code.

47. The method of claim 30 wherein the battery test data includes a compilation of data.

48. The method of claim 30 including encrypting the battery test data.

49. The method of claim 30 including transmitting battery test data on the communication link at predetermined times.

50. The method of claim 30 wherein the battery test data is transmitted on the communication link in response to polling of the battery tester.

51. The method of claim 30 wherein the battery test data includes a vehicle identification number (VIN).

52. The method of claim 30 including retrieving the battery test data from a data bus of a vehicle.

53. The method of claim 30 including retrieving test parameter updates on the link.

54. The method of claim 30 including receiving software updates on the link.

55. The method of claim 30 including receiving service bulletins on the link.

56. The method of claim 30 including receiving weather related information on the link.

57. The method of claim 30 including receiving information related to the specific battery under test on the link.

* * * * *